

W14 LOADER

TABLE OF CONTENTS

SERIES/SECTION	SECTION NO.	FORM NO.
10 SERIES-GENERAL		
General Engine Specifications	1010	9-75616
Detailed Engine Specifications	1023	9-78646
Maintenance and Lubrication	1050	9-72536
Torque Chart	1051	9-72536
20 SERIES-ENGINE		
Engine Diagnosis	2001	9-76365
Engine Tune-Up	2002	9-76379
Cylinder Head, Valve Train and Camshaft	2015	9-76166
Cylinder Block, Sleeves, Pistons and Rods	2025	9-76176
Crankshaft, Main Bearings, Flywheel and Oil Seal Replacement	2035	9-76187
Lubrication System	2047	9-78667
Stall Checks and Engine Removal and Installation	2050	9-72536
Backhoe Throttle Cable Adjustment	2050A	9-72535
Air Cleaner and Spark Arrester	2051	9-72536
Cooling System	2055	9-76337
30 SERIES-FUEL SYSTEM		
Fuel System and Filters	3010	9-75297
Robert Bosch Fuel Injection Pump	3012	9-74937
Roosa Master Fuel Injectors	3013	9-74959
Electric Fuel Pump	3051	9-72535
Fuel Lines and Fuel Tank	3052	9-72536
40 SERIES - HYDRAULICS		
Hydraulic Diagram, Trouble Shooting, Testing and Adjustments	4011	9-72536
Backhoe Hydraulic Diagrams, Trouble Shooting, Pressure Checks	4011A	9-72535
Hydraulic Pump	4012	9-72535
L51290 and L52776 Loader Control Valves	4020	9-72536
Case Backhoe Control Valve	4022	9-72535
L55038 Diverter Valve	4027	9-72535
L56060 Backhoe Relief Valve	4042	9-72535
Loader Cylinders	4050	9-72535
Backhoe Cylinders	4051	9-72535
50 SERIES-STEERING		
Hydraulic Diagram, Trouble Shooting and Testing	5011	9-72535
Steering Control Valve and Flow Control Valve	5013	9-72536
Steering Cylinders	5015	9-72535
Center Pivot	5018	9-72535


Reprinted

SERIES/SECTION	SECTION NO.	FORM NO.
60 SERIES-POWER TRAIN		
Allison Transmissions - Powershift Model	Manual	SA 1277C
Transmission Removal and Installation	6012	9-72536
Differentials and Planetaries	6020	9-72536
Rear Axle Trunnion Center Bearing Support, Drive Shafts and Universal Joints	6022	9-72536
70 SERIES-BRAKES		
Air System Operation and Diagram	7011	9-72536
Pressurizing/Depressurizing the Air System	7012	9-72536
Brake Shoes and Wheel Cylinders	7013	9-72535
L52092 Air Compressor, Governor and Reservoir	7014	9-72536
L17683 Air Compressor	7014A	9-72535
Brake Valve	7015	9-72536
Brake Actuator	7016	9-72535
Parking Brake Actuator and Control Valve	7017	9-72536
Pressure Protection Valve and Pressure Reducing Valve	7018	9-72536
Air Horn and Horn Valve	7019	9-72535
Alcohol Evaporator	7020	9-72535
Double Check Valve/Stop Light Switch	7021	9-72536
80 SERIES-ELECTRICAL		
Wiring Diagram - Machines without Instrument Clusters . .	8011	9-72537
Trouble Shooting and Adjustments	8012	9-72536
Batteries	8014	9-72535
Starter, Starter Solenoid and Magnetic Switches	8015	9-72536
35 amp Alternator, (Models without Instrument Cluster). .	8016	9-72536
30 amp Alternator, (Models with Instrument Cluster). . . .	8016A	9-72535
90 SERIES-MOUNTED EQUIPMENT		
Loader	9011	9-72535
Model 26C Backhoe	9012	9-72535
Roll-Over Protection Structure	9019	9-72535

Section 1010

GENERAL ENGINE SPECIFICATIONS W14 LOADER

THE MODEL AND ENGINE SERIAL NUMBER IS STAMPED ON A PLATE LOCATED ON THE SIDE OF THE ENGINE ABOVE THE CRANKING MOTOR.

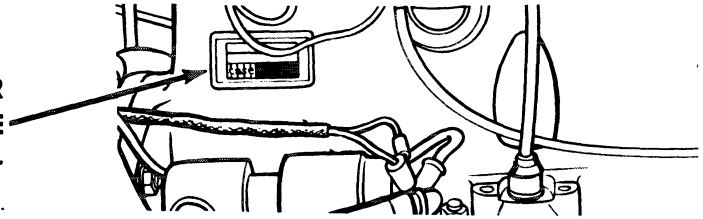

DIESEL ENGINES

General

Type	4 Cylinder, 4 Stroke Cycle, Valve-in-Head
Firing Order	1-3-4-2
Bore	4-5/8 Inches
Stroke	5 Inches
Piston Displacement	336 Cubic Inches
Compression Ratio	16.5 to 1
No Load Governed Speed	2330 to 2370 RPM
Rated Engine Speed	2200 RPM
Engine Idling Speed	725 to 775 RPM
Exhaust Valve Rotators	Positive Type
*Valve Tappet Clearance (Exhaust)	(Hot) .020 Inch (Cold) .025 Inch
(Intake)	(Hot and Cold) .015 Inch
*Hot Settings Are Made After the Engine Has Operated At Thermostat Controlled Temperature For At Least Fifteen Minutes.	
Cranking Motor	24 Volt Negative Ground
Thermostat Operating Range	175°F. to 202°F.

Piston and Connecting Rods

Rings per Piston	3
Number of Compression Rings	2
Number of Oil Rings	1
Type Pins	Full Floating Type
Type Bearing	Replaceable Precision, Steel Back, Copper-Lead Alloy Liners

Main Bearings

Number of Bearings	5
Type Bearings	Replaceable Precision Steel Back, Copper-Lead Alloy Liners

Engine Lubricating System

Oil Pressure	45 to 60 Pounds with Engine Warm and Operating at Rated Engine Speed
Type System	Pressure and Spray Circulation
Oil Pump	Gear Type
Oil Filter	Full Flow Spin on Type
Engine Oil Capacity (without filter change)	10 U.S. Quarts
(with filter change)	11 U.S. Quarts

Fuel System

Fuel Injection Pump	Robert Bosch, Type PES Multiple Plunger
Pump Timing	31 Degrees Before Top Dead Center (Port Closing)
Fuel Injectors	Pencil Type (Opening Pressure 3200 PSI)
Fuel Transfer Pump	Plunger Type, Integral Part of Injection Pump
Governor	Variable Speed, Fly-Weight Centrifugal Type, Integral Part of Injection Pump
1st Stage Fuel Filter	Full Flow Spin on Type
2nd Stage Fuel Filter	Full Flow Spin on Type

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>

Section 1023

SPECIFICATION DETAILS 336BD AND 336BDT ENGINE

Written In *Clear
And
Simple
English*

TABLE OF CONTENTS

RUN-IN INSTRUCTIONS	4
ENGINE SPECIFICATION DETAILS	
Cylinder Sleeves	5
Piston with 1.62" (41.15 mm) Pin Bore	5
Piston with 1.80" (45.72 mm) Pin Bore	5
Piston Pin for Piston with 1.62" (41.15 mm) Pin Bore	5
Piston Pin for Piston with 1.80" (45.72 mm) Pin Bore	5
Piston Rings	6
Connecting Rod For Piston with 1.62" (41.15 mm) Pin Bore	6
Connecting Rod For Piston with 1.80" (45.72 mm) Pin Bore	6
Crankshaft with 3" (76.2 mm) Main Bearing Journals	7
Crankshaft with 3.5 " (88.9 mm) Main Bearing Journals	7
Camshaft	8
Valve Push Rod Lifters	8
Gear Train	9
Oil Pump and Two Gear Balancer	9
Oil Pump and Three Gear Balancer	9
Oil Pump, Front Mount	10
Cylinder Head	11
Exhaust Valve	11
Intake Valve	11
Intake and Exhaust Valve Guides	12
Valve Spring	12
Rocker Arm Assembly	12
Intake Valve Timing	12
SPECIAL TORQUES	13-14
GENERAL TORQUE SPECIFICATION TABLE	15

RUN-IN INSTRUCTIONS

Engine Lubrication

Fill the engine crankcase with CASE HDM oil and install new engine oil filters, after an engine has been rebuilt.

NOTE: Use a *SERIES 3 DS or CD SERVICE CLASSIFICATION* oil that has the correct viscosity rating for ambient air temperature, if CASE HDM oil is not used.

Change the engine oil while the engine is hot and replace the engine oil filters, after the first 20 hours of operation.

Change the engine oil and filters at the given intervals, after the 20 hours, as found in the Operator's Manual.

Run-In Procedure For Rebuilt Engines (With A Dynamometer)

The following procedure must be followed when using a PTO dynamometer to run-in the engine. The dynamometer will make sure of the control of the engine load at each speed and will remove stress on new parts during run-in.

During the run-in, continue to check the oil pressure, coolant level and coolant temperature.

STEP	TIME	ENGINE SPEED	DYNAMOMETER SCALE LOAD*
1	**10 Minutes	1000 RPM	Not Any
2	**10 Minutes	1800 RPM	Not Any
3	20 Minutes	1800 RPM	1/3
4	20 Minutes	1800 RPM	1/2
5	***30 Minutes	100 RPM below rated speed	3/4
6	Tighten the cylinder head bolts to the torque that is found in Section 2015 of the service manual.		

* According to normal dynamometer scale load at rated speed for the specific vehicle model. Decrease this scale load as shown.

** The best run-in procedure will constantly change the throttle between 750 to 1000 RPM, for the first 10 minutes and from 1000 to 1800 RPM, for the next 10 minutes. The purpose of this changing RPM is to change the lubrication and coolant flow.

*** 30 minutes at 3/4 load is a minimum amount of time the engine can be run. It is best that when possible, the engine (especially a turbocharged diesel) must be run for four (4) hours or more, at the above speed and load before checking the full engine horsepower or before using the engine for heavy field work.

Run-In Procedure For Rebuilt Engines (Without A Dynamometer)

STEP	TIME	ENGINE SPEED	LOAD
1	*10 Minutes	1000 RPM	Not Any
2	* 10 Minutes	1800 RPM	Not Any
3	30 Minutes	2/3 Rated RPM	Light Load
4	1 Hour	Full RPM (not over 2000 RPM)	80 to 90%
5	Tighten the cylinder head bolts to the torque that is found in Section 2015 of the service manual.		

* If engine must then run at or near full load to operate the machine, remove the load for the first hour and run at high idle for several minutes at 15 minute intervals.

Run-In Procedure

Keep in one gear lower than normal for the first 8 hours of field operation. DO NOT "lug" the engine for the next 12 hours. Prevent "lugging" by moving the shift lever to a lower gear. The engine must not be "lugged" below the Rated Engine RPM during the early hours of life.

ENGINE SPECIFICATION DETAILS

Cylinder Sleeves

	U.S. Value	Metric Value
Type	Wet, Can Be Replaced	
Material	Cast Iron	
ID of Sleeve	4.6250 to 4.6263"	117.475 to 117.508 mm
Maximum Service Limit	4.6283"	117.5588 mm
Sleeve Out of Round (Installed in Block)	0.002"	0.0508 mm
Maximum Service Limit	0.002"	0.0508 mm
Taper (Installed in Block)	0.001"	0.0254 mm
Maximum Service Limit	0.002"	0.051 mm
Clearance at Bottom of Piston,		
90 Degrees to Piston Pin	0.0052 to 0.0075"	0.1321 to 0.1905 mm
Maximum Service Limit	0.0100"	0.2540 mm

Piston with 1.62" (41.15 mm) Pin Bore

Type	Cam Ground	
Material	Aluminum Alloy	
OD At Bottom, 90 Degrees to Piston Pin	4.6188 to 4.6198"	117.3175 to 117.3429 mm
Minimum Service Limit	4.6178"	117.2921 mm
ID of Piston Pin Bore	1.6251 to 1.6253"	41.2775 to 41.2826 mm
Maximum Service Limit	1.6258"	41.2953 mm
Width of 1st Ring Groove	0.097 to 0.098"	2.464 to 2.489 mm
Maximum Service Limit	0.0985"	2.5019 mm
Width of 2nd Ring Groove	0.097 to 0.098"	2.464 to 2.489 mm
Maximum Service Limit	0.0985"	2.5019 mm
Width of 3rd Ring Groove	0.188 to 0.189"	4.775 to 4.801 mm
Maximum Service Limit	0.190"	4.826 mm

Piston with 1.80" (45.72 mm) Pin Bore

Type	Cam Ground	
Material	Aluminum Alloy	
OD at Bottom, 90 Degree to Piston Pin	4.6188 to 4.6198"	117.3175 to 117.3429 mm
Minimum Service Limit	4.6178"	117.2921 mm
ID of Piston Pin Bore	1.8001 to 1.8005"	45.7225 to 45.7327 mm
Maximum Service Limit	1.8010"	45.7454 mm
Width of 1st Ring Groove	Not Measureable	
Width of 2nd Ring Groove	Not Measureable	
Width of 3rd Ring Groove	0.188 to 0.189"	4.775 to 4.801 mm
Maximum Service Limit	0.190"	4.826 mm

Piston Pin for Piston with 1.62" (41.15 mm) Pin Bore

Type	Floats	
OD of Pin	1.6244 to 1.6246"	41.2598 to 41.2648 mm

Piston Pin for Piston with 1.80" (45.72 mm) Pin Bore

Type	Floats	
OD of Pin	1.7994 to 1.7996"	45.7048 to 45.7098 mm

Piston Rings

	U.S. Value	Metric Value
Number One Compression (Top)	Square Type with Chrome Face	
End Gap in 4.625" (117.475 mm) ID Sleeve	0.015 to 0.025"	0.381 to 0.635 mm
Maximum Service Limit	0.030"	0.762 mm
Side Clearance	0.0035 to 0.0050"	0.0889 to 0.127 mm
Maximum Service Limit	0.006"	0.152 mm
Number One Compression (Top)	Keystone Type	
End Gap in 4.625" (117.475 mm) ID Sleeve	0.015 to 0.025"	0.381 to 0.635 mm
Maximum Service Limit	0.030"	0.762 mm
Side Clearance	Not Measureable	
Number Two Compression (Intermediate)	Square Type with Tapered Face	
End Gap in 4.625" (117.475 mm) ID Sleeve	0.013 to 0.023"	0.330 to 0.584 mm
Maximum Service Limit	0.028"	0.711 mm
Side Clearance	0.003 to 0.005"	0.076 to 0.127 mm
Maximum Service Limit	0.006"	0.152 mm
Number Two Compression (Intermediate)	Keystone Type	
End Gap in 4.625" (117.475 mm) ID Sleeve	0.015 to 0.025"	0.381 to 0.635 mm
Maximum Service Limit	0.030"	0.762 mm
Side Clearance	Not Measureable	
Number Three Oil Control Ring (Bottom)	Two Piece	
Width	0.1860 to 0.1865"	4.7244 to 4.7371 mm
End Gap in 4.625" (117.475 mm) ID Sleeve	0.016 to 0.026"	0.406 to 0.660 mm
Maximum Service Limit	0.031"	0.787 mm
Side Clearance	0.0015 to 0.003"	0.0381 to 0.0762 mm
Maximum Service Limit	0.0035"	0.0889 mm

Connecting Rod for Piston with 1.62" (41.15 mm) Pin Bore

Bushing	Replaceable	
Bushing ID, Installed (Ream to Size)	1.6254 to 1.6258"	41.2852 to 41.2953 mm
Maximum Service Limit	1.6265"	41.3131 mm
Bearing Liners	Replaceable	
Bearing Liner Width	1.586 to 1.596"	40.284 to 40.538 mm
Bore ID without Bearing Liners	2.9003 to 2.9013"	73.6676 to 73.6930 mm
Bearing Oil Clearance	0.0013 to 0.0038"	0.0330 to 0.0965 mm
Maximum Service Limit	0.0043"	0.1092 mm
Undersize Bearings for Service	0.002, 0.010, 0.020, 0.030"	0.051, 0.254, 0.508, 0.762 mm
Side Clearance	0.007 to 0.016"	0.178 to 0.406 mm

Connecting Rod for Piston with 1.80" (45.72 mm) Pin Bore

Bushing	Replaceable	
Bushing ID, Installed (Ream to Size)	1.8004 to 1.8008"	45.7302 to 45.7403 mm
Maximum Service Limit	1.8015"	45.7581 mm
Bearing Liners	Replaceable	
Bearing Liner Width	1.586 to 1.596"	40.284 to 40.538 mm
Bore ID without Bearing Liners	3.1503 to 3.1513"	80.0176 to 80.043 mm
Bearing Oil Clearance	0.0013 to 0.0038"	0.0330 to 0.0965 mm
Maximum Service Limit	0.0043"	0.1092 mm
Undersize Bearings for Service	0.002, 0.010, 0.020, 0.030"	0.051, 0.254, 0.508, 0.762 mm
Side Clearance	0.007 to 0.016"	0.178 to 0.406 mm

Crankshaft with 3" (76.2 mm) Main Bearing Journals

	U.S. Value	Metric Value
Type	Forged, Heat Treated and Balanced	
End Play, Number Five Main Bearing Cap	0.003 to 0.015"	0.076 to 0.381 mm
Thrust Bearing, Standard Thickness	0.184 to 0.186"	4.674 to 4.724 mm
Thrust Bearing, Oversize Thickness for Service	0.190 to 0.192"	4.826 to 4.877 mm
Connecting Rod Journal Width	1.9975 to 2.0025"	50.7365 to 50.8635 mm
Connecting Rod Journal, Standard OD	2.748 to 2.749"	69.799 to 69.825 mm
0.010" (0.254 mm) OD Undersize, Grind to	2.738 to 2.739"	69.545 to 69.571 mm
0.020" (0.508 mm) OD Undersize, Grind to	2.728 to 2.729"	69.291 to 69.317 mm
0.030" (0.762 mm) OD Undersize, Grind to	2.718 to 2.719"	69.037 to 69.063 mm
Connecting Rod Journal Maximum Taper	0.0005"	0.0127 mm
Connecting Rod Journals Out of Round	0.0005"	0.0127 mm
Main Bearing Liners	Replaceable	
Main Bearing Liner Width, 1st, 3rd and 5th	2.1515 to 2.1615"	54.6481 to 54.9021 mm
Main Bearing Liner Width, 2nd and 4th	1.151 to 1.161"	29.235 to 29.489 mm
Main Bearing Oil Clearance	0.0016 to 0.0046"	0.0406 to 0.1168 mm
Maximum Service Limit	0.005"	0.127 mm
Undersize Main Bearing Liners for Service	0.002, 0.010, 0.020, 0.030"	0.051, 0.254, 0.508, 0.762 mm
Main Bearing Journal, Standard OD	2.998 to 2.999"	76.149 to 76.175 mm
0.010" (0.254 mm) OD Undersize, Grind to	2.988 to 2.989"	75.895 to 75.921 mm
0.020" (0.508 mm) OD Undersize, Grind to	2.978 to 2.979"	75.641 to 75.667 mm
0.030" (0.762 mm) OD Undersize, Grind to	2.968 to 2.969"	75.387 to 75.413 mm
Main Bearing Journal Bore ID without Liners	3.191 to 3.192"	81.051 to 81.077 mm
Main Bearing Journal Width		
2nd and 4th	1.555 to 1.570"	39.497 to 39.878 mm
3rd	2.623 to 2.627"	66.624 to 66.726 mm
5th	2.6175 to 2.6325"	66.4845 to 66.8655 mm

Crankshaft with 3.5" (88.9 mm) Main Bearing Journals

Type	Forged, Heat Treated and Balanced	
End Play, Number Three Main Bearing Cap	0.003 to 0.015"	0.076 to 0.381 mm
Thrust Bearing, Standard Thickness	0.155 to 0.157"	3.937 to 3.988 mm
Thrust Bearing, Oversize Thickness for Service	0.161 to 0.163"	4.089 to 4.140 mm
Connecting Rod Journal Width	1.9775 to 2.0025"	50.2285 to 50.8635 mm
Connecting Rod Journal, Standard OD	2.998 to 2.999"	76.149 to 76.175 mm
0.010" (0.254 mm) OD Undersize, Grind to	2.988 to 2.989"	75.895 to 75.921 mm
0.020" (0.508 mm) OD Undersize, Grind to	2.978 to 2.979"	75.641 to 75.667 mm
0.030" (0.762 mm) OD Undersize, Grind to	2.968 to 2.969"	75.387 to 75.413 mm
Connecting Rod Journal Maximum Taper	0.0005"	0.0127 mm
Connecting Rod Journals Out of Round	0.0005"	0.0127 mm
Main Bearing Liners	Replaceable	
Main Bearing Liner Width, 1st, 3rd and 5th	2.1515 to 2.1615"	54.6481 to 54.9021 mm
Main Bearing Liner Width, 2nd and 4th	1.214 to 1.224"	30.836 to 31.089 mm
Main Bearing Oil Clearance	0.0016 to 0.0046"	0.0406 to 0.1168 mm
Maximum Service Limit	0.005"	0.127 mm
Undersize Main Bearing Liners for Service	0.002, 0.010, 0.020, 0.030"	0.051, 0.254, 0.508, 0.762 mm

Crankshaft With 3.5" (88.9 mm) Main Bearing Journals (Continued)

	U.S. Value	Metric Value
Main Bearing Journal, Standard OD	3.498 to 3.499"	88.849 to 88.875 mm
0.010" (0.254 mm) OD Undersize, Grind to	3.488 to 3.489"	88.595 to 88.621 mm
0.020" (0.508 mm) OD Undersize, Grind to	3.478 to 3.479"	88.341 to 88.367 mm
0.030" (0.762 mm) OD Undersize, Grind to	3.468 to 3.469"	88.087 to 88.113 mm
Main Bearing Journal Bore ID without Liners	3.691 to 3.692"	93.751 to 93.777 mm
Main Bearing Journal Width		
2nd and 4th	1.618 to 1.633"	41.097 to 41.478 mm
3rd	2.561 to 2.565"	65.049 to 65.151 mm
5th	2.5855 to 2.6005"	65.6717 to 66.0527 mm

Camshaft

Type	Parabolic	
Bushing	Four, Replaceable	
Bushing Lubrication	Under Pressure	
ID of Bushing	2.2484 to 2.2514"	57.1094 to 57.1856 mm
Maximum Service Limit	2.2524"	57.2110 mm
Bushing Width		
1st (Front)	1.646 to 1.666"	41.808 to 42.316 mm
2nd and 3rd	1.4275 to 1.4475"	36.2585 to 36.7665 mm
4th	1.1462 to 1.1662"	29.1135 to 29.6215 mm
OD of Each Bearing Surface	2.2460 to 2.2470"	57.0484 to 57.0738 mm
Minimum Service Limit	2.2455"	57.0357 mm
Thrust Washer Thickness	0.1225 to 0.1275"	3.1115 to 3.2385 mm
Minimum Service Limit	0.1215"	3.0861 mm
Thrust Plunger Spring		
Free Length	3.625"	92.075 mm
OD of Spring	0.3912 to 0.4062"	9.9365 to 10.3175 mm
Compress to 2.750" (69.85 mm)	45 to 55 lbs.	200 to 245 N

Valve Push Rod Lifters

OD of Lifter Stem, Standard	0.8097 to 0.8102"	20.5664 to 20.5791 mm
OD of Lifter Stem, Oversize for Service	0.8190 to 0.8195"	20.8026 to 20.8153 mm
ID of Block Bore, Standard	0.8118 to 0.8130"	20.6197 to 20.6502 mm
Maximum Service Limit	0.8135"	20.6629 mm
ID of Block Bore, Oversize for Service	0.8215 to 0.8225"	20.8661 to 20.8915 mm

Gear Train

	U.S. Value	Metric Value
Backlash		
Crankshaft Gear to Camshaft Gear	0.004 to 0.011"	0.102 to 0.279 mm
Idler Drive Gear to Idler Gear	0.003 to 0.010"	0.076 to 0.254 mm
Idler Gear to Fuel Pump Gear	0.004 to 0.012"	0.102 to 0.305 mm
Crankshaft Gear to Oil Pump Gear	0.006 to 0.011"	0.152 to 0.279 mm
Crankshaft Gear to Fuel Pump Gear	0.027" Max.	0.686 mm Max.
OD of Idler Gear Shaft	1.7325 to 1.7330"	44.0055 to 44.0182 mm
ID of Idler Gear Bushing	1.7345 to 1.7355"	44.0563 to 44.0817 mm
Maximum Service Limit	1.7375"	44.1325 mm
Idler Gear Thrust Washer Thickness	0.061 to 0.063"	1.5494 to 1.6002 mm
Idler Gear Lateral Movement	0.002 to 0.012"	0.051 to 0.305 mm

Oil Pump and Two Gear Balancer

Positive Displacement Pump	Gear Type	
Pump Gears to Cover Clearance	0.005 max.	0.127 mm max.
Pump Gear to Housing - Radial Clearance	0.006" max.	0.152 mm max.
Backlash		
Crankshaft Gear to Counterweight Gear	0.008 to 0.013"	0.203 to 0.330 mm
Counterweight Gear to Counterweight Gear	0.003 to 0.024"	0.076 to 0.610 mm
Relief Valve Spring		
Free Length	2.000"	50.800 mm
Wire Diameter	0.080"	2.032 mm
Maximum OD of Spring	0.673"	17.094 mm
Number of Coils	11	11
Compress to 1.234" (31.344 mm)	24.4 to 26.2 lbs.	108 to 116 N

Oil Pump and Three Gear Balancer

Positive Displacement Pump	Gear Type	
Pump Gears to Cover Clearance	0.005" max.	0.127 mm max.
Backlash		
Crankshaft Gear to Counterweight Gear	0.008 to 0.013"	0.203 to 0.330 mm
Counterweight Gear to Counterweight Gear	0.005 to 0.013"	0.127 to 0.330 mm
Counterweight Gear and Drive Gear Bushing Wear	0.007 max.	0.178 mm max.
Relief Valve Spring		
Free Length	3.00"	76.20 mm
Wire Diameter	0.062"	1.575 mm
OD of Spring	0.515"	13.081 mm
Number of Coils	25	25
Compress to 1.68" (42.67 mm)	13.5 to 15.5 lbs.	60 to 69 N

Oil Pump, Front Mount

	U.S. Value	Metric Value
Positive Displacement Pump	Gear Type	
Backlash		
Pump Gear To Crankshaft Gear	0.006 to 0.011"	0.152 to 0.279 mm
Pump Gears to Body Radial Clearance	0.006" max.	0.152 mm max.
Pump Gears to Pump Cover Clearance	0.005" max.	0.127 mm max.
Oil Pressure at Rated Speed, Hot Oil	45 to 60 PSI	310 to 413 kPa
Relief Valve Spring - Inner		
Number of Coils	14.5	14.5
Direction of Coils	L.H.	L.H.
Wire Diameter	0.063"	1.600 mm
Maximum OD	0.454"	11.532 mm
Free Length	1.750"	44.450 mm
Compress to 1.234 (31.344)	16.4 to 17.6 lbs.	73 to 78 N
Relief Valve Spring - Outer (Also For Pumps With One Spring)		
Number of Coils	11	11
Direction of Coils	RH	RH
Wire Diameter	0.080"	2.032 mm
Minimum ID	0.493"	12.522 mm
Maximum OD	0.673"	17.094 mm
Free Length	2.000"	50.800 mm
Compress to 1.234 (31.344)	24.4 to 26.2 lbs.	108 to 116 N
Relief Valve Cup Plug Depth	0.375"	9.525 mm

Cylinder Head

	U.S. Value	Metric Value
Warpage	0.005"	0.127 mm

Exhaust Valve

Tappet Clearance	0.025"	0.635 mm
Face Angle	44 Degrees	44 Degrees
Face Run-Out	0.002" max.	0.051 mm
OD of Head	1.745 to 1.755"	44.323 to 44.577 mm
OD of Stem	0.402 to 0.403"	10.211 to 10.236 mm
Minimum Service Limit	0.4018"	10.2057 mm
OD of Taper at 4.2675" (108.3945 mm)	0.401 to 0.402"	10.185 to 10.211 mm
Minimum Service Limit	0.4008"	10.1803 mm
Length	6.4195 to 6.4405"	163.0553 to 163.5887 mm
Insert Seat Angle	45 Degrees	45 Degrees
Seat Contact Width	0.0800 to 0.1000"	2.0320 to 2.5400 mm
Seat Run-Out	0.002"	0.051 mm
Insert Height	0.3115 to 0.3175"	7.9121 to 8.0645 mm
OD of Insert	1.9455 to 1.9465"	49.4157 to 49.4411 mm
ID of Insert	1.569 to 1.579"	39.853 to 40.107 mm

Intake Valve - 45 Degree

Tappet Clearance	0.015"	0.381 mm
Face Angle	44 Degrees	44 Degrees
Face Run-Out	0.002" max.	0.051 mm
OD of Stem	0.402 to 0.403"	10.211 to 10.236 mm
Minimum Service Limit	0.4018"	10.2057 mm
OD of Head	1.995 to 2.005"	50.673 to 50.927 mm
Length	6.4195 to 6.4405"	163.0553 to 163.5887 mm
Seat Angle	45 Degrees	45 Degrees
Seat Contact Width	0.0775 to 0.0975"	1.9685 to 2.4765 mm
Seat Run-Out	0.002" max.	0.051 mm

Intake Valve - 30 Degree

Tappet Clearance	0.015"	0.381 mm
Face Angle	29 Degrees	29 Degrees
Face Run-Out	0.002" max.	0.051 mm
OD of Stem	0.402 to 0.403"	10.211 to 10.236 mm
Minimum Service Limit	0.4018"	10.2057 mm
OD of Head	1.995 to 2.005"	50.673 to 50.927 mm
Length	6.4195 to 6.4405"	163.0553 to 163.5887 mm
Seat Angle	30 Degrees	30 Degrees
Seat Contact Width	0.075 to 0.1000"	1.905 to 2.540 mm
Seat Run-Out	0.002" max.	0.051 mm max.
Insert Height (If Equipped)	0.2660 to 0.2670	6.7564 to 6.7818 mm
OD of Insert (If Equipped)	2.099 to 2.100"	53.315 to 53.340 mm
ID of Insert (If Equipped)	1.777 to 1.787"	45.136 to 45.390 mm

Intake and Exhaust Valve Guides

	U.S. Value	Metric Value
Length	3.219"	81.763 mm
OD of Guide	0.7510 to 0.7515"	19.075 to 19.088 mm
ID of Guide (Installed and Reamed)	0.4045 to 0.4055"	10.2743 to 10.2997 mm
Maximum Service Limit	0.4065"	10.3251 mm
Protrusion Above Cylinder Head	0.953"	24.206 mm

Valve Spring

Free Length	2.18"	55.372 mm
Number of Coils	7-1/4	7-1/4
Wire Diameter	0.192"	4.877 mm
Compress Spring to 1.484" (37.694 mm), Valve Open	153 to 167 lbs.	681 to 743 N
Compress Spring to 1.937" (49.200 mm), Valve Closed	50.5 to 60.5 lbs.	225 to 269 N

Rocker Arm Assembly

OD of Shaft	0.860 to 0.866"	21.844 to 21.996 mm
ID of Arm Bore	0.8745 to 0.8755"	22.2123 to 22.2377 mm
Shaft Assembly Lateral Movement (Both Ends)	0.010" to 0.030"	0.254 to 0.762 mm
Shaft Spring		
Number of Working Coils	4	4
Wire Diameter	0.080"	2.032 mm
Compress Spring to 1.562" (39.675 mm)	8.5 to 11.5 lbs.	38 to 51 N
Lubrication	Engine Oil, Camshaft Metering	
Shaft Oil Holes	Toward Valve Side of Engine	
	Shaft Can Not Be Turned	

Intake Valve Timing

Valve Timing	With the Number One Intake Valve to Rocker Arm Clearance Set at 0.015" (0.381 mm) and the Dial Indicator on the Number One Valve Retainer, 0.053" (1.346 mm) Movement of the Valve From the Seat (Clockwise Pulley Rotation) Will Give 7 Degrees After Top Center Timing Indication on the Crank Pulley.
--------------------	--

Section 2001

ENGINE DIAGNOSIS

GENERAL INFORMATION

Before making any repairs or adjustments on an engine, a mechanic or technician must properly diagnose the trouble.

Locating the trouble and repairing it is only part of the job, a technician must find and eliminate the cause of the trouble as well. Too many repairs are made with no thought to removing the causes that made the repair necessary.

For any engine to start or perform properly, three main requirements must be present.

1. FUEL
2. COMPRESSION
3. IGNITION

When any of these requirements are not present or limited by some mechanical reason the engine will not start or fails to operate properly throughout the power range.

1. FUEL. Fuel system problems can be present anywhere from the fuel tank, through the filters and injection pump as well as the injectors. Correct injection pump timing is important in the overall fuel system performance.

2. COMPRESSION. Compression on an engine is related to the "breathing function".


Proper compression is affected by the air cleaner condition, muffler restriction, valve condition and operation including proper valve adjustment, cylinder head gaskets condition of sleeves, rings, pistons, camshaft, and camshaft timing.

3. IGNITION. Ignition is the result of adequate compression to develop enough heat in the air charge on the compression stroke to fire the fuel being injected into the engine cylinders. Proper spray pattern and atomization of the fuel by the injector is very important. Timing the fuel injection pump to the engine to a precise degree BTDC is a vital requirement for proper ignition.


The engine diagnosis contained in the following pages covers many trouble symptoms, the causes, and what will be necessary to repair or eliminate the problem. Under each symptom are listed the most common and re-occurring problems progressively to the not so common problems. Locate your problem symptom in the diagnosis chart and refer to the pages listed for the probable causes and remedies.

INSTALLATION INSTRUCTIONS FOR M20614 TEFLON VALVE SEAL KIT


Special Tools Required



M20624 SEAL INSTALLATION TOOL




M20617 VALVE GUIDE CUTTING TOOL



VALVE SPRING COMPRESSOR


NOTE: FOUR CYLINDER ENGINES REQUIRE TWO M20614 KITS AND SIX CYLINDER ENGINES REQUIRE THREE M20614 KITS.

STEP 1

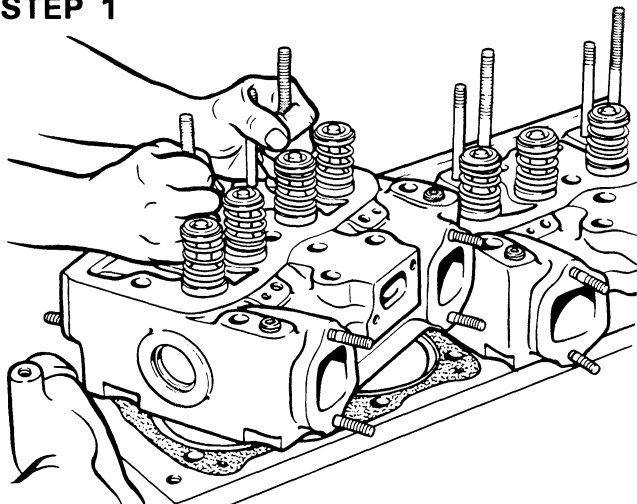


REMOVE THE CYLINDER HEADS FROM THE ENGINE, REFER TO SECTION 2015 FOR HEAD REMOVAL.

STEP 2

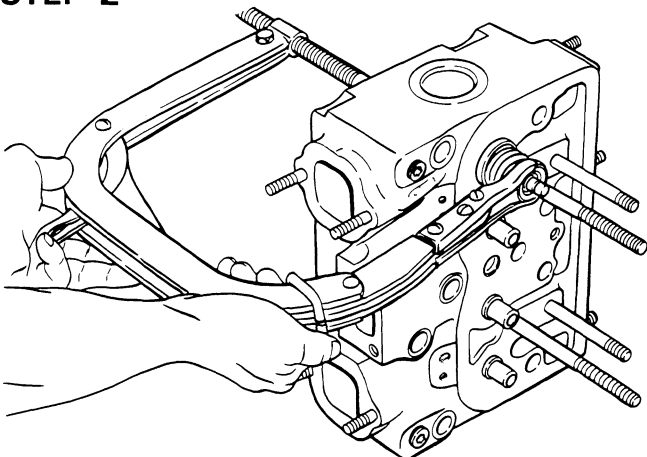

INSTALL A VALVE SPRING COMPRESSOR.


STEP 3

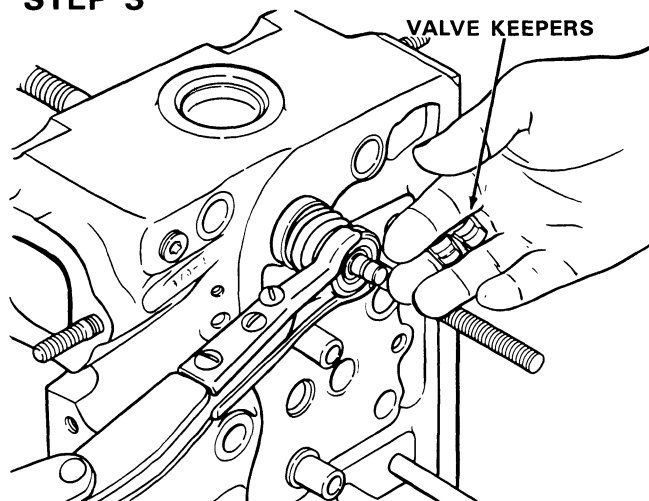

COMPRESS VALVE SPRING AND REMOVE VALVE KEEPERS.


IMPORTANT: VALVES, VALVE RETAINERS OR ROTATORS AND VALVE KEEPERS SHOULD BE MARKED WHEN REMOVED, TO INSURE THAT THEY WILL BE REINSTALLED IN THEIR ORIGINAL LOCATION.

STEP 4

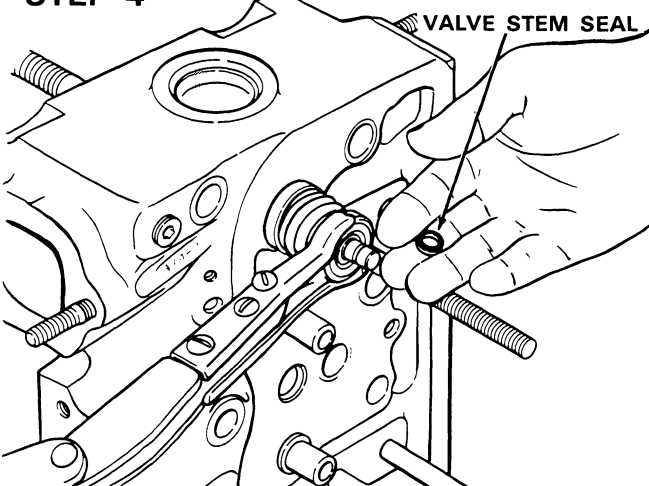


REMOVE VALVE STEM SEAL.

STEP 5

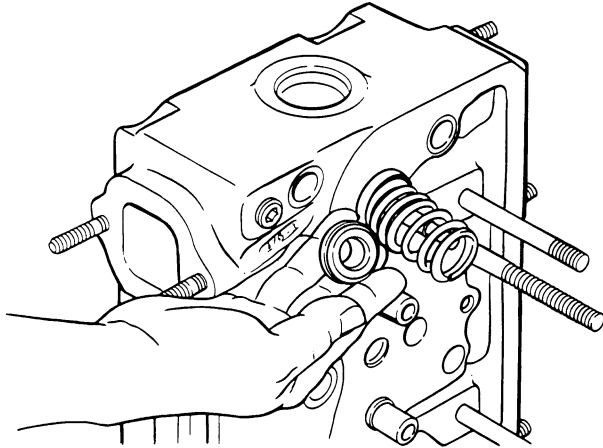

REMOVE VALVE ROTATORS OR SPRING RETAINERS, SPRINGS, SPRING SEATS AND VALVES.

STEP 6

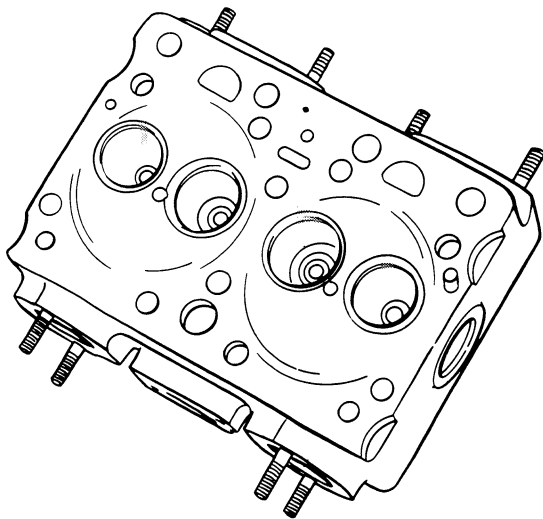



CLEAN CYLINDER HEAD COMPLETELY, REMOVING ALL TRACES OF CARBON AND OTHER DEPOSITS.

STEP 7




CLEAN VALVES WITH A FINE POWER DRIVEN WIRE BRUSH, REMOVING ALL CARBON AND VARNISH DEPOSITS. BE CAREFUL NOT TO SCRATCH VALVE STEMS.

STEP 8

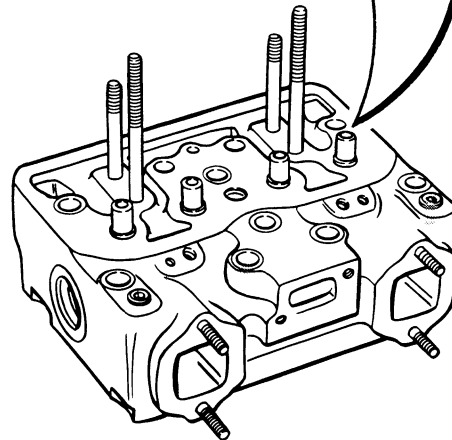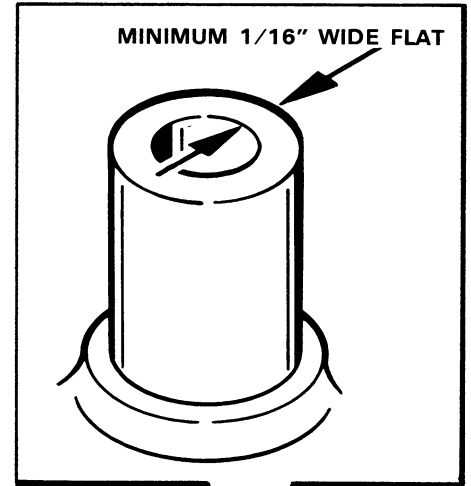


CHECK VALVE GUIDE TOP SURFACE, THERE MUST BE A MINIMUM OF A 1/16" WIDE FLAT AROUND ENTIRE TOP SURFACE.

STEP 9

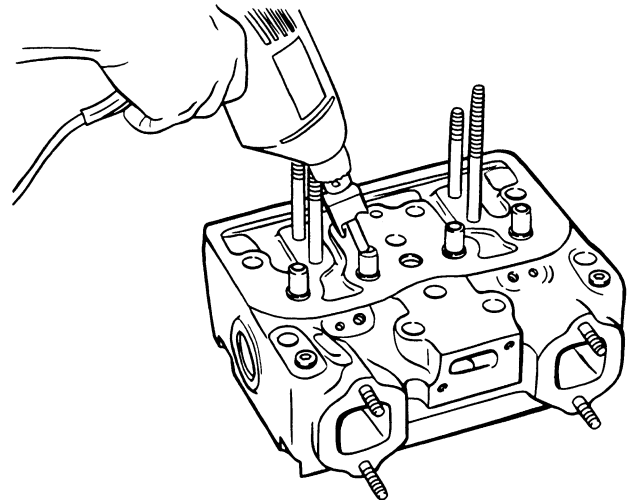


USE M20617 TOOL IN A ELECTRIC DRILL (IF REQUIRED) TO PROVIDE NECESSARY FLAT AREA ON VALVE GUIDE. IMPORTANT: DO NOT EXCEED 450 RPM WHEN DRILLING

STEP 10

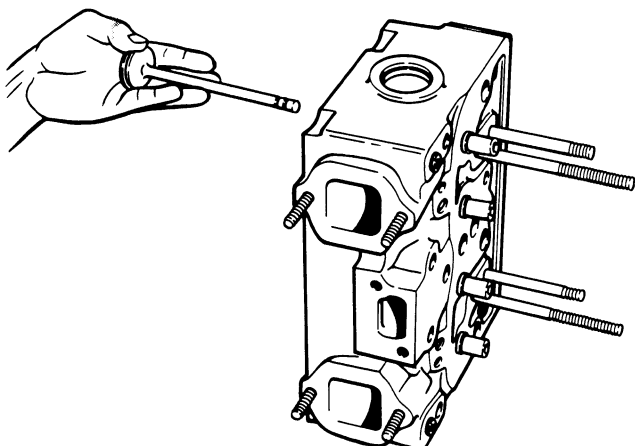


LUBRICATE VALVES WITH CLEAN ENGINE OIL BEFORE REINSTALLING INTO CYLINDER HEAD.

STEP 11

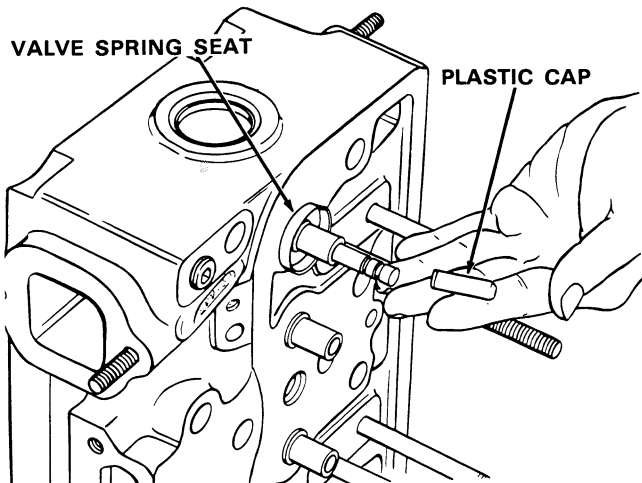


PLACE PLASTIC INSTALLATION CAP, PROVIDED IN KIT, ON THE END OF THE VALVE STEM. NOTE: CAP PREVENTS SHARP EDGES ON VALVE STEM GROOVES FROM CUTTING VALVE SEAL.

STEP 12

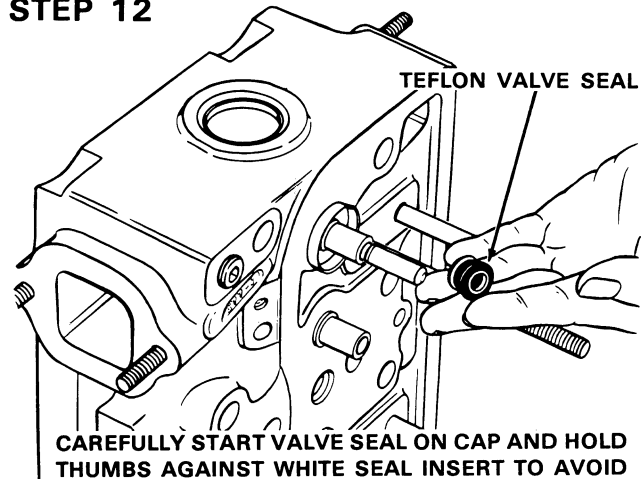



CAREFULLY START VALVE SEAL ON CAP AND HOLD THUMBS AGAINST WHITE SEAL INSERT TO AVOID DISLODGING IT, PUSH SEAL DOWN UNTIL SEAL JACKET TOUCHES TOP OF VALVE GUIDE. REMOVE INSTALLATION CAP AND SAVE, SINCE IT MUST BE REUSED.

STEP 13

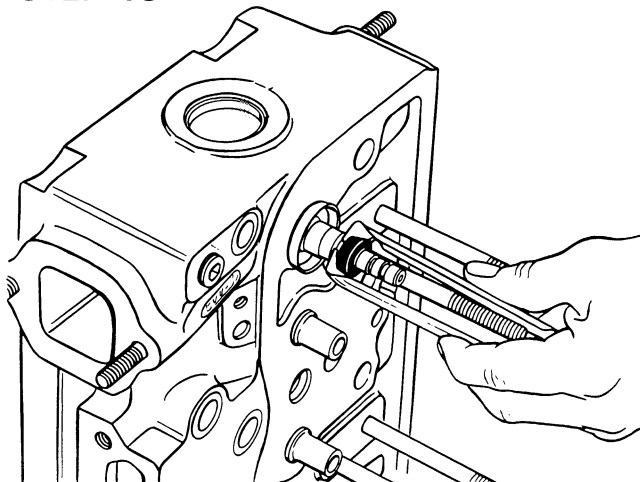


USE M20624 TOOL AND PRESS SEAL DOWN OVER VALVE GUIDE UNTIL SEAL IS FLUSH WITH TOP OF GUIDE.


STEP 14

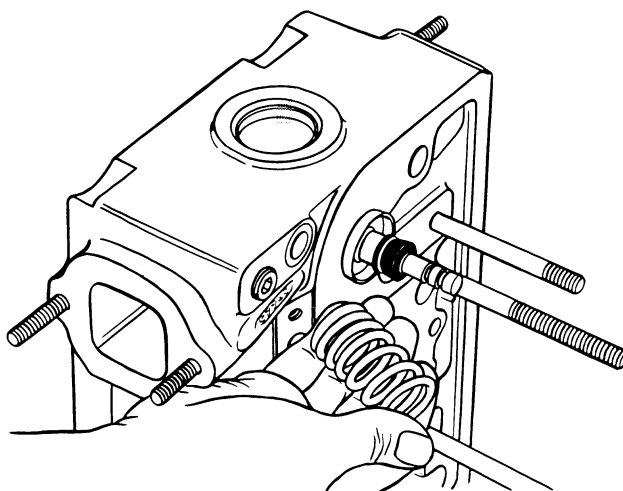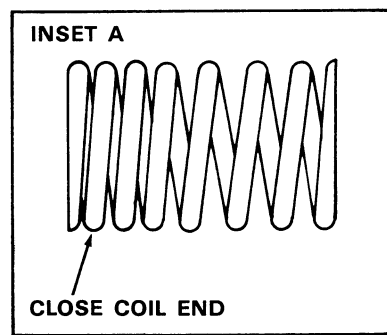


INSTALL THE VALVE SPRING. IMPORTANT: THE CLOSE COIL END OF THE SPRING MUST BE INSTALLED TOWARDS THE CYLINDER HEAD, SEE INSET A.

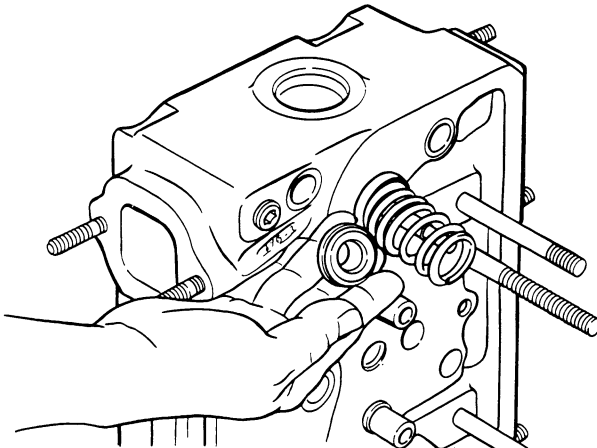STEP 15


INSTALL VALVE ROTATORS OR SPRING RETAINERS. IMPORTANT: ASSEMBLE VALVE ROTATORS WITH THEIR ORIGINAL VALVES SINCE THEY TEND TO WEAR IN AS A MATCHED SET.

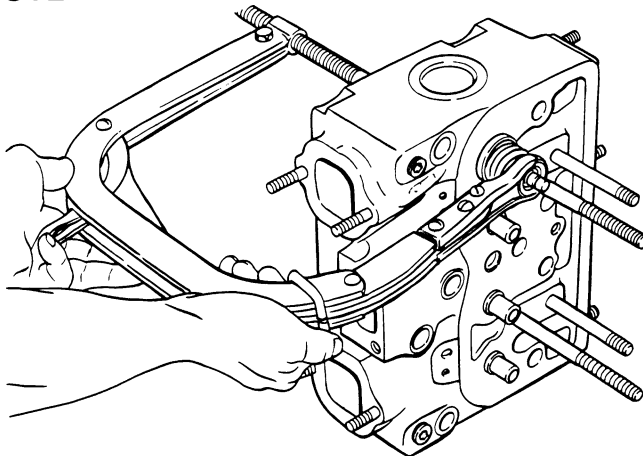STEP 16


INSTALL VALVE SPRING COMPRESSOR.

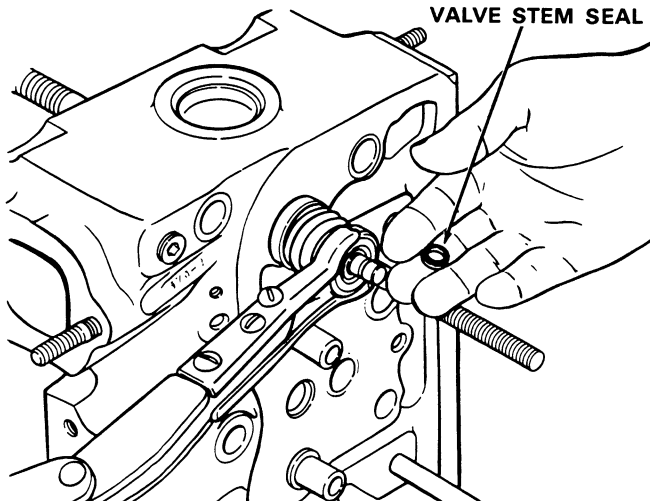STEP 17


INSTALL STEM SEAL IN LOWER VALVE STEM GROOVE.

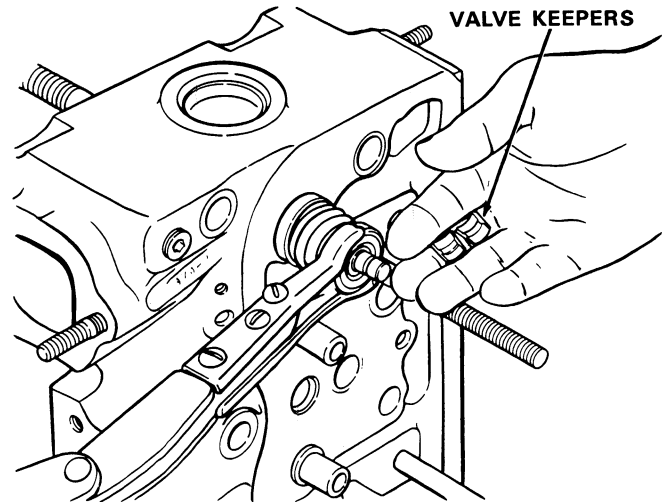STEP 18

INSTALL VALVE KEEPERS IN OUTER VALVE STEM GROOVE.

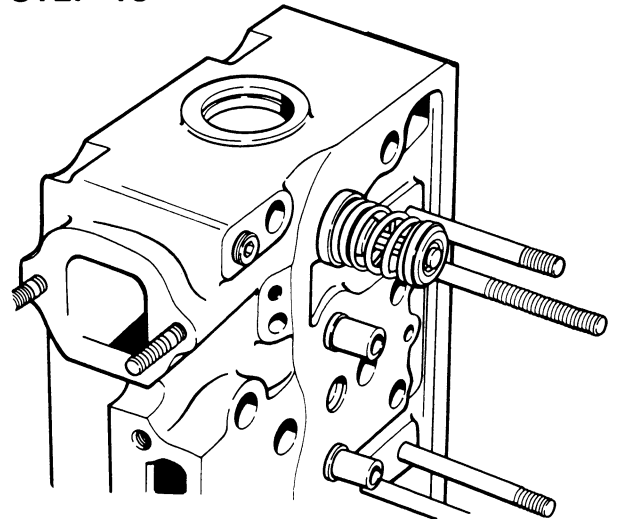
STEP 19

REMOVE SPRING COMPRESSOR AND TAP VALVE STEM END TO SEAT KEEPERS.

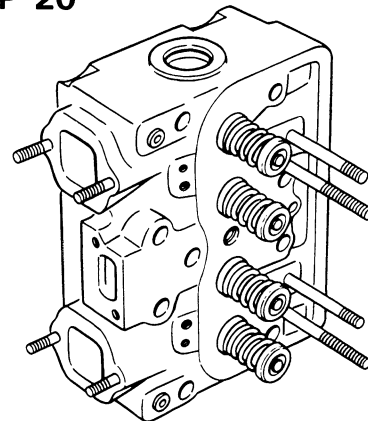STEP 20

INSTALL TEFLON SEALS ON THE OTHER INTAKE AND EXHAUST VALVES, FOLLOWING THE PRECEDING PROCEDURE.

STEP 21

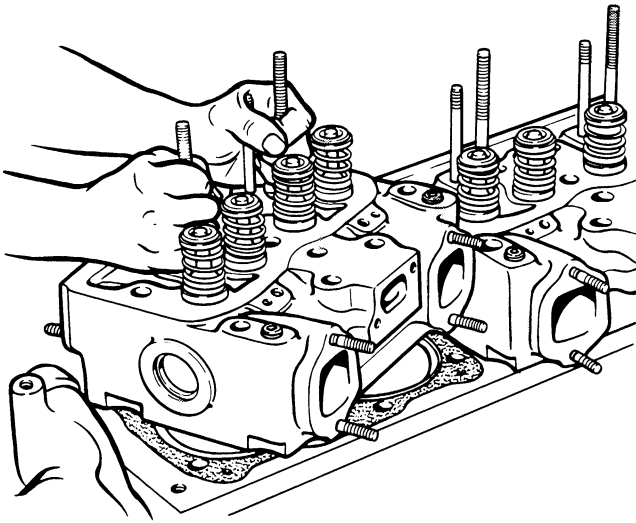

REINSTALL CYLINDER HEAD ON ENGINE FOLLOWING PROCEDURE OUTLINED IN SECTION 2015.

NOTE: The CASE CORPORATION reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

Section 2002

ENGINE TUNE-UP

ENGINE TUNEUP


A COMPLETE ENGINE TUNEUP INCLUDES THE PERFORMING OF THE FOLLOWING ITEMS:

Air Intake System - Cleaning	Page 19
Compression Check	Pages 14-17
Crankshaft Damper Pulley - Check	Page 4
Fan Belts - Adjusting	Page 20
Fuel Line Screen and Filters - Cleaning	Page 17
Injection Pump - Retiming	Page 18
Nozzle Removal	Page 14
Nozzle Spray Pattern - Checking	Page 14
Speed Adjusting - Governed	Page 19
Tappets - Adjusting	Pages 9-13
Cold Setting	Pages 9,10
Hot Setting With Engine Stopped	Pages 11, 12
Tools Required For Tuneup	Page 3
Top Dead Center - Checking	Pages 5-8
Valve Timing - Check	Page 21




THIS SAFETY ALERT SYMBOL INDICATES IMPORTANT SAFETY MESSAGES IN THIS MANUAL. WHEN YOU SEE THIS SYMBOL, CAREFULLY READ THE MESSAGE THAT FOLLOWS AND BE ALERT TO THE POSSIBILITY OF PERSONAL INJURY.

SPECIAL TOOLS

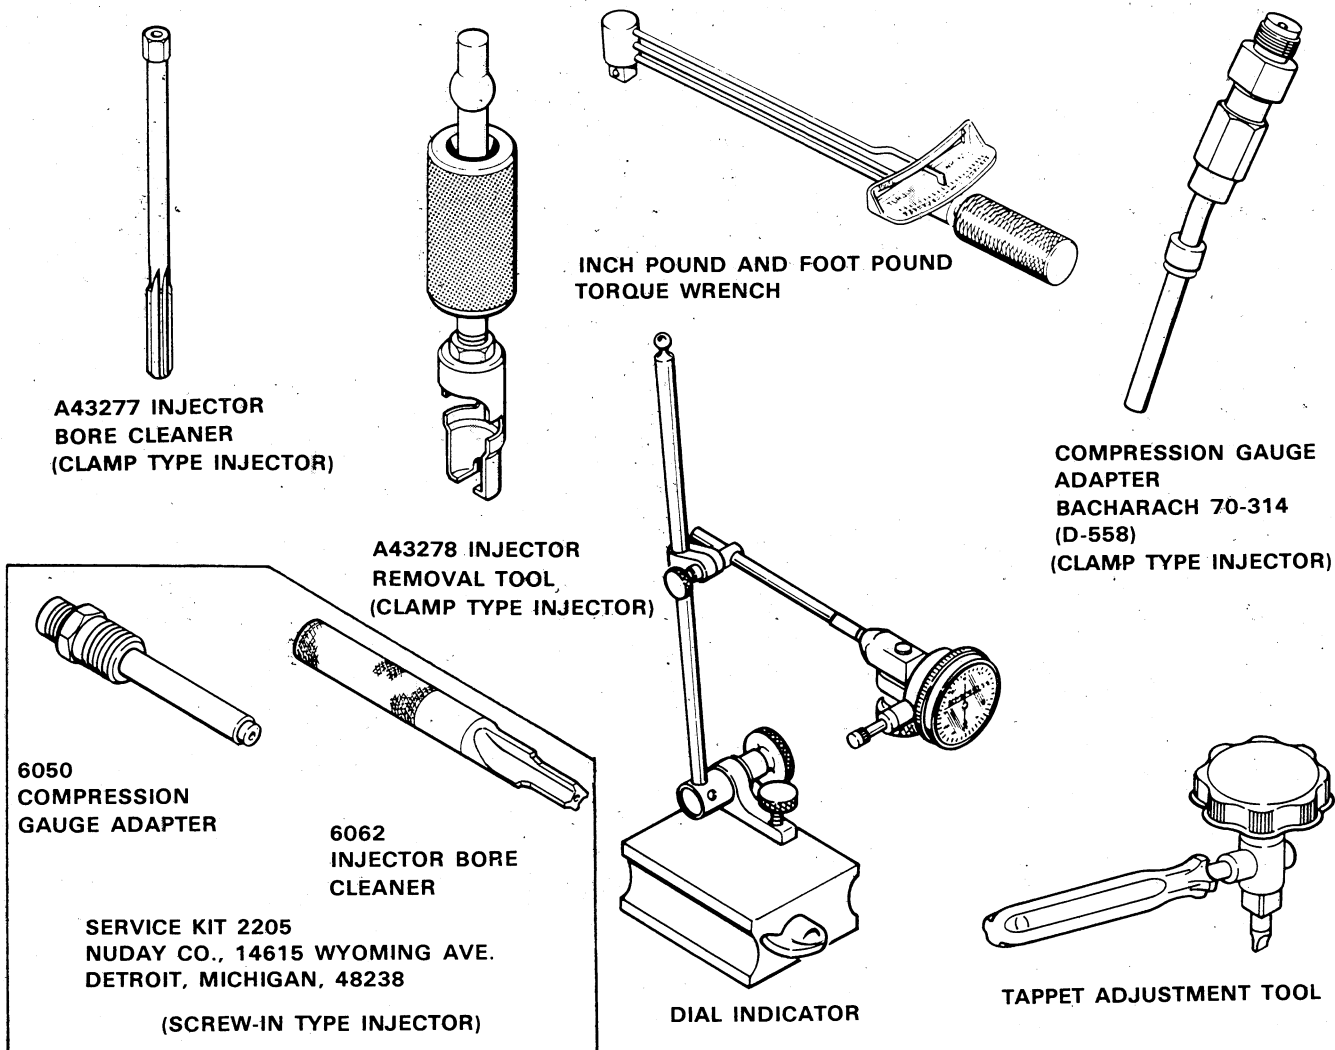

SPECIFICATIONS FOR TOOLS WHICH MUST BE MADE

Valve Spring Compressor Tool

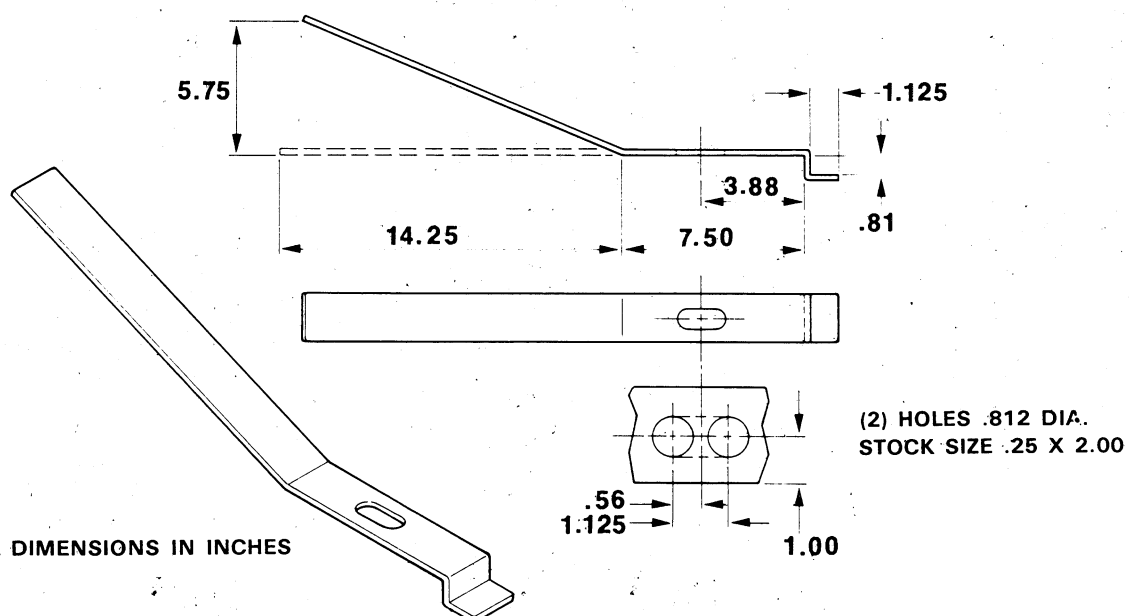



ENGINE TUNEUP PROCEDURE

Checking Crankshaft Damper Pulley



STEP 1

THE RECOMMENDED CHANGE INTERVAL FOR THE CRANKSHAFT DAMPER PULLEY IS 2000 HOURS MAXIMUM. AT ANY TIME OVER 1500 HOURS. CONSIDER CHANGING PULLEY AT ANY MAJOR ENGINE OVERHAUL OR TUNE UP.

EVERY 500 HOURS AND AT ENGINE TUNEUP, VISUALLY INSPECT RUBBER ELEMENT FOR PEEL AREAS OR RUBBER MISSING. CHECK ALIGNMENT OF THE "V" MARKS BETWEEN THE INNER AND OUTER MEMBERS. IF "V" MARKS SHIFT, ENGINE TIMING WILL BE OFF AND DAMPER PULLEY MUST BE REPLACED.

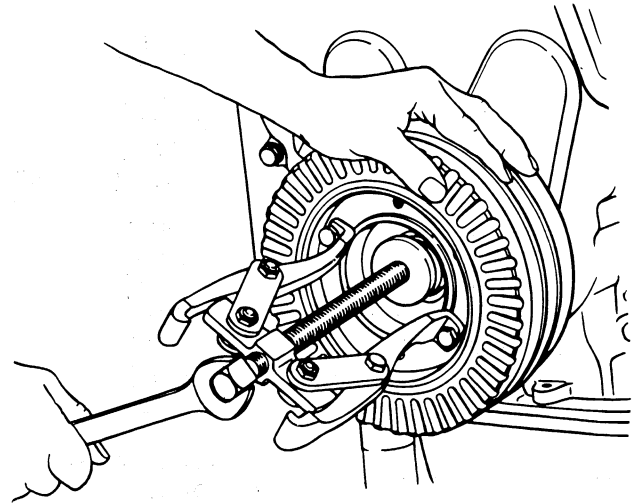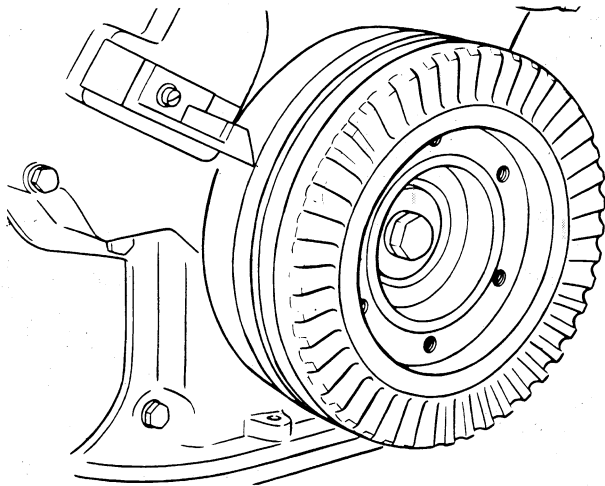


USE BOLT ON TYPE PULLER TO REMOVE PULLEY. REMOVE VISCOUS DAMPER FROM PULLEY (IF SO EQUIPPED). DO NOT PULL OR HAMMER ON OUTSIDE OF PULLEY OR VISCOUS DAMPER; SERIOUS DAMAGE TO PULLEY, DAMPER, AND RUBBER SLEEVE COULD RESULT.

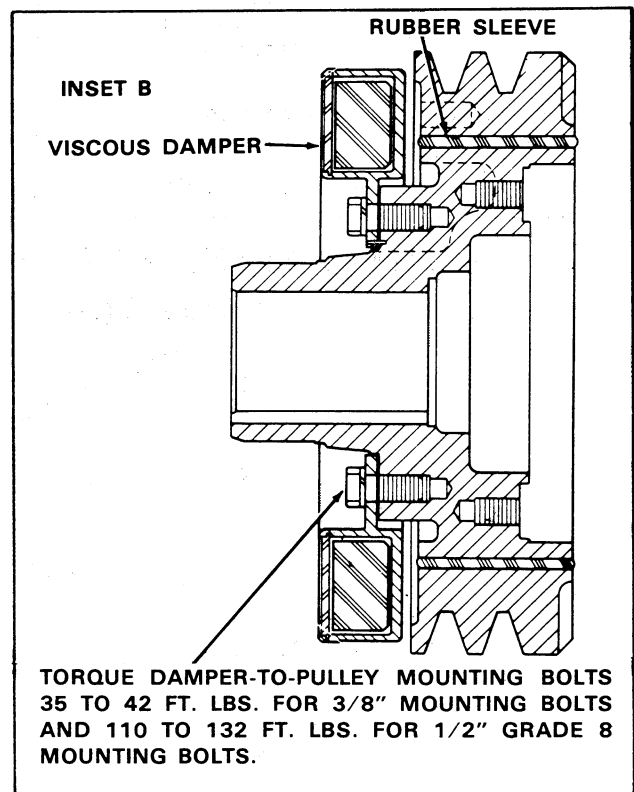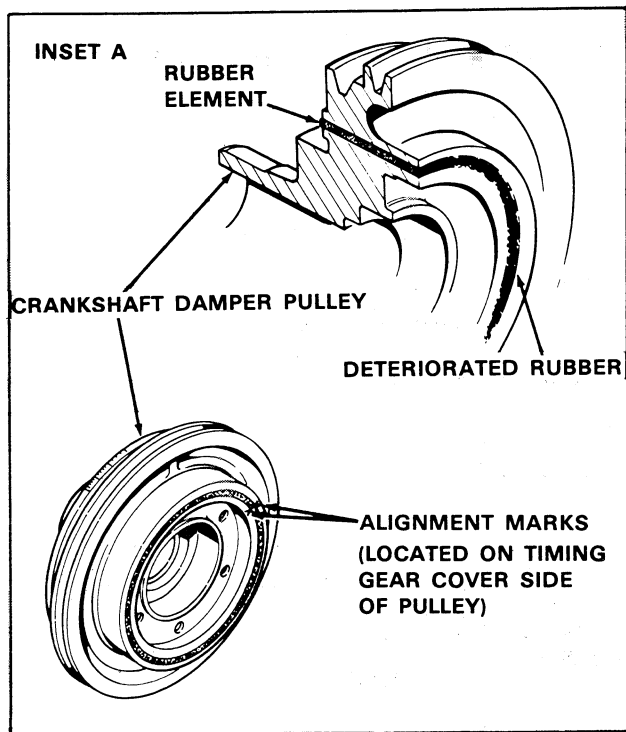


Checking Top Dead Center

STEP 2

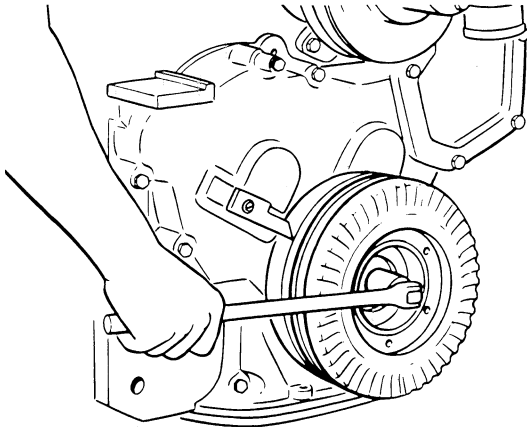


CRANK ENGINE UNTIL 10° BTDC MARK ON CRANK-SHAFT PULLEY IS ALIGNED WITH TIMING POINTER.

STEP 3

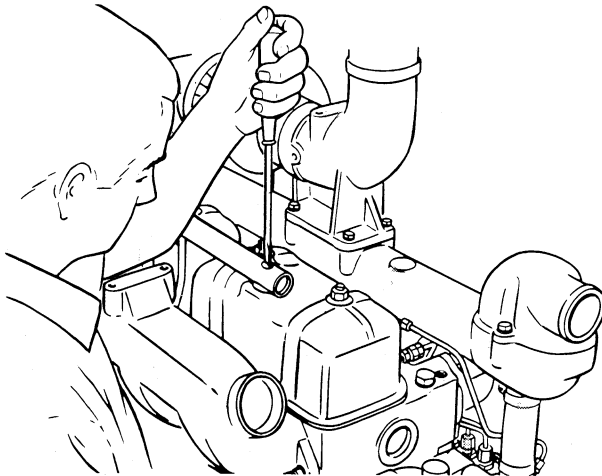


REMOVE BREATHER TUBE.

STEP 4

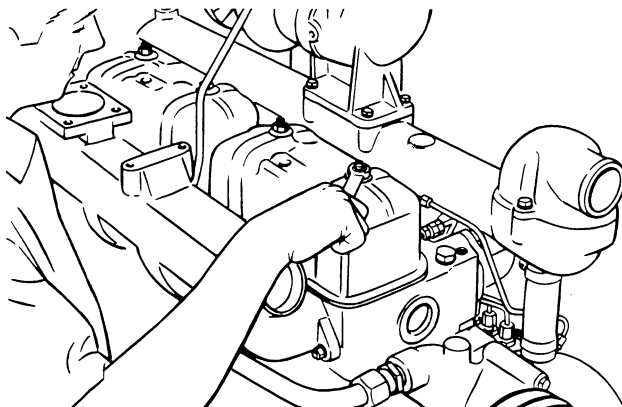


REMOVE VALVE COVER AND GASKET FROM NO. 1 AND NO. 2 CYLINDERS.

STEP 5

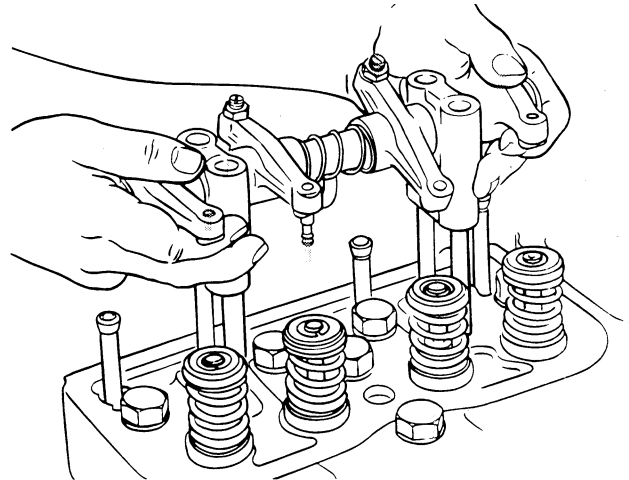


REMOVE ROCKER ARM ASSEMBLY.

STEP 6

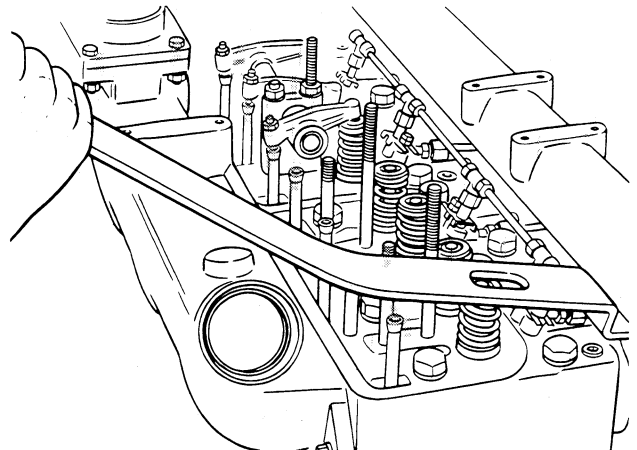


COMPRESS EXHAUST VALVE SPRING ON NO. 1 CYLINDER USING FABRICATED TOOL (SEE PAGE 3).

STEP 7

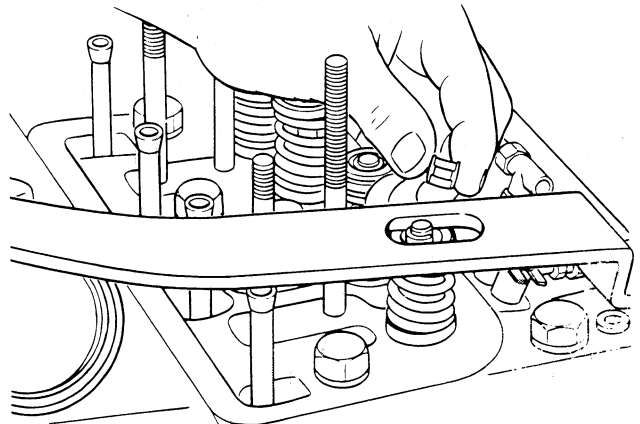


REMOVE VALVE KEEPERS

STEP 8

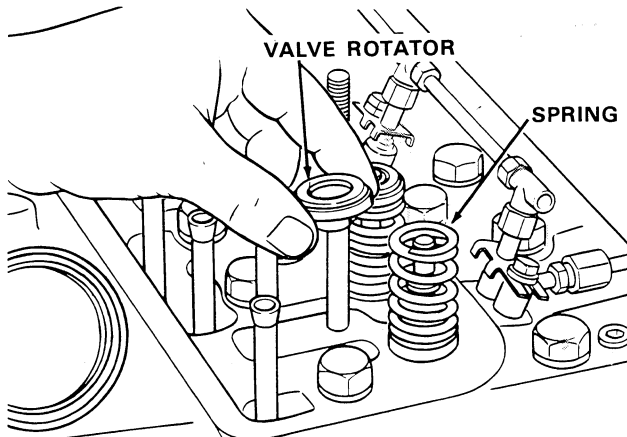


REMOVE VALVE ROTATOR, SPRING AND SEAT.

STEP 9

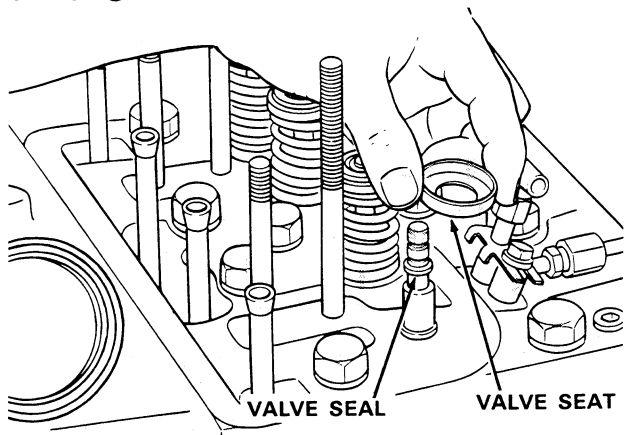


KEEP VALVE SEAL IN PLACE TO PREVENT VALVE FROM FALLING THROUGH VALVE GUIDE IF PISTON IS MOVED TOO FAR


STEP 10

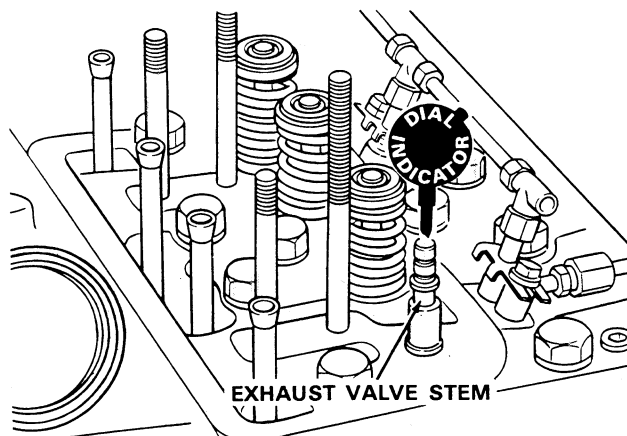

INSTALL DIAL INDICATOR ON END OF VALVE STEM WITH VALVE RESTING ON TOP OF PISTON.

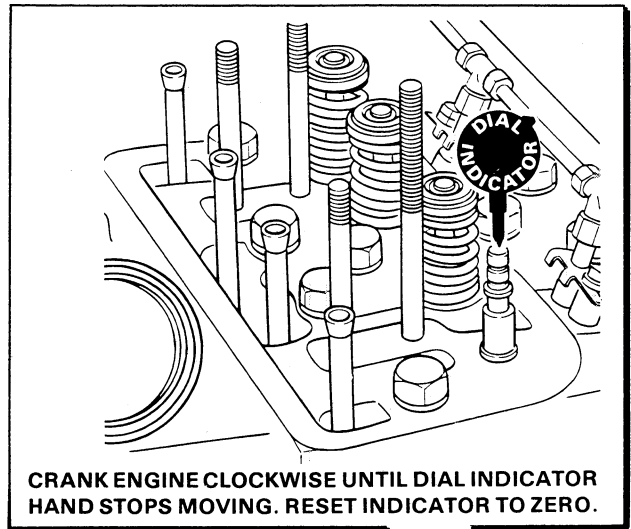

CRANK ENGINE CLOCKWISE UNTIL DIAL INDICATOR HAND STOPS MOVING. RESET INDICATOR TO ZERO.

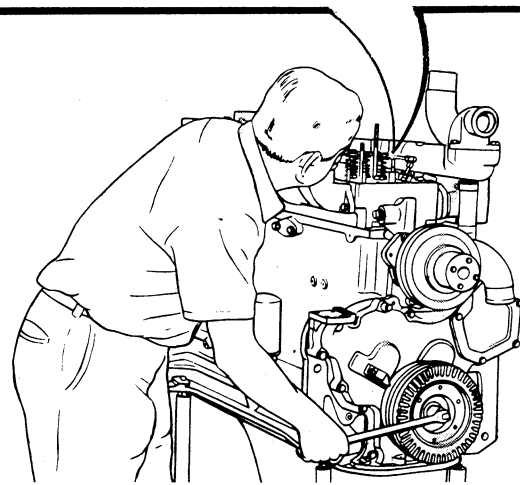

CRANK ENGINE CLOCKWISE UNTIL .010" SHOWS ON DIAL. SCRIBE A MARK ON CRANKSHAFT PULLEY IN LINE WITH TIMING POINTER.

CRANK ENGINE COUNTERCLOCKWISE PAST ZERO MARK ON INDICATOR UNTIL .010" SHOWS ON DIAL. AGAIN, SCRIBE MARK ON CRANKSHAFT PULLEY.




Suggest:



If the above button click is invalid.

Please download this document first, and then click the above link to download the complete manual.


Thank you so much for reading

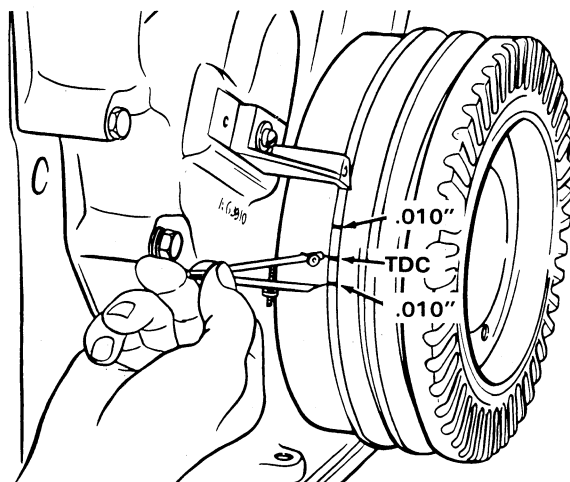STEP 11


HALF THE DISTANCE BETWEEN THESE TWO SCRIBE MARKS ON CRANKSHAFT PULLEY WILL BE THE TOP DEAD CENTER (TDC) MARK. IF THE SCRIBE MARKS ARE NOT THE SAME AS ORIGINAL MARKS ON PULLEY CHECK DAMPER.

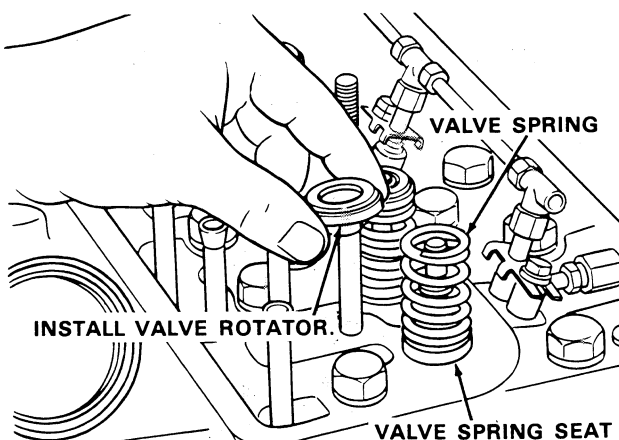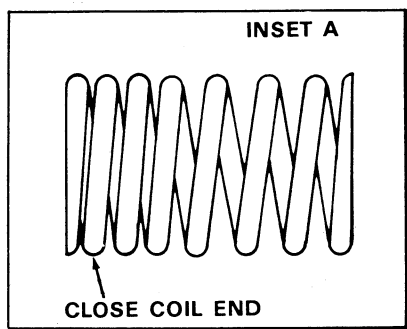STEP 12


INSTALL SPRING SEAT AND VALVE SPRING. **NOTE:** IF EQUIPPED WITH VALVE SPRING HAVING ONLY ONE CLOSE COIL END, PLACE THIS END TOWARD CYLINDER HEAD, SEE INSET A.

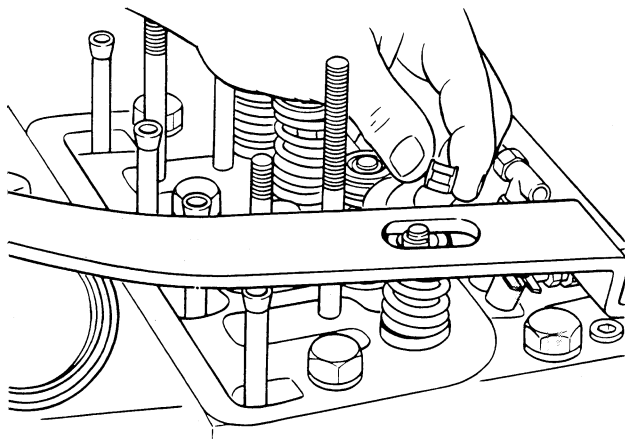STEP 13

COMPRESS VALVE SPRING USING FABRICATED TOOL. INSTALL SEAL IN LOWER VALVE STEM GROOVE. INSTALL VALVE KEEPERS IN OUTER VALVE STEM GROOVE.

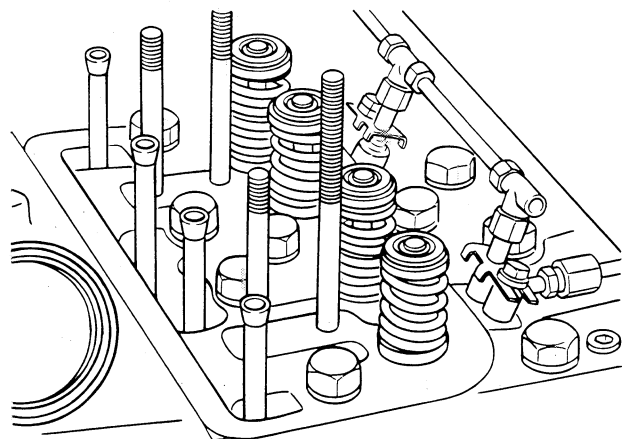STEP 14

REMOVE SPRING COMPRESSING TOOL. TAP END OF VALVE STEM TO SEAT KEEPERS.

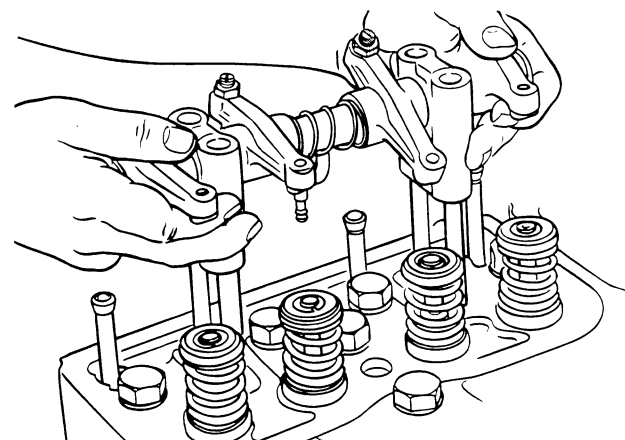STEP 15

INSTALL ROCKER ARM ASSEMBLY ONTO CYLINDER HEAD.

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>