


15 and 25 Gallon Wheeled Sprayers and 25 Gallon Portable Sprayer

(Serial No. 015001 –)

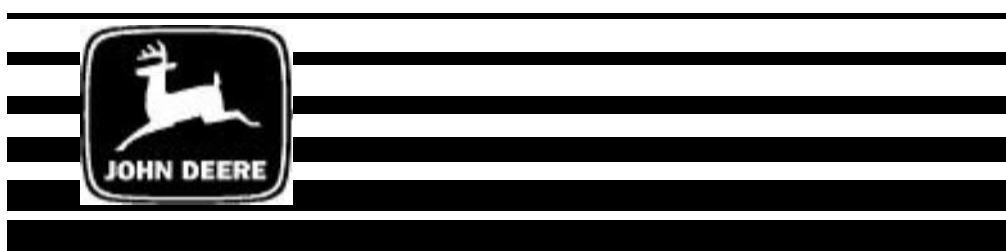

OPERATOR'S MANUAL

**John Deere
Lawn & Grounds Care Division
OMM125813 L5**

**North American Version
Litho in U.S.A
English**

INTRODUCTION

THANK YOU for purchasing a John Deere product.

Read this manual and your vehicle manual thoroughly. Failure to do so could result in personal injury or equipment damage.



This manual should be considered a permanent part of your machine and should remain with the machine when you sell it.

Measurements in this manual are metric units and their U.S. customary equivalents. RIGHT-HAND and LEFT-HAND sides are determined by facing in the direction the machine will travel when going forward. When you see a broken line arrow (➤) it indicates the part it is pointing to is hidden.

Product warranty is provided as part of John Deere's support program for customers who operate and maintain their equipment as described in this manual. The product warranty is explained on the warranty certificate you received from your dealer.

Record identification numbers below. Be sure to record all the numbers to help in tracing the machine if it is stolen. You also need to give these numbers to your dealer when you order parts.


Date of Purchase:

Dealer Name:

Phone:

Serial Number:

----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

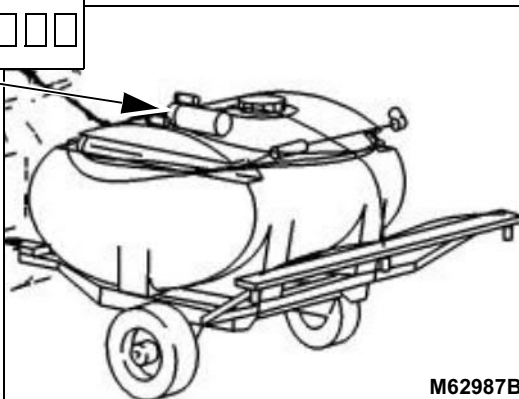

M62987B

TABLE OF CONTENTS

	Page
Safety Signs	
Safety-Alert Symbol	1
Machine Safety Labels	1
Preparing the Vehicle	
Tractor Requirements (15 and 25 Gallon Wheeled Sprayers)	2
Vehicle Requirements (25 Gallon Portable Sprayer)	2
Installing	
Park Vehicle Safely	3
Attach Sprayer to Tractor	3
Route Wiring Harness – Units Equipped With Mid Battery	4
Route Wiring Harness – Units Equipped With Front Battery	5
Route Wires to Front Battery – Units So Equipped	6
Removing	
Park Vehicle Safely	7
Removing Sprayer	7
Operating	
SAFETY:	
Operate Safely	9
Wear Appropriate Clothing	10
Use Chemicals Safely	10
Dispose of Chemicals Safely	11
Lifting Portable Sprayer Safely	11
Transporting Portable Sprayer Safely	11
Transporting Wheeled Sprayer Safely	12
Spraying Tips	12

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>

TABLE OF CONTENTS

	Page
General Spraying Information	13
Adjusting Tip Height and Width.....	14
Starting and Stopping Sprayer.....	14
Using Handgun and Boom Nozzles	15
Adjusting Pump.....	17
Replacement Parts	
Parts Available	18
Service Machine Safely	
Practice Safe Maintenance	19
Wear Appropriate Clothing.....	20
Service	
Greasing Wheels.....	21
Checking Tire Pressure.....	21
Cleaning Spray Nozzle.....	21
Cleaning Pump Filter.....	22
Changing Fuse.....	22
Troubleshooting	
Using Troubleshooting Chart	23
Storing Machine	
Store Machine Safely	25
Assembly	
Bag of Parts	26
Identify Parts (15 Gallon Sprayer).....	27
Identify Parts (Wheeled Model) (25 Gallon).....	28
Identify Parts (Portable Model).....	29

TABLE OF CONTENTS

	Page
Assemble End Plates to Tank Supports (15 Gallon Sprayer)	30
Assemble End Plates to Tank Supports (25 Gallon Sprayer)	31
Assemble Hitch Supports to End Plates and Drawbar to Hitch Supports	32
Assemble Hitch Clevis to Drawbar	33
Install Axle Mount Plates and Wheels to End Plates	33
Assemble Spray Boom Supports to Tank Supports	35
Assemble Spray Boom to Spray Boom Supports (15 Gallon Sprayer)	35
Assemble Spray Boom to Boom Supports and Spray Boom Extensions to Main Boom (25 Gallon Sprayer)	36
Assemble Sprayer Tank to Sprayer Frame	37
Install Boom Hose Assembly (15 Gallon Sprayer).....	38
Install Boom Hose Assembly (25 Gallon Sprayer).....	39

Specifications

Model 15 Gallon Wheeled Sprayer.....	40
Model 25 Gallon Sprayers (Wheeled and Portable)	41

John Deere Service Literature

Order Form	43
------------------	----

All information, illustrations and specifications in this manual are based on the latest information at the time of publication. The right is reserved to make changes at any time without notice.

COPYRIGHT© 1995
John Deere Horicon Works
All rights reserved

SAFETY SIGNS

Safety-Alert Symbol

Read and recognize safety information. Be alert to the potential for personal injury when you see this safety-alert symbol.

On your machine safety labels, the words DANGER, WARNING, and CAUTION are used with this safety-alert symbol. DANGER identifies the most serious hazards. In this manual, the word CAUTION and this symbol call attention to safety messages.



Machine Safety Labels



PREPARING THE VEHICLE

Tractor Requirements (15 and 25 Gallon Wheeled Sprayers)

Make sure tractor tire pressure is correct. (See your tractor operator's manual for the correct pressure.)

Tractor weights improve stability. Add front weights for better front-end stability and steering. See your John Deere dealer for these weights. Instructions to install will come with the weights.

Your tractor requires the following:

- 12-Volt Battery and Alternator
- Drawbar
- Wiring Harness Extension: This part is required on all tractors that have the battery located in front of the engine. Order this wiring harness from your John Deere dealer.

On tractors equipped with rear suitcase weights or grass bagging attachments: These attachments need to be removed before installing sprayer. They are not compatible with this sprayer. Bagger mounting brackets may remain installed.

Vehicle Requirements (25 Gallon Portable Sprayer)

Please read the sections on operation and spraying safety in your operator's manual. Pay particular attention to the section dealing with the 12 volt wire harness installation.

You should pay particular attention to what the sprayer will be transported with. Be sure that the unit is capable of carrying the 25 gallon portable sprayer fully loaded. When loaded it will weigh about 101 kg (222 lbs), so it is important that the unit be secured properly and that the carrying vehicle can safely carry that load.


INSTALLING

Park Vehicle Safely

- Stop vehicle on a level surface, not on a slope.
- Disengage PTO.
- Engage the park brake.
- STOP the engine.
- Remove the key.
- Before you leave the operator's seat, wait for engine and all moving parts to STOP.


Attach Sprayer to Tractor

1. Pull sprayer in line with the drawbar on the tractor.
2. Pull sprayer forward until drawbar (A) on tractor is between clevis (B) on sprayer.
3. Put tethered pin assembly (C) into hole on clevis and through drawbar.
4. Fasten with spring locking pin (D).
5. Swing boom extensions out and lock in place.
(25 Gallon Sprayer Only)

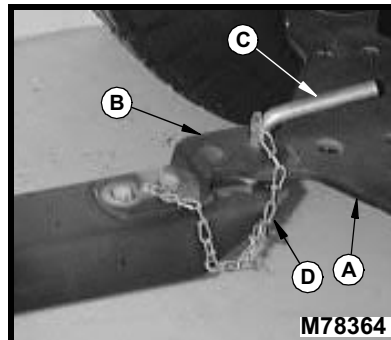

INSTALLING

Route Wiring Harness – Units Equipped with Mid Battery

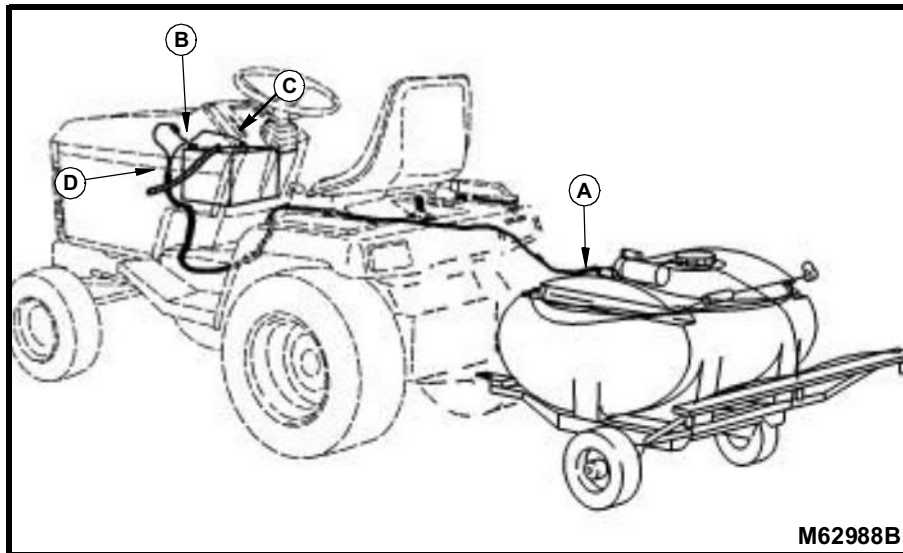

1. Connect long end from switch to pump leads (A).
2. Route harness as shown. On some units route wire on right side of fuel tank filler.


IMPORTANT: To help prevent a possible electric spark, install the red positive (+) wire to the positive battery terminal first. Then install the negative terminal.

3. Fasten red lead to positive (+) terminal (B) of battery.
4. Fasten black lead to negative (–) terminal (C) of battery.
5. Connect short end to battery leads (D) of harness.

NOTE: MAKE SURE hood does not close on wires or connectors.

INSTALLING

Route Wiring Harness – Units Equipped with Front Battery

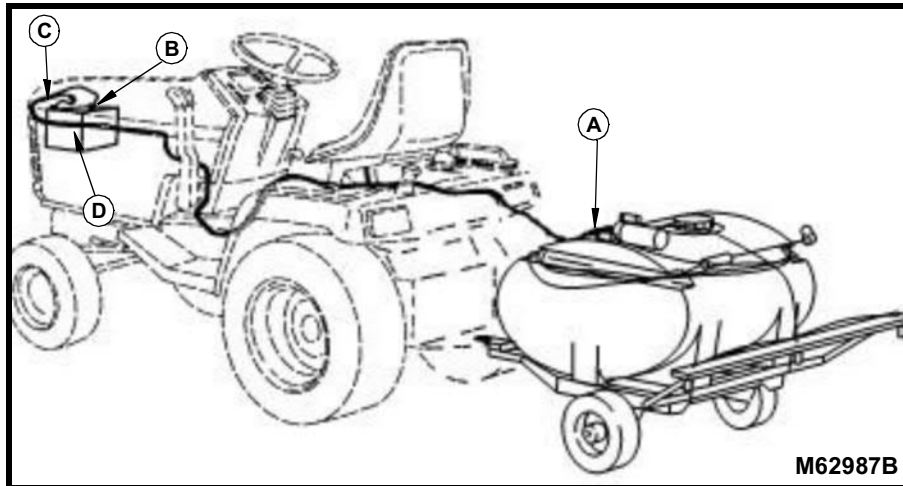

NOTE: You will need a 74 cm (29-in.) extension wire.
Purchase from your John Deere dealer.

1. Connect long end from switch to pump leads (A).
2. Route wire on right side of fuel tank filler.

IMPORTANT: To help prevent a possible electric spark, install the red positive (+) wire to the positive battery terminal first. Then install the negative terminal.

3. Fasten red lead to positive (+) terminal (B) of battery.
4. Fasten black lead to negative (-) terminal (C) of battery.
5. Connect extension (D), not furnished; to short end from switch. Then route extension under forward hood rod and connect it to battery leads.


NOTE: MAKE SURE hood does not close on wires or connectors.

INSTALLING

Route Wires to Front Battery – Units So Equipped

1. Route main wire under forward hood rod (A).
2. Route red lead inside red rubber terminal cover (B).

NOTE: MAKE SURE hood does not close on wires or connectors.

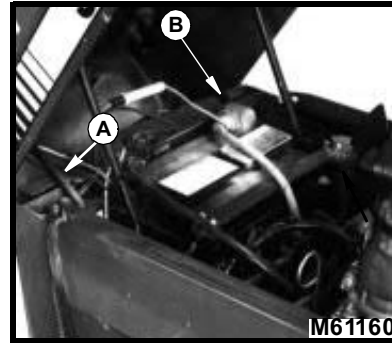


REMOVING

Park Vehicle Safely


- Stop vehicle on a level surface, not on a slope.
- Disengage PTO.
- Engage the park brake.
- STOP the engine.
- Remove the key.
- Before you leave the operator's seat, wait for engine and all moving parts to STOP.

Removing Sprayer

1. Empty the tank.
2. Flush the tank.

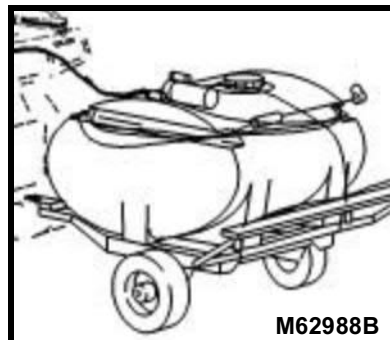

3. Disconnect wire harness (A) from battery leads. Roll harness and store with tank.

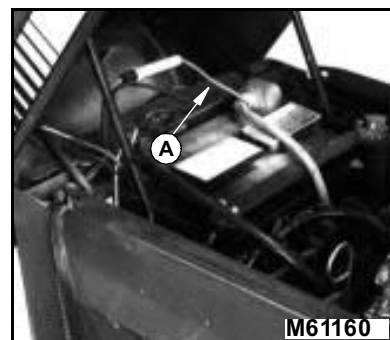

REMOVING


4. Fold in boom extensions,
(25 Gallon Sprayer Only).



5. Pull spring locking pin (B) out of
hitch pin and remove hitch pin (C).

6. Pull sprayer back from tractor.

7. Put hitch pin in sprayer hitch for
storage.

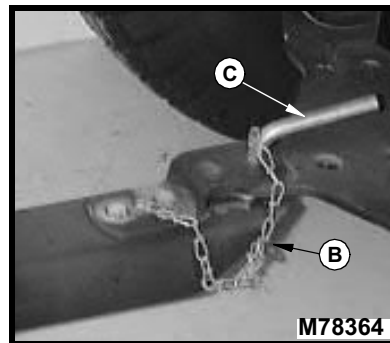

OPERATING

SAFETY

Operate Safely



- Check vehicle brake action before you operate. Adjust or service brakes as necessary.
- Inspect machine before you operate. Be sure hardware is tight. Repair or replace damaged, badly worn, or missing parts. Be sure guards and shields are in good condition and fastened in place. Make any necessary adjustments before you operate.
- Make repairs before you operate. Keep machine properly maintained and in good working order.
- Keep children away from spraying area.
- DO NOT leave machine unattended when it is running.
- Only operate during daylight or with good artificial light.
- DO NOT let anyone, especially children, ride on sprayer or vehicle.
- DO NOT let children or untrained person operate machine.
- Do not direct spray toward bystanders or allow anyone near sprayer while in operation.
- If spray comes in contact with your body, immediately follow directions on chemical container pertaining to spray material.
- Do not spray during extreme heat or windy weather.
- Do not put nozzle tip or other parts to your lips to blow out dirt.
- Do not wear radio or music headphones while operating the machine. Safe operation requires your full attention.



Suggest:

If the above button click is invalid.

Please download this document first, and then click the above link to download the complete manual.

Thank you so much for reading

OPERATING

Wear Appropriate Clothing



- Wear close fitting clothing and safety equipment appropriate for the job.
- Loud noise can cause impairment or loss of hearing, wear a suitable protective device such as earplugs.

Use Chemicals Safely



- DO NOT use flammable liquids.
- Chemicals can be dangerous. Improper selection or use can injure persons, animals, plants, soil or other properties.
- Follow directions for each specific chemical.
- Add chemicals to water—not water to chemicals.
- Never allow the water hose that is used to fill the tank to actually reach down into the spray mix. You may “contaminate” the end of the hose.
- Your spray dealer can tell you which sprays need to be followed by a spray neutralizer material.

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>