

# OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors

## Recognizing Safety Information

---

### Recognizing Safety Information



T81389-UN: Safety-Alert Symbol

This is a safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the possibility of personal injury.

Follow recommended precautions and safe operating practices.

# OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors

## Understanding Signal Words

---

### Understanding Signal Words



TS187-19: Signal Words

Signal words DANGER, WARNING or CAUTION are used together with safety-alert symbols. DANGER means very serious injury may occur.

DANGER or WARNING symbols are placed at some specially dangerous positions. General precautions are listed under CAUTION symbols. In this manual, the word CAUTION also reminds you to pay attention to safety information.

# OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors Following Safety Instructions

---

## Following Safety Instructions



TS201-UN: Safety Information

Carefully read all safety messages in this manual and on your machine safety signs. Keep safety signs in good condition. Replace missing or damaged safety signs. Be sure new equipment components and repair parts include the current safety signs. Replacement safety signs are available from your John Deere dealer.

There can be additional safety information contained on parts and components sourced from suppliers that is not reproduced in this Operator's Manual.

Learn how to operate the machine and how to use controls properly. Never let untrained personnel to operate this machine.

Keep your machine in proper working condition. Unauthorized machine modifications may adversely affect machine functions and/or safety, as well as machine service life.

If you do not understand any part of this manual and need assistance, contact your John Deere dealer.

**<https://www.ebooklibonline.com>**

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.


**<https://www.ebooklibonline.com>**

# OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors

## Preparing for Emergencies

---

### Preparing for Emergencies

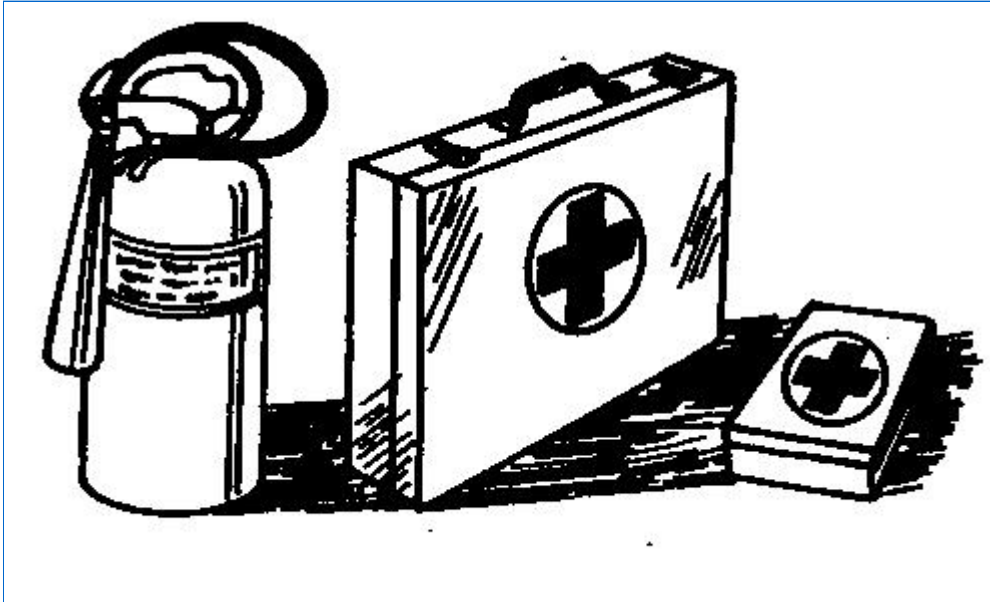

TS291-UN: First aid kit

Be prepared if a fire starts.

Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers of doctors, ambulance service, hospital, and fire department near your telephone.

Wearing Protective Clothing



TS206-UN: Protective Clothing

Wear close fitting clothing and safety equipment appropriate to the job.


Safe operation of equipment requires an operator to concentrate much. When operating the machine, do not wear radio or music headphones.

# OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors

## Protecting Against Noise

---

### Protecting Against Noise

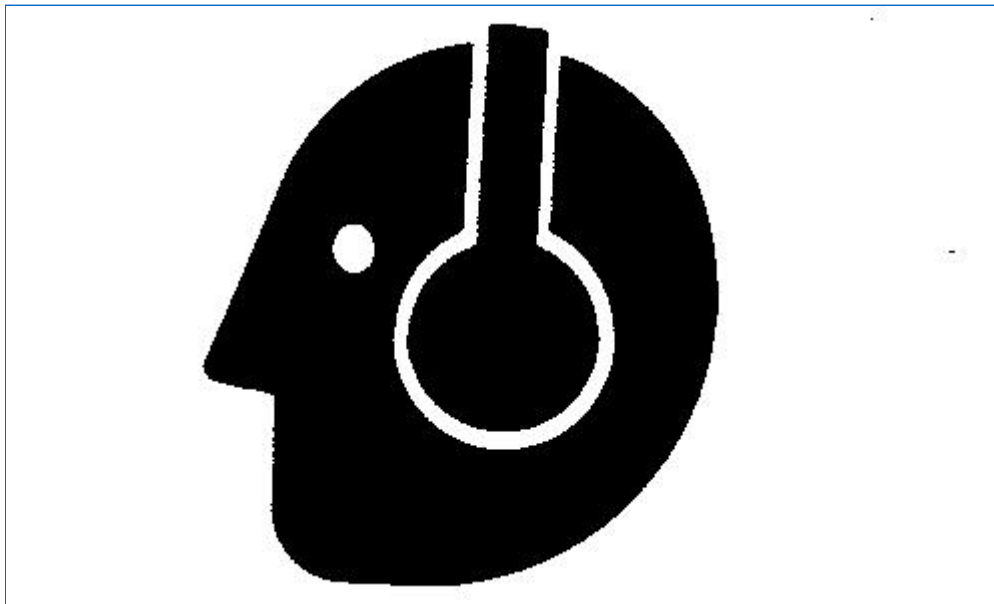

TS207-UN: Noise Exposure

Prolonged exposure to loud noise can cause impairment or loss of hearing.

Wear suitable hearing protective devices, such as earmuffs or earplugs, to protect against loud noise.

# OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors Handling Fuel Safely — Fire Prevention

---

## Handling Fuel Safely — Fire Prevention



TS202-UN: Fire Prevention

Use fuel with caution: Fuel is highly flammable. Do not refuel the machine while smoking or when being close to open flame or sparks.

Always stop engine before refueling machine. Always fill the fuel tank in an outdoor environment.

Prevent fire by keeping machine clear of accumulated dirt, grease and debris. Always wipe away spilled fuel.

Use only an approved fuel container for transporting flammable liquids.

Never refill fuel container on a pickup truck with plastic base gasket. Always place fuel container on the ground before refilling. Before removing container lid, put fuel dispenser nozzle in contact with fuel container. Keep that while filling.

Do not store fuel container where there is an open flame, spark, or pilot light such as within a water heater or other appliance.

# OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors

## Handling Starting Fluid Safely

---

### Handling Starting Fluid Safely



TS1356-UN: Storing Safely

Starting fluid is highly flammable.

When using it, keep it away from any sparks or flame. Starting fluid should be kept away from batteries and cables.

When storing high-pressure starting fluid tank, in order to avoid accidental leak, lid must be closed. Container should be stored in a cool and safe place.

Do not burn or prick starting fluid tank.



**Suggest:**

**For more complete manuals. Please go to the home page.**

**<https://www.ebooklibonline.com>**

**If the above button click is invalid. Please download this document first, and then click the above link to download the complete manual.**

**Thank you so much for reading**

# **OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors**

## **Fire Prevention**

---

### **Fire Prevention**

To reduce risk of fire, always check and clean the tractor.

- Birds or other animals may build a nest or bring other combustible materials to engine compartment or exhaust system. Daily check and clean the tractor before first use.
- Forage, crops or other debris may accumulate during normal operation. This is especially true when operating in very dry conditions or conditions where airborne crop material or crop dust is present. Any such build up must be removed to ensure proper machine function and to reduce the risk of fire. Tractor must be regularly checked and cleaned throughout the day.
- Regularly and thoroughly clean the tractor according to routine maintenance procedures in the Operator's Manual. That can greatly reduce the risk of fire and costly downtime.
- Do not store fuel container where there is an open flame, spark, or pilot light such as within a water heater or other appliance.
- Always check fuel lines, fuel tank, lids and connectors for damage, cracks or leaks. Replace as necessary.

Comply with all operation and safety procedures on the machine and in the Operator's Manual. While checking and cleaning, be alert of the hot engine and exhaust components. Before any checking or cleaning, engine must be switched off. Set gearbox in parking or apply parking brake and remove the key. Removing the key can prevent others to start the tractor while being checked and cleaned.

# OMSU37873 - Operator's Manual of 300, 304, B350 and 2C-354 Tractors In Case of Fire

---

## In Case of Fire



TS227-UN: Flames



**CAUTION:**

*Do not take risk, so as to avoid injuries. If the fire is too fierce, do not attempt to put it off.*

---

When any sign of fire is found, immediately stop the machine. Signs of fire include burning smell, smoke or flames.

If you can safely put off the fire, be sure to follow the instructions on fire extinguisher. If no instructions are found on fire extinguisher, follow the general principles below:

1. Remove fire extinguisher from bracket.
2. Approach the fire from leeward direction.
3. Pull safety pin from extinguisher.
4. Hold the fire extinguisher handle. Aim the hose at root of flame.
5. Squeeze fire extinguisher handle to eject extinguishing agent.
6. Moving nozzle back and forth, so that extinguishing agent covers the flame.

**<https://www.ebooklibonline.com>**

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

**<https://www.ebooklibonline.com>**