

Model G Series Tractors



JOHN DEERE

OPERATORS MANUAL


Model G Series
Tractors

OMR2009 Edition E9 English

OMR2009 Edition E9

LITHO IN U.S.A.
ENGLISH



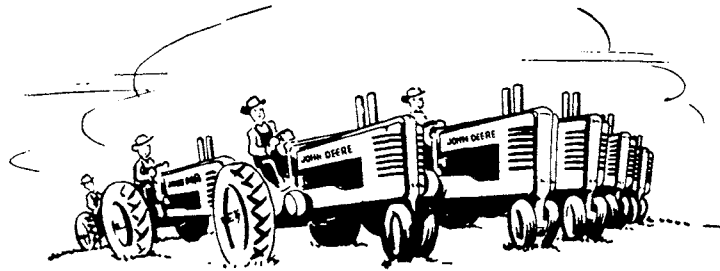

12069

Congratulations

WE welcome you to our ever-growing family of John Deere tractor owners. We are confident that the dependable and economical performance of your new tractor will prove that you made a wise choice.

Back of your tractor is an organization that has been building farm equipment for more than one hundred years. The plant in which your tractor was built is the largest single tractor plant in the world. In this modern factory, equipped with the finest precision machinery, fine materials, high-grade workmanship, thorough inspection, and complete testing are combined to give you the best in dependable tractor performance and economical tractor operation.

The way you operate your tractor and the care you give it have much to do with the service and satisfaction you will get from it. This manual has been carefully prepared and profusely illustrated to show you what to do and when to do it. It has been written by the best engineers in the John Deere tractor factory. Make it your guide. Study it carefully. Refer to it often. Only by following the suggestions it contains can you hope to get the most from your investment.

If you find that you need information not covered in this manual, or if your tractor requires special servicing, which it will periodically, take advantage of the facilities offered by your John Deere dealer. He has trained mechanics, who are kept informed on the best methods of John Deere tractor servicing and can give you prompt, "know-how" service in the field or in his shop.

When in need of parts, go to your John Deere dealer. Be sure to give him the serial number of your tractor. The illustrations, below, will show you where to find the serial numbers of your tractor, magneto or distributor, and Powr-Trol or power lift. Obtain these serial numbers from your tractor—**NOW**—and insert them in the spaces provided in the illustrations below. Also, be sure they are written on the special identification card which is included with the manual. Put it in your billfold for ready reference.

TRACTOR	DISTRIBUTOR	POWR-TROL OR POWER-LIFT
<input type="text"/>	<input type="text"/>	<input type="text"/>

• TABLE OF CONTENTS

SPECIFICATIONS AND DATA.....	4-5
CONTROLS.....	7-13
Contains information regarding Seat, Steering, Shutter and Fuel Control with Heat and Oil Gauges, Choke Lever, Engine Cranking, Brakes, Clutch, Gear Shift Lever, Power Shaft, Power Lift, and Powr-Trol.	
STARTING THE NEW TRACTOR.....	14-20
Contains information regarding Fuels, Fuel Storage, Run-In Period for the New Tractor, Before Starting the Engine, Starting the Engine, Operating the Tractor, Stopping the Tractor, and Stopping the Engine.	
LUBRICATION.....	21-30
Contains information regarding Purpose of Lubrication, Storage of Lubricants, Engine Lubrication, Transmission Lubrication, and Periodic Lubrication Service.	
SERVICE THAT WILL KEEP YOUR TRACTOR IN TIP-TOP SHAPE.....	31-57
Contains information regarding Fuel System, Ignition System, Cooling System, Clutch, Tappet Adjustment, Rear Wheel Brakes, Pulley Brake Power Lift, Powr-Trol, Front Wheels, Rear Wheels, Tire Inflation, Rubber Tire Inflation Chart, Care of Rubber Tires, Weighting Rear Wheels, Drawbar, Starting and Lighting Equipment, Storing the Tractor, and Service Suggestions.	
SERVICE REMINDERS.....	58
STORING THE TRACTOR.....	59
SAFETY SUGGESTIONS.....	60-61
TRACTOR DIFFICULTIES.....	62-68
JOHN DEERE DEALER PARTS AND SERVICE.....	69
INDEX.....	70-71

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>

Even though your dealer has carefully inspected this tractor before delivering it to you, it is always good business to recheck the items which are circled on the reproduction below of the envelope which contains this manual.

TO THE NEW JOHN DEERE TRACTOR OWNER


Each John Deere Tractor is carefully designed, assembled, and given a complete test and final inspection at the factory before it is shipped. Our main ambition is to deliver tractors to new owners in the same mechanical condition as when shipped from the factory.

To enable us to fulfill this one ambition, this tractor was carefully inspected for irregularities that may have occurred in shipment. This inspection included a complete checking of the following:

- Wheel equipment. Tire pressure Wheel weights; Install calcium chloride if requested by new owner.
- Radiator. Fill with water or anti-freeze; Inspect shutter control.
- Air cleaner. Oil level.
- Crankcase. Oil level.
- Transmission oil level.
- Steering housing oil level.
- Power lift or Powr-Trol oil level.
- Oil crankcase breather core.
- Grease tractor.
- Rear wheel brakes.
- Clutch operation.
- Spark plug gaps.

- Carburetor setting (may require adjusting later according to fuel burned) (See Instructions in Manual.)
- Engine speed and oil pressure.
- Inspect rubber hose connections.
- Connect battery ground terminal. Check (water level.) Grease terminal posts.
- Check lights.
- Check starting motor for operation.
- Serial numbers entered in owner's register.

The above inspection made by John Doe
 Date 8/15 Dealer Good Business Supplement Co.



**HANG THIS BOOK IN A
HANDY PLACE**


We suggest this rechecking especially during freezing weather or when a period of time has elapsed between delivery and when you are ready to operate it. For complete starting information, see page 14.



We, your John Deere dealer, are mighty proud to add your name to our list of John Deere Tractor owners. Because we are interested in having you obtain from this new tractor all the comfort and long life that are built into it, we are pleased to discuss the following important maintenance operations:

- Controls.
- Breaking-in Period—Part Load, Open Throttle, Changing Oil.
- Method of Starting and Stopping Engine.
- Lubrication—Engine, Transmission, Power Lift, Powr-Trol, Grease Fittings, Air Cleaner and Oil Gauge.
- Cooling System—Adding Water, Shutter Control, Cleaning.
- Fuel System—Fuel, Fuel Control, Sediment Bowl and Trap, Carburetor Adjustment.
- Crankcase Breather and Ventilator.
- Tires—Inflation, Inspection, Wheel Weights.
- Drawbar—Adjustment; pull from no other place.
- Ignition System—Terminals Tight, Cleaning, Oiling, Adjusting Points.
- Rear Wheel Brakes—Adjustment.
- Clutch—Adjustment, Pulley Brake.
- Front Wheels—Cleaning, Adjustment and Spacing.
- Power Lift or Powr-Trol—Drop Control, Operation.
- Starter and Lights—Starting, Lights, Battery Care.
- Tightening Bolts and Nuts—Caution on Governor Cover Cap Screws.
- Safety in Operation—Selecting Proper Speed, Power Shaft.
- Keeping the Tractor Clean.
- Have Farmer Operate the Tractor.
- Appointment for After-Sales Service—not later than two weeks after delivery.

*John Deere
Model "G" Tractor—
Pulley Side*

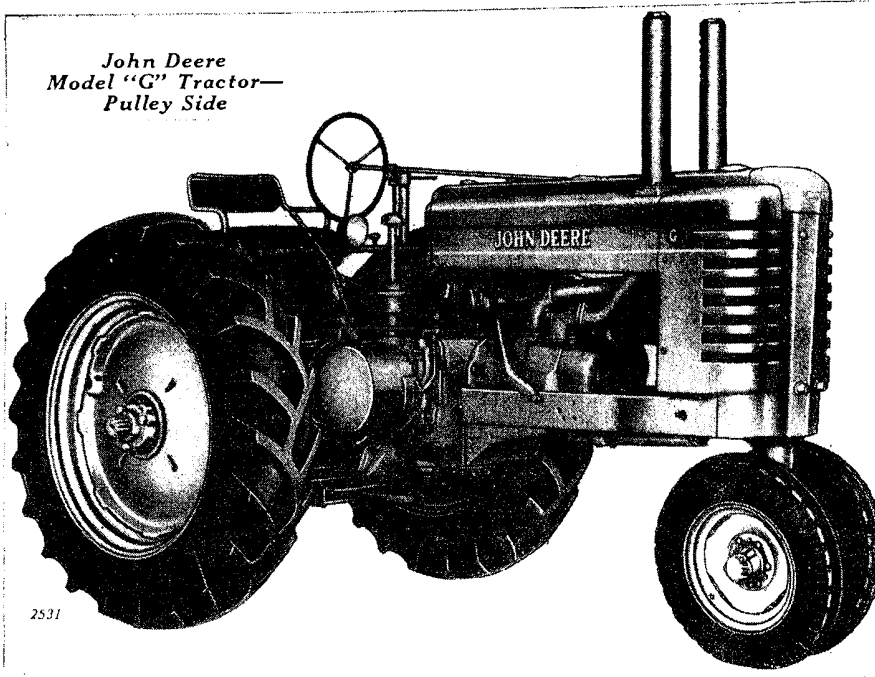

S P E C I F I C A T I O N S

CAPACITY . . . 3-14" plow bottoms or a 4-bottom bedder under normal conditions.

Maximum Belt Horsepower 38.10

Maximum Drawbar Horsepower 34.49

Maximum Pull (2nd gear) 3734 lbs. at 3.22 M.P.H.
(The above listed horsepower ratings are taken from "G" Nebraska tractor test No. 383.)

SPEEDS:

Forward . . . 2-1/2, 3-1/2, 4-1/2, 6-1/2, 8-3/4 and 12-1/2 M.P.H. on 12-38—6-ply tires.

Reverse 3-1/4 M.P.H.

ENGINE:

Engine . . . Two-cylinder cast-in-block—valves in head.

Engine Speed 975 R.P.M. (Load).

Bore and Stroke 6-1/8" x 7".

Displacement 413 cubic inches.

Compression Ratio 4.20 to 1

Carburetor Natural-draft type

Ignition System . . High-tension magneto or battery distributor.

Spark Plugs . . . 18 mm. Champion No. 8 Com. C.

Lubrication . . . Full force-feed pressure system; with Purolator oil filter element.
Total oil capacity—11 U. S. quarts.


Cooling System . . . Thermo-siphon system with a water capacity of 12-7/8 U. S. gallons.

Air Cleaner Oil-wash type.

Fuel System . . . Gravity-feed fuel system. Gasoline tank capacity—1-1/2 U. S. gallons. Fuel tank capacity—17 U. S. gallons.

Clutch . . . Hand operated four 10" dry disks, locking in and out.

Belt Pulley . . . Diameter 12-3/4"; width 8-1/2"; 975 R.P.M.; Belt Speed 3270 F.P.M.

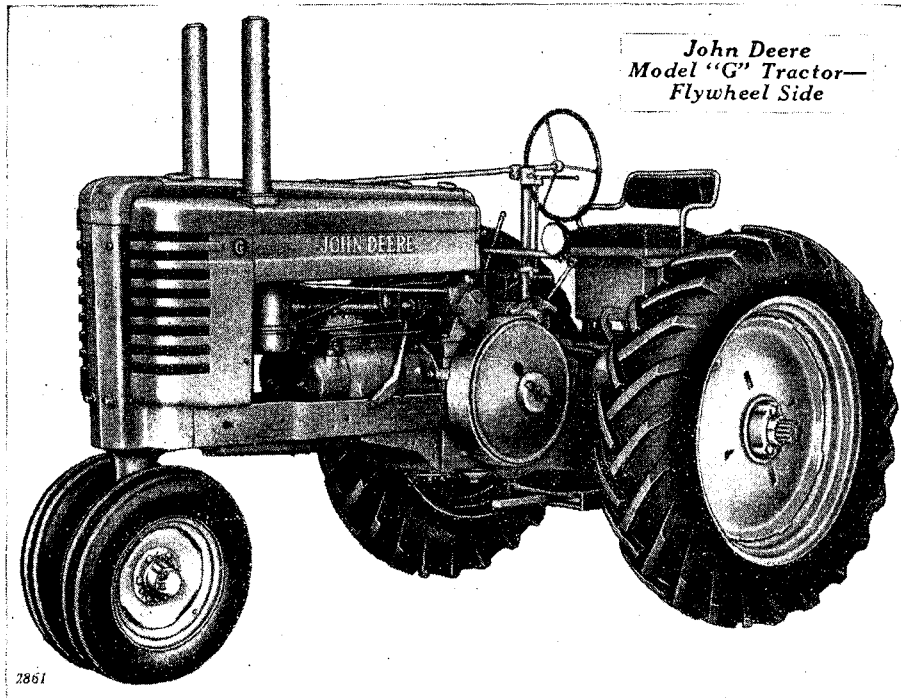

John Deere
Model "G" Tractor—
Flywheel Side

2861

A N D D A T A

TRANSMISSION:

Speeds Six forward and one in reverse.
Gears Selective type straight spur cut gears, forged, cut and heat treated.
Bearings Shafts operate on 7 Hyatt Rollers, 4 Timken-tapered, and 4 New Departure ball bearings. Oil capacity 7 U. S. gallons.

REAR AXLES 3-1/4" diameter. Mounted on 4 Timken-tapered roller bearings.

REAR WHEELS 12-38—6-ply tires, mounted on cast wheels, recommended for average field conditions. Steel spoke wheels with lugs available as special equipment. Diameter 51-1/2". Face 7". (Furnished with 4 speeds only.)

REAR WHEEL BRAKES Two automotive type internal expanding rear wheel brakes.

POWER TAKE-OFF Shaft diameter 1-3/4"; R.P.M. 532; splined end is 19-3/4" above ground, 1-9/16" to right of center line of tractor and 14" ahead of hitch. Conforms with A.S.A.E. standards.

FRONT WHEELS:

"G" Reversible for added clearance. 6.00 x 16", 4-ply rubber tires. Mounted on 4 Timken-tapered roller bearings.

"GN" Uses 7.50 x 16", 8-ply tire. Wheel mounted on 2 Timken-tapered roller bearings.

"GW" Uses 6.00 x 16", 6-ply tires. Wheels mounted on 4 Timken-tapered roller bearings.


DIMENSIONS:

	"G"	"GN"	"GW"
Wheel Base	91"	91-1/4"	97-3/8"
Over-All Height	86-7/8"	89-1/2"	88-1/8"
Height to Radiator Cap	65-7/8"	67-1/8"	68-1/2"
Over-All Length	137-7/16"	140-13/16"	145-11/16"
Width Over Axles	84"	84"	84"
Tread Adjustment	60"-84"	60"-84"	60"-84"
Clearance	26-1/2"	26-1/2"	26-1/2"
Turning Radius	8' 6"	10' 4"	16' 8"

SHIPPING WEIGHT 5601 lbs. 5694 lbs. 5974 lbs.

(Weights are for Tractors dry and with wheel equipment as shown under "Front Wheels" and "Rear Wheels.")


(Detailed design subject to change without notice)

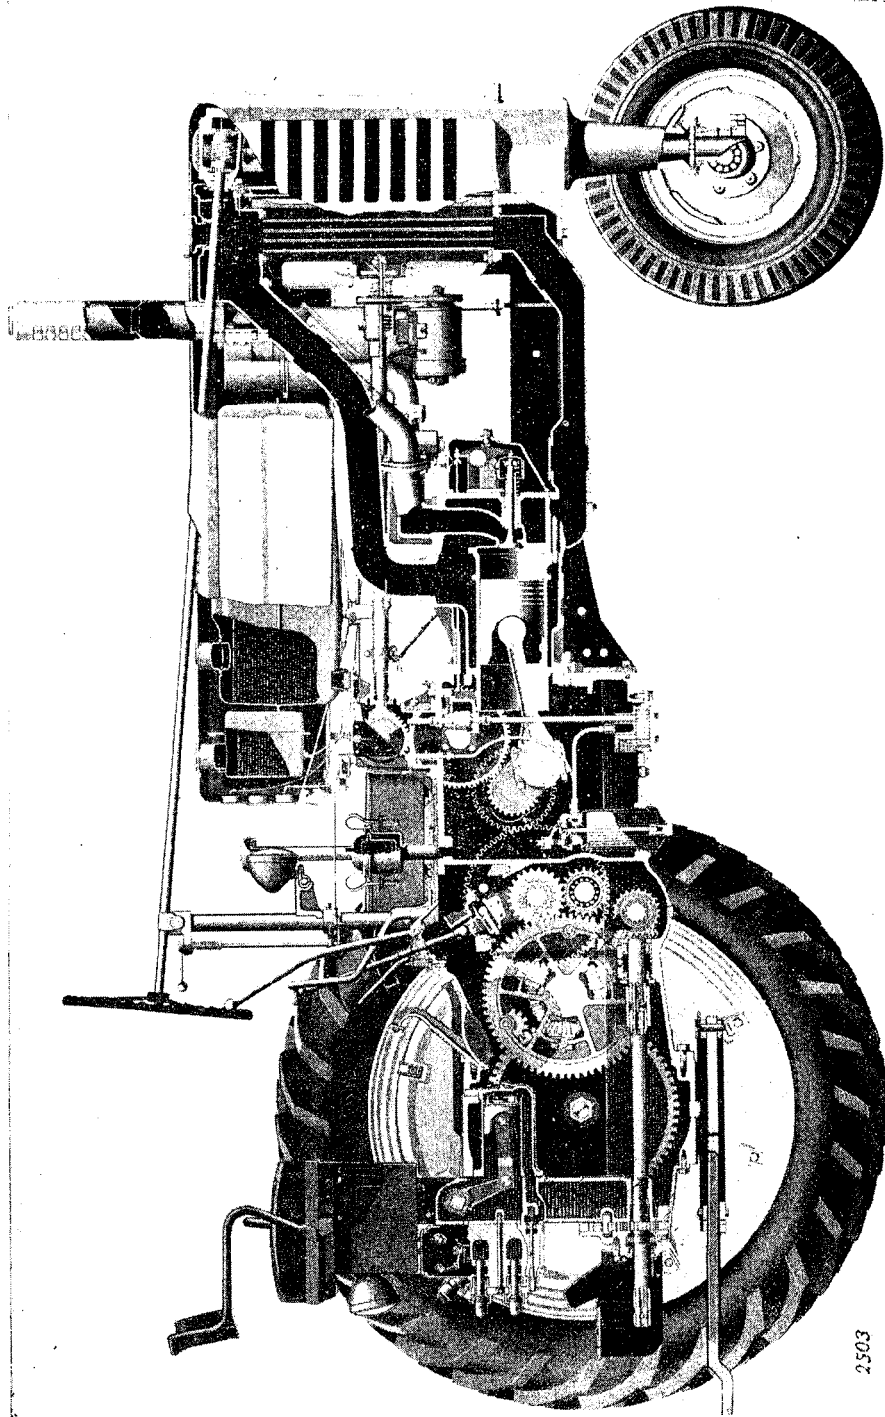

Cross-Sectional View of John Deere Model "G" Tractor

2503

CONTROLS

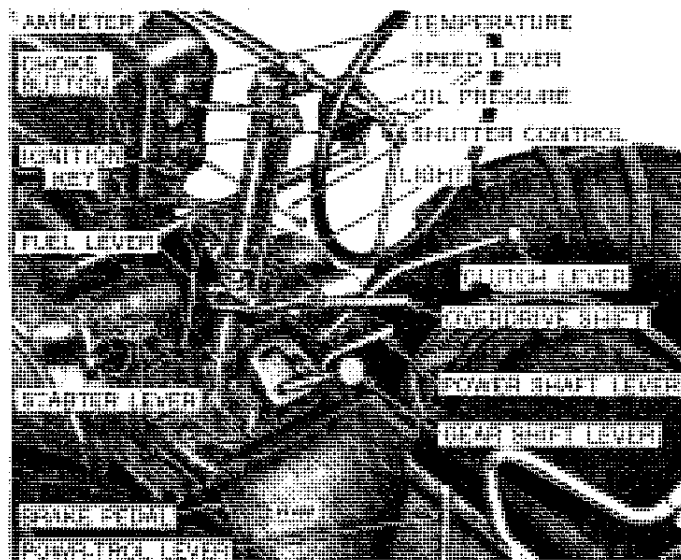

*Controls of John Deere
Model "G" Tractor*

The quality of work and the amount of work you do with your tractor not only depends upon the use of proper equipment, but also upon the ease and convenience of tractor operation. If you are in an uncomfortable position, if you have to fight the steering wheel, or if you can't see what you are doing, you are definitely handicapped.

Your John Deere tractor is as convenient to handle as your automobile. All controls are readily accessible. Clutch lever, throttle, fuel control, radiator shutter control and Powr-Trol lever are reached easily from the operator's seat. Under your feet are the convenient brakes, and a large, comfortable platform on which you can stand if you so desire.

Familiarize yourself with all the controls provided for safe and easy operation of your new tractor. Regardless of your previous tractor experience, study this section covering controls carefully before you operate your tractor.


SEAT AND BATTERY COMPARTMENT

The deep-cushion seat increases operator comfort and reduces fatigue at the wheel. It can be quickly and easily adjusted to suit the operator by simply pulling out on the seat latch and pushing seat to any desired position. Arm and back rests safeguard the operator when traveling over rough ground.

The high seat location affords the operator an unexcelled view of his work.


The seat support provides sturdy, cool, clean, safe and well-shielded compartment for the batteries. Convenience of batteries insures periodic checking and inspecting which results in longer battery life.

By lifting up the seat cushion or sliding the seat forward, the batteries are readily accessible for servicing.

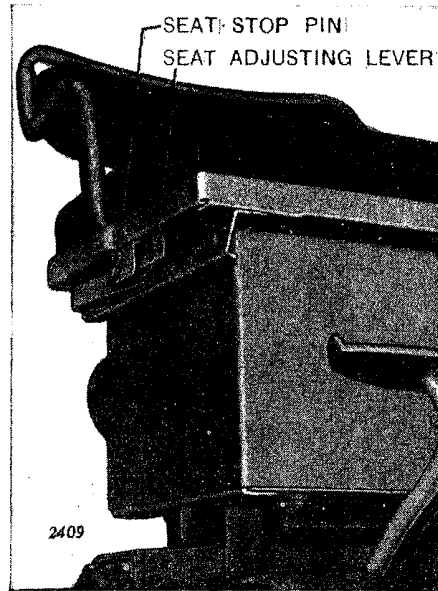

Seat

STEERING

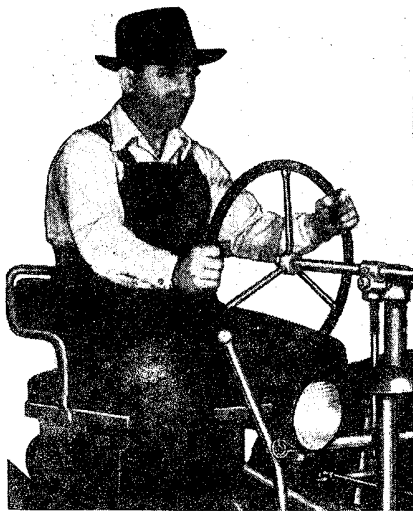


Steering Wheel

Due to the high, centered seat location, tapered fuel tank, and narrow, streamlined design, you can easily see what you are doing at either side. This design, coupled with a steering mechanism built to eliminate entirely objectionable wobble, backlash, or whipping of the steering wheel, even in the roughest going, permits you to work in freedom and comfort.

Smooth, responsive steering can be maintained throughout the life of your tractor by means of the adjustments provided for this purpose.

Adjustments can be quickly and easily made by your John Deere dealer's serviceman.

RADIATOR SHUTTER, INSTRUMENT PANEL, AND CONTROLS

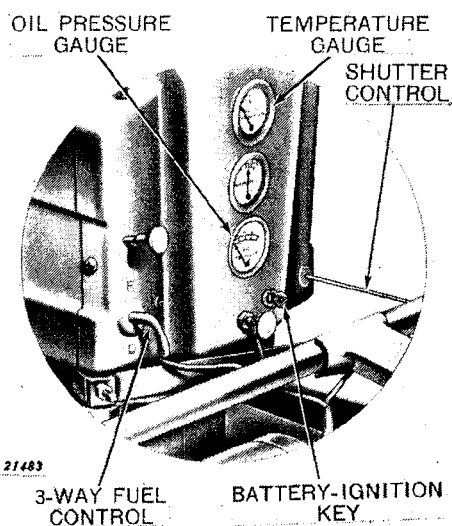

Gauges and Controls


For greater all-around economy, better lubrication, and more power, All-Fuel engines should be operated at a temperature of 190° F. Engine temperature is effectively controlled from the driver's seat by means of a manually-operated radiator shutter. The engine temperature gauge on the instrument panel indicates when to adjust the shutter.

A convenient, three-way fuel control lever on the All-Fuel tractor is located on the instrument panel, enabling the operator to switch from gasoline to low-cost fuel or to shut off the fuel supply

entirely without leaving his position at the wheel.

While engine temperature is not so important when burning gasoline, it is good practice to maintain an operating temperature of at least 180° F.

The oil pressure gauge is also located on the instrument panel. This gauge does not in any way tell the amount or condition of the oil in the crankcase. It only indicates whether the oil pump is working. The indicator hand of the gauge should rest between the letters "M" and "H" when the engine is running fast idle. If pressure is not registered on the oil gauge when the engine is started, stop the engine immediately.

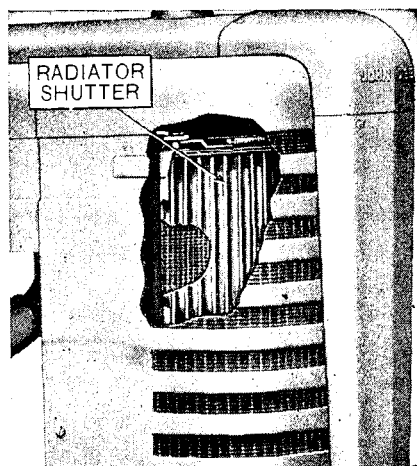

Radiator Shutter

If your tractor is equipped with battery-ignition, it is necessary to use the ignition key when starting or stopping the engine. Ignition is "on" when key is turned to the right.


The ammeter indicates whether or not the generator is charging.

CHOKE

When starting the engine, set choke in full choke position. (On tractors equipped with electric starters, choking is controlled by a button mounted on the instrument panel. On tractors not equipped with electric starters, choke lever is on the carburetor.)

Overchoking or excessive use of the choke will flood the engine, causing hard starting.

ENGINE CRANKING

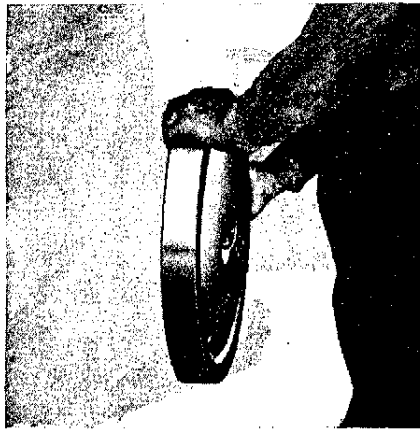


Hand Cranking


Hand Cranking: If your tractor is not equipped with an electric starter, you will find that the flywheel method of starting is simple, safe, and easy. You simply grasp the flywheel and roll it forward slowly. All controls are within easy reach.

Electric Starting: To start the tractor, pull choke, and step on starter lever. *NOTE: If your tractor is equipped with battery-ignition, first turn ignition key to right.* The starting motor is geared into the flywheel, which is protected by a guard. For additional information on starting, see section "Starting the New Tractor," page 14.


FULL CHOKE POSITION

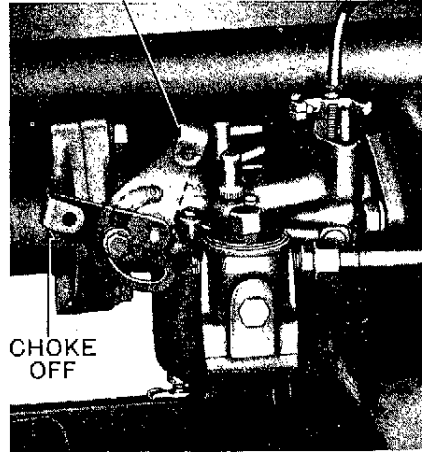

Choke

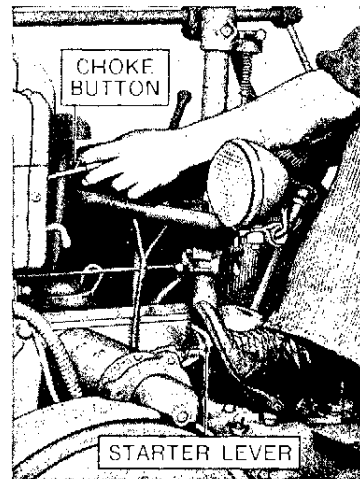

Electric Starting

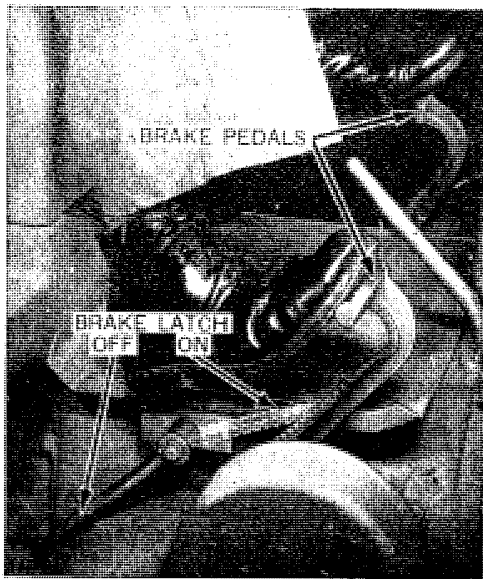

Brake Operation


BRAKES

Individually foot-operated brakes make possible short turns to right or left at row-ends.

If the brakes are pressed simultaneously with both feet, they assure you safer stopping at high transport speeds.

A brake latch is conveniently located for locking each brake when doing belt work or when stopping the tractor on a hill or incline.

CLUTCH LEVER

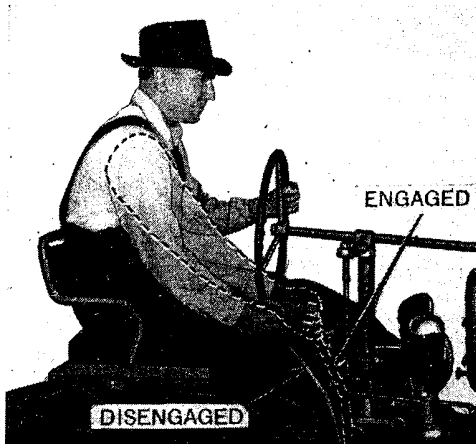

Clutch Lever


The power required in putting the tractor in motion is gradually and smoothly applied to the drive system by slowly pushing the clutch lever forward. As the tractor picks up speed, give the lever a quick forward thrust until the clutch snaps into engagement.

By pulling back on the clutch lever, the clutch is released and the engine disconnected from the transmission. The pulley

brake, which is a part of the clutch lever, stops the pulley from rotating, permitting easy shifting of the transmission gears.

When the engine is running and the tractor is not moving, the life of the clutch parts and pulley bearings can be prolonged by shifting the gear shift lever into neutral and engaging the clutch. This allows the pulley and crankshaft to turn as one unit, reducing frictional wear, and lengthening the life of clutch parts.

GEAR SHIFT LEVER

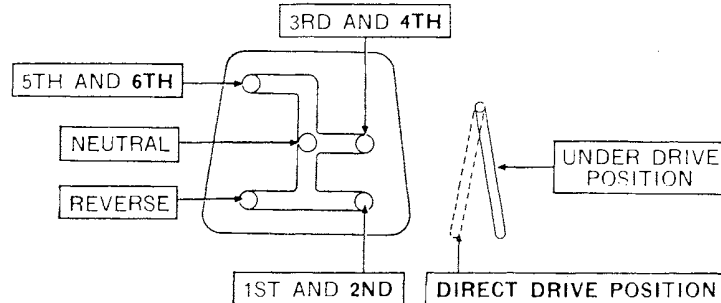


Gear Shift and Underdrive Lever Positions

Familiarize yourself with the shifting diagrams before you attempt to operate the tractor.

If gears do not shift freely, move clutch lever forward until pulley turns slowly. This allows gear teeth to line up for shifting.

Avoid clashing of gears. This causes unnecessary wear and possible breakage.

POWER SHAFT

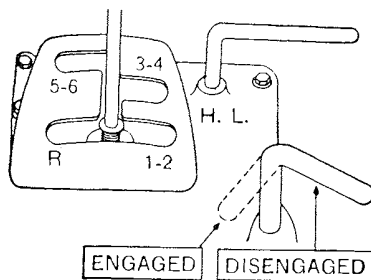


Power Shaft Shift Lever in Engaged Position

The power shaft is started and stopped with the clutch lever and can be operated whether the tractor is moving or not. To put the power shaft into operation, first move the power shaft shift lever to the engaged position, with gears in mesh. With the engine running, engage the clutch and the power shaft will operate.

Whenever the use of the power shaft is not required, disengage the power shaft shift lever.


The power shaft master safety shield is provided for the safety of the operator. This master shield should be removed only when necessary to mount some integral equipment where the power shaft is used. Replace the master shield immediately upon removal of the equipment.

The power shaft flipper guard should **never** be removed from the tractor. Do not operate the tractor with the end of the power shaft exposed. If the flipper guard is damaged, repair or replace it immediately.

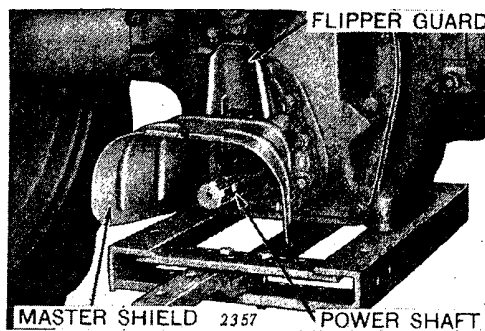

Power Shaft Flipper Guard and Master Shield

NOTE: Make it a standing rule never to dismount from the tractor without first disengaging the power shaft lever.

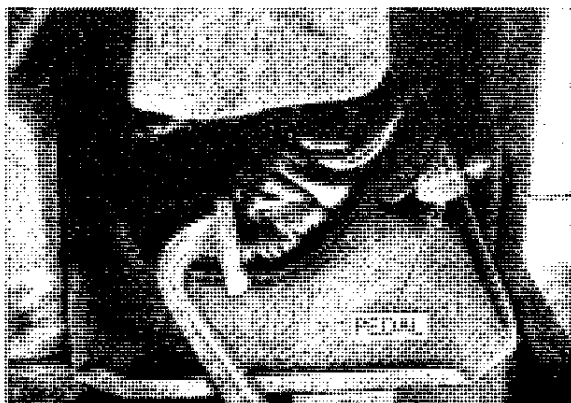

Power Lift Pedal

POWER LIFT

The hydraulic power lift is simple and positive in action and provides a cushioned drop for all equipment. To put the power lift into operation, first move the power shaft shift lever to the engaged position. With the engine running and the clutch engaged, the power lift is now ready to function. To operate

the power lift, step down on the pedal with the heel of either foot.

Equipment can be raised or lowered while the tractor is in motion or standing still.

POWR-TROL

The Powr-Trol system can be used for rockshaft operation or with remote cylinder and the operation of the Powr-Trol lever is the same for both.

To operate the Powr-Trol move lever to one of five positions: 1—neutral, 2—slow raise, 3—fast raise, 4—slow drop, and 5—fast drop.


1. The neutral position of the lever is slightly forward of vertical.

2. To decrease depth of the implement or to raise it slowly, move the lever forward approximately one-half of its travel. The lever must be held in this position until the desired adjustment is reached.

3. To raise implement fast, move lever forward to its farthest position (not necessary to hold). The lever will return to neutral position automatically on completion of lifting stroke.

4. To increase depth of the implement or to drop it slowly, move the lever to the rear approximately one-half of its travel. The lever must be held in this position until the desired adjustment is reached.

5. To drop implement fast, move the lever to the rear as far as possible. The lever will remain in this position until used again in rockshaft operation. With remote cylinder the control lever returns automatically to neutral upon completion of the lowering cycle.

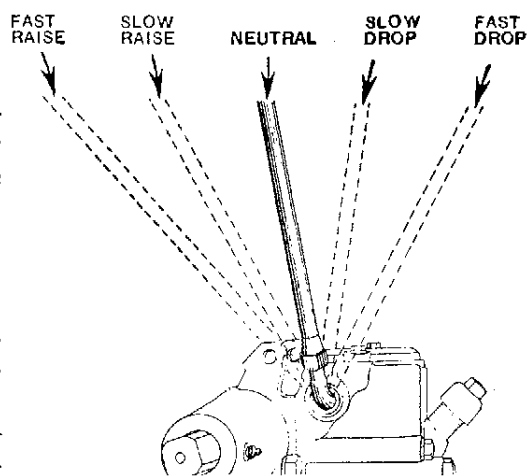

Powr-Trol Lever



Suggest:

If the above button click is invalid.

Please download this document

first, and then click the above link

to download the complete manual.

Thank you so much for reading


STARTING THE NEW TRACTOR

FUELS

Now that you are familiar with the controls, your next consideration before starting your tractor is the type of fuel you are going to use.

This John Deere tractor engine is designed to operate on gasoline, power fuel, tractor fuel or kerosene, and no difficulty will be experienced with these fuels if the simple operating directions are followed.

Distillates and other low-octane, lower-cost fuels are manufactured to a variety of specifications; therefore, the tractor owner should investigate available fuels to determine which will give the most satisfactory results under the prevailing operating conditions, making sure that the directions are followed for adjusting carburetor and maintaining temperature.

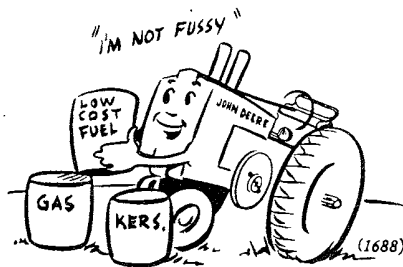

In all communities where these low-octane fuels are available, they are generally used in John Deere tractors because these tractors will burn them successfully without any detrimental effect to the working parts of the tractor and at a saving in fuel costs.


FUEL STORAGE

Fuel should be stored in a convenient place outside of buildings. If fuel drums are used, they should be located in a shady spot to prevent undue evaporation.

A rack for holding fuel and oil drums is simple to make and saves time and labor in refueling and lubricating the tractor, truck, or family car.

These racks are built of two by fours, a few boards, and a handful of nails. Bolts are recommended instead of nails for the main framework.

Illustration at right shows a single-deck rack with a dustproof cabinet in one end to store grease, oil funnel, measuring can, etc.



*Single-Deck
Fuel Storage Rack*

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>