

SRX75 and SRX95

Riding Mowers

(Serial No. 010001-)

John Deere Horicon Works
OMM113855 Issue J1

European Edition
LITHO IN U.S.A.
ENGLISH

THANK YOU for purchasing a John Deere product.

READ THIS MANUAL carefully to learn how to operate and service your riding mower correctly. Failure to do so could result in personal injury or equipment damage.

THIS MANUAL SHOULD BE CONSIDERED a permanent part of your riding mower and should remain with the riding mower when you sell it.

MEASUREMENTS in this manual are U.S. customary units and their metric equivalents.

RIGHT-HAND AND LEFT-HAND sides are determined by facing in the direction the implement will travel when going forward.

WRITE IDENTIFICATION NUMBERS in the Specifications section. Accurately record all the numbers to help in tracing your riding mower should it be stolen. Your dealer also needs these numbers when you order parts. Also file the identification numbers in a secure place off the riding mower.

WARRANTY is provided as part of John Deere's support program for customers who operate and maintain their equipment as described in this manual. The warranty is explained on the warranty certificate which you should have received from your dealer.

This warranty provides you the assurance that John Deere will back its products where defects appear within the warranty period. In some circumstances, John Deere also provides field improvements, often without charge to the customer, even if the product is out of warranty. Should the equipment be abused, or modified to change its performance beyond the original factory specifications, the warranty will become void and field improvements may be denied. Setting fuel delivery above specifications or otherwise overpowering machines will result in such action.



M74329
-UN-18JUN90

MX,IFC,95307 -19-14JAN91

Contents

	Page		Page
Safety	1	Fuel and Lubricants	
Safety Signs	6	Handle Fuel Safely—Avoid Fires	40
Controls	11	Before Refueling Riding Mower	41
Operating Engine		Refueling Riding Mower	41
Starting Engine	14	Fuel Recommendations	42
Cold Weather Starting	16	Filling Fuel Tank	42
Starting Engine	17	Engine Oil	43
Driving Riding Mower		Service	
Locking and Unlocking Park Brake	18	John Deere Parts—Your Best Choice	44
Emergency Stopping	19	Service Intervals	45
Adjusting Seat	19	Checking Engine Oil Level	46
Traveling Forward or in Reverse	20	Cleaning Blower Screen—SRX95	47
Driving Riding Mower	21	Cleaning Blower Screen—SRX75	47
Parking Riding Mower	21	Check Tires	48
Operating Mower		Lubricating Axle Spindles	49
Operate Mower Safely	23	Lubricating Mower Spindles	49
Raising and Lowering Mower	24	Checking Drive Belts	49
Setting Mower Height	24	Cleaning Air Cleaner—SRX95	50
Adjusting Gauge Wheels(s)—SRX75	24	Cleaning Air Cleaner—SRX75	51
Adjusting Gauge Wheels(s)—SRX95	25	Checking Battery Electrolyte Level	53
Preparing Riding Mower for Leveling of Mower	26	Changing Engine Oil	54
Adjusting Mower Level (Side-To-Side)	26	Adjusting Brake Pedal Linkage	56
Leveling Mower (Side-To-Side)	27	Checking Spark Plug	57
Leveling Mower (Front-To-Rear)	27	Adjusting Mower Engagement Rod—PTO	59
Adjusting Mower Lvel (Front-To-Rear)	28	Changing Fuel Filter	60
Engaging Mower	28	Replacing Fuse	61
Disengaging Mower	29	Removing and Installing Mower Blades	62
Blade Recommendation	35	Sharpening Blades	62
Mowing for a Better Lawn	36	Balancing Blades	63
Mowing Tall Grass	36	Checking Blade	63
After Mowing (SRX95)	37	Cleaning Battery	64
After Mowing (SRX75)	37	Charging Battery	66
Transporting	39	Using Booster Battery	67
		Check Adjustment of Mower Engagement Rod (PTO)	67
		Restoring Ground-Speed of Riding Mower	68
		Removing Mower (30-Inch)	71
		Installing Mower (30-Inch)	72

Continued on next page

All information, illustrations and specifications in this manual are based on the latest information available at the time of publication. The right is reserved to make changes at any time without notice.

OMM113855 J1-19-13SEP91

COPYRIGHT© 1991
DEERE & COMPANY
Moline, Illinois
All rights reserved
A John Deere ILLUSTRATION™ Manual
Previous Editions
Copyright 1990 Deere & Company

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>

Contents


	Page
Removing Mower (38-Inch)	74
Installing Mower (38-Inch)	75
Removing Mower Belt (30-Inch)	76
Installing Mower Belt (30-Inch)	78
Removing Mower Belt (38-Inch)	80
Installing Mower Belt (38-Inch)	82
Preparing Riding Mower for Removal of Drive Belts	83
Removing Primary Drive Belt	84
Installing Primary Drive Belt	87
Removing Secondary Drive Belt	90
Installing Secondary Drive Belt	93
Checking and Adjusting Drive Belt Guides.	96
Troubleshooting	97
Storage	99
Assembly	101
Specifications	108
Index	

Safety

RECOGNIZE SAFETY INFORMATION

This is the safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.

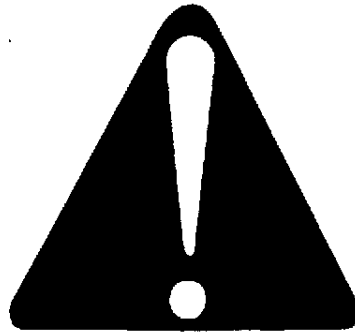

DX,ALERT -19-04JUN90

T81389 -UN-07DEC88

UNDERSTAND SIGNAL WORDS

A signal word—DANGER, WARNING, or CAUTION—is used with the safety-alert symbol. DANGER identifies the most serious hazards.

DANGER or WARNING safety signs are located near specific hazards. General precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.



DX,SIGNAL -19-04JUN90

TS187 -19-30SEP88


FOLLOW SAFETY INSTRUCTIONS

Carefully read all safety messages in this manual and on your machine safety signs. Keep safety signs in good condition. Replace missing or damaged safety signs. Be sure new equipment components and repair parts include the current safety signs. Replacement safety signs are available from your John Deere dealer.

Learn how to operate the machine and how to use controls properly. Do not let anyone operate without instruction.

Keep your machine in proper working condition. Unauthorized modifications to the machine may impair the function and/or safety and affect machine life.

If you do not understand any part of this manual and need assistance, contact your John Deere dealer.

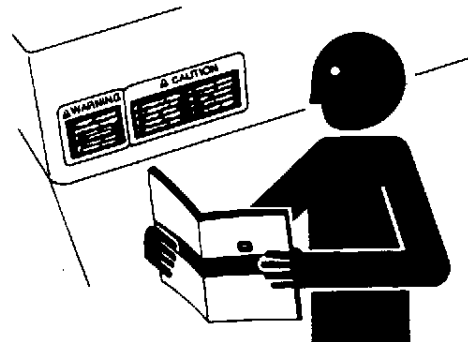

DX,READ -19-04JUN90

TS201 -UN-23AUG88



SOUND LABEL

This label on your mower indicates that this model has been certified and is in compliance with European Economic Community 84-538 requirement.



Sound Power Level

M71371 -UN-13SEP91

MX,SOUND,38 -19-07SEP91

PROTECT CHILDREN

Before you back up, look behind for children.

Keep children and pets out of mowing area.

DO NOT let children ride on riding mower, or any attachment.

DO NOT let children use riding mower.



IM61420 -UN-01SEP88

MX,SAHO,A -19-14JAN91

AVOID TIPPING

DO NOT use mower near ditch or bank. Avoid holes, rocks, and roots.

Before you make sharp turns, slow down.

Install front weight before you use on slopes. Use up and down—not across slopes.

On slopes:

- Avoid sudden stops and starts.
- Be careful when you change directions.
- Avoid parking.



IM41422 -UN-30AUG88

MX,SAHO,B -19-14JAN91




KEEP RIDERS OFF MACHINE

Only allow operator on machine. Keep riders off.

Riders on machine are subject to injury such as being struck by foreign objects and thrown off of machine.

Riders also obstruct operator's view resulting in machine being operated in an unsafe manner.

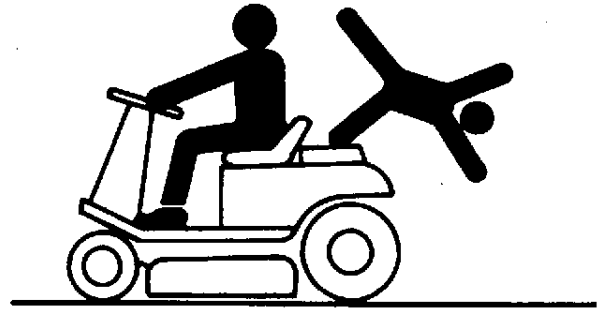

MX,SAHO,C -19-14JAN91

M61421 -UN-01SEP88

HANDLE FUEL SAFELY—AVOID FIRES

Handle fuel with care, it is highly flammable.

DO NOT refuel machine:


- While you smoke.
- When machine is near open flame or sparks.
- When engine is running. STOP engine.

Fill fuel tank outdoors.

Help prevent fires:

- Clean oil, grease and dirt from machine.
- Clean up spilled fuel immediately.

Do not store machine with fuel in tank in a building where fumes may reach an open flame or spark.

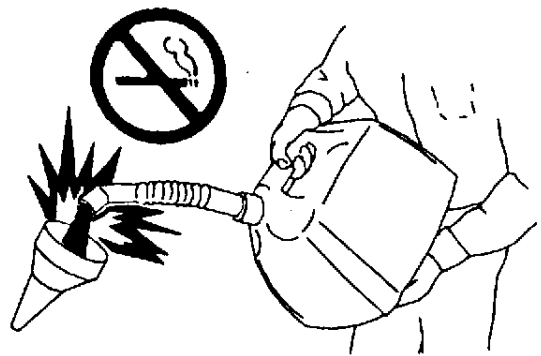

MX,FIRE,5 -19-31JUL91


MT73115 -UN-09MAR90

PREPARE FOR EMERGENCIES

Be prepared if a fire starts.

Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

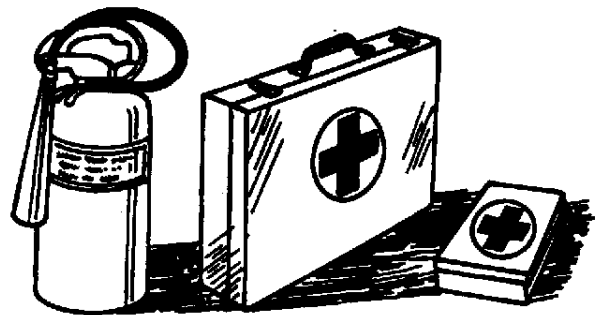

DX,FIRE2 -19-04JUN90

T5291 -UN-23AUG88




CHECK GROUND CONDITIONS

Clear mowing area of objects that might be thrown. Keep people and pets out of mowing area.

Study mowing area. Set up safe mowing pattern. Do not mow under conditions where traction or stability is doubtful.

First, test drive area with PTO OFF and mower lowered. Slow down when you travel over rough ground.

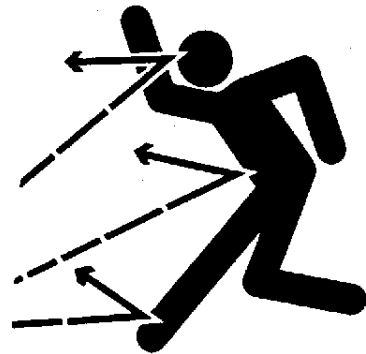

MX,SAHO,E -19-13SEP91

M41423 -UN-30AUG88


WEAR PROTECTIVE CLOTHING

Wear close fitting clothing and safety equipment appropriate to the job.

Prolonged exposure to loud noise can cause impairment or loss of hearing.

Wear a suitable hearing protective device such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.

Operating equipment safely requires the full attention of the operator. Do not wear radio or music headphones while operating machine.

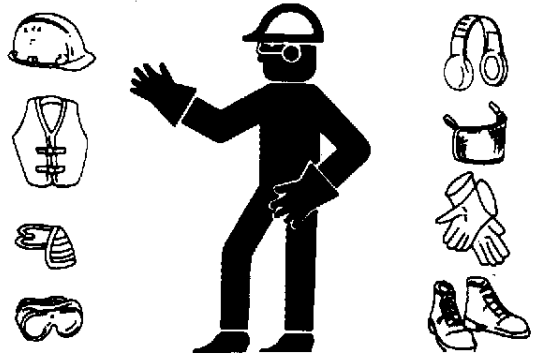

DX,WEAR -19-10SEP90

T5206 -UN-23AUG88


AVOID INJURY FROM CONTACTING BLADES

Before you dismount to unplug or adjust mower:

- Put shift lever in N (NEUTRAL) position.
- STOP engine.
- LOCK park brake.
- Pull PTO lever fully rearward.
- Remove key.
- Wait for mower blades to STOP.

Keep hands, feet and clothing away from mower deck when engine is running.

STOP mower blades when you are not using mower.

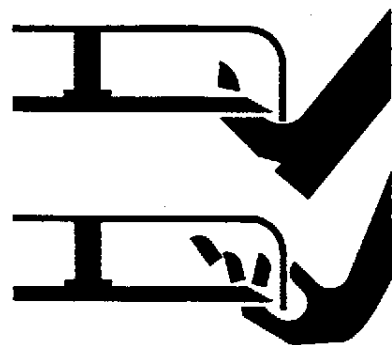

MX,SAHO,F -19-13SEP91

M41421 -UN-30AUG88



PRACTICE SAFE MAINTENANCE

Understand service procedure before doing work. Keep area clean and dry.

Never lubricate or service machine while it is moving. Keep hands, feet, and clothing from power-driven parts. Disengage all power and operate controls to relieve pressure. Lower equipment to the ground. Stop the engine. Remove the key. Allow machine to cool.

Securely support any machine elements that must be raised for service work.

Keep all parts in good condition and properly installed. Fix damage immediately. Replace worn or broken parts. Remove any buildup of grease, oil, or debris.

Disconnect battery ground cable (-) before making adjustments on electrical systems or welding on machine.



DX,SERV -19-04JUN90

TS218 -UN-23AUG88

DISPOSE OF WASTE PROPERLY


Improperly disposing of waste can threaten the environment and ecology. Potentially harmful waste used with John Deere equipment include such items as oil, fuel, coolant, brake fluid, filters, and batteries.

Use leakproof containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them.

Do not pour waste onto the ground, down a drain, or into any water source.

Air conditioning refrigerants escaping into the air can damage the Earth's atmosphere. Government regulations may require a certified air conditioning service center to recover and recycle used air conditioning refrigerants.

Inquire on the proper way to recycle or dispose of waste from your local environmental or recycling center, or from your John Deere dealer.



DX,DRAIN -19-09AUG91

TS1133 -UN-26NOV90

Safety Signs

READ SAFETY SIGNS



MX.REHO.A.UK -19-12SEP91

M71362 -19-10SEP91

-UN-09OCT90

M74404

! DANGER ! PELIGRO ! GEFAHR



- DO NOT OPERATE MOWER WITHOUT DISCHARGE CHUTE OR ENTIRE GRASS CATCHER IN PLACE.
- NE PAS UTILISER LA TONDEUSE SANS LA GOULETTE DÉJECTION OU LE RÉCUPÉRATEUR COMPLET EN PLACE.
- NO HACER FUNCIONAR LA SEGADORA SIN EL TUBO DE DESCARGA O TODA LA UNIDAD RECOLECTORA DE PASTO EN SU LUGAR.
- DEN MÄHER NIEMALS OHNE MONTIERTEN AUSWURFSCHUTZ UND SAMMELSACK BENUTZEN.



MX,REHO,B,UK -19-12SEP91

M71363 -19-10SEP91

M74403 -UN-09OCT90

⚠ DANGER

EXPLOSIVE GASES Cigarettes, flames or sparks could cause battery to explode. Always shield eyes and face from battery. Do not charge or use booster cables or adjust post connections without proper instruction and training. Keep vent caps tight and level.

POISON

CAUSES SEVERE BURNS Contains sulfuric acid. Avoid contact with skin, eyes or clothing. In event of accident, flush with water and call a physician immediately. Keep out of reach of children.




MX,REHO,C,UK -19-12SEP91

-19-13SEP91

M74408

-UN-09OCT90

M74405

	⚠ DANGER ROTATING BLADES CUT OFF ARMS AND LEGS • STOP MOWER WHEN CHILDREN ARE NEAR. • NO RIDERS, THEY FALL OFF. <small>ENGLISH</small> 5	⚠ PELIGRO LAS CUCHILLAS GIRATORIAS CORTAN BRAZOS Y PIERNAS • PARAR LA CORTADORA CUANDO HAY NIÑOS EN LA CERCANIA. • NO LLEVAR PASAJEROS, PUEDEN CAERSE. <small>SPANISH</small>	
-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------



CAUTION

HELP AVOID INJURY

- READ OPERATOR'S MANUAL.
- KNOW LOCATION AND FUNCTION OF CONTROLS.
- KEEP SAFETY DEVICES (GUARDS, SWITCHES) IN PLACE AND WORKING.
- NEVER CARRY CHILDREN.
- LOOK BEHIND WHEN BACKING.
- KEEP CHILDREN AND OTHERS AWAY WHEN OPERATING MACHINE.
- STOP ENGINE BEFORE PLACING HANDS OR FEET NEAR POWER DRIVEN PARTS.
- DO NOT DRIVE WHERE MACHINE COULD TIP OR SLIP.
- IF MACHINE STOPS GOING UPHILL, SHUT OFF PTO AND BACK DOWN SLOWLY.
- WHEN LEAVING MACHINE: • SHIFT CONTROL TO NEUTRAL
- STOP ENGINE • SET PARK BRAKE • REMOVE KEY

ENGLISH

PRECAUCION

AYUDAR A EVITAR LESIONES

- LEER EL MANUAL DEL OPERADOR.
- APPENDER LA UBICACION Y FUNCIONAMIENTO DE LOS CONTROLES.
- MANTENER LOS DISPOSITIVOS DE SEGURIDAD (PROTECTORES, INTERRUPTORES) EN SU LUGAR Y FUNCIONANDO.
- NO SUBIR NIÑOS AL TRACTOR.
- MIRAR HACIA ATRAS ANTES DE RETROCEDER.
- MANTENER A LOS NIÑOS Y DEMAS ALEJADOS DE LA MAQUINA MIENTRAS ESTÁ FUNCIONANDO.
- APAGAR EL MOTOR ANTES DE PONER LAS MANOS O LOS PIES CERCA DE LAS PIEZAS MECANICAS.
- NO CONDUCIR LA MAQUINA EN LUGARES DONDE PUDIERA PATINAR O VOLCARSE.
- SI LA MÁQUINA SE PARA MIENTRAS SUBE UNA PENDIENTE DESCONECTAR LA TDF Y RETROCEDER LENTAMENTE.
- ANTES DE BAJARSE DE LA MÁQUINA:
 - PONER LA PALANCA DE CAMBIOS EN PUNTO MUERTO
 - APAGER EL MOTOR • APLICAR EL FRENO DE ESTACIONAMIENTO • SACAR LA LLAVE DE CONTACTO

SPANISH

M74805 -19-10SEP91



M74266 -UN-09OCT90

MX.REHO.E.UK -19-12SEP91

Controls

PEDALS

- A—Brake Pedal
- B—Accelerator
- C—Park Brake



M74270 -UN-14JUN90




M74273 -UN-14JUN90

MX,CTHO,A -19-14JAN91

LEVERS AND KEY

- A—PTO Lever
- B—Shift Lever
- C—Ignition Key

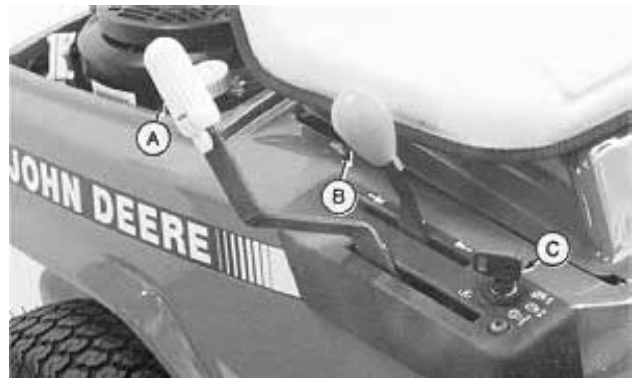

M74274 -UN-14JUN90


MX,CTHO,B -19-14JAN91

Controls

- A—Throttle Lever
- B—Mower Lift Lever



M74275 -UN-14JUN90

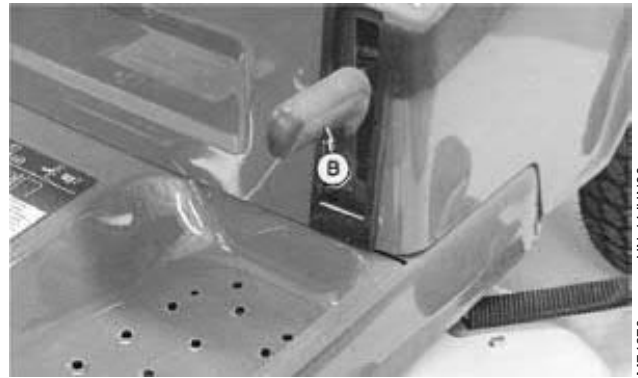


M74276 -UN-14JUN90

MX.CTHO.C -19-14JAN91

MOWER HEIGHT WINDOW INDICATOR

- A—Mower Height Window Indicator

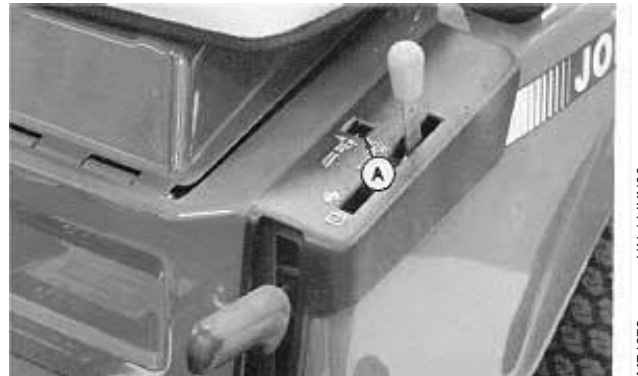

M74272 -UN-14JUN90

MX.CTHO.D -19-14JAN91



Suggest:

If the above button click is invalid.

Please download this document

first, and then click the above link

to download the complete manual.

Thank you so much for reading

FUEL SHUT-OFF VALVE

A—Fuel Shut-Off Valve



SRX75

M74277 -UN-19JUN90



SRX95

M74401 -UN-03JUL90

MX,CTHO,E -19-14JAN91

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>