

JOHN DEERE
WORLDWIDE COMMERCIAL & CONSUMER
EQUIPMENT DIVISION

Core Pulverizer
CP48

TM2098 JAN06

TECHNICAL MANUAL



JOHN DEERE

North American Version
Litho in U.S.A.

INTRODUCTION

Manual Description

This technical manual is written for an experienced technician and contains sections that are specifically for this product. It is a part of a total product support program.

The manual is organized so that all the information on a particular system is kept together. The order of grouping is as follows:

- Table of Contents
- Specifications and Information
- Identification Numbers
- Tools and Materials
- Component Location
- Schematics and Harnesses
- Theory of Operation
- Operation and Diagnostics
- Diagnostics
- Tests and Adjustments
- Repair
- Other

NOTE: Depending on the particular section or system being covered, not all of the above groups may be used.

The bleed tabs for the pages of each section will align with the sections listed on this page. Page numbering is consecutive from the beginning of the Safety section through the last section.

We appreciate your input on this manual. If you find any errors or want to comment on the layout of the manual please contact us.

Safety

Specifications and Information

Engine

Electrical


Miscellaneous

All information, illustrations and specifications in this manual are based on the latest information at the time of publication. The right is reserved to make changes at any time without notice.

COPYRIGHT© 2006
Deere & Co.
John Deere Worldwide Commercial and
Consumer Equipment Division
All rights reserved
Previous Editions
COPYRIGHT©

SAFETY

Recognize Safety Information

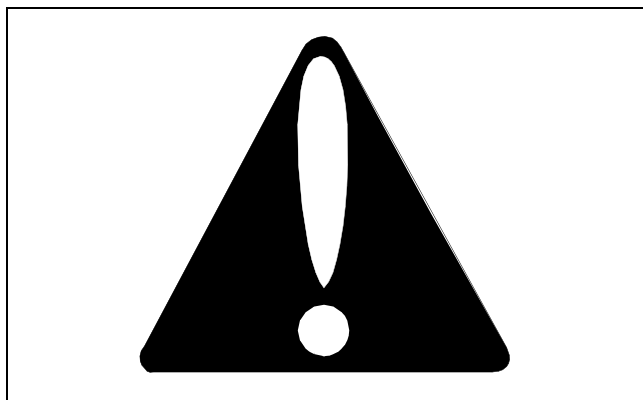

MIF

This is the safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.


Follow recommended precautions and safe servicing practices.

Understand Signal Words

A signal word - DANGER, WARNING, or CAUTION - is used with the safety-alert symbol. DANGER identifies the most serious hazards.

DANGER or WARNING safety signs are located near specific hazards. General precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.

Replace Safety Signs

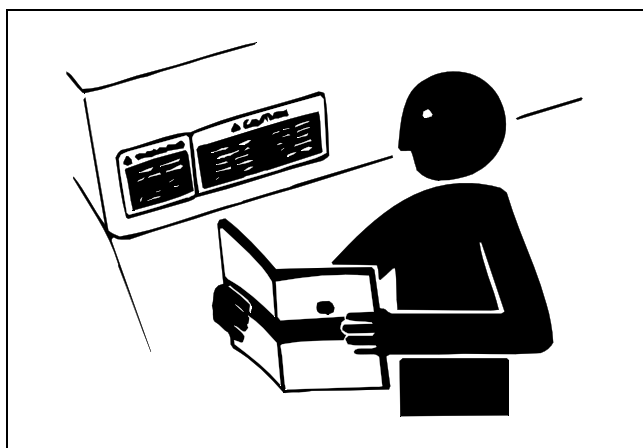


MIF

Replace missing or damaged safety signs. See the machine operator's manual for correct safety sign placement.

Handle Fluids Safely - Avoid Fires


Be Prepared For Emergencies

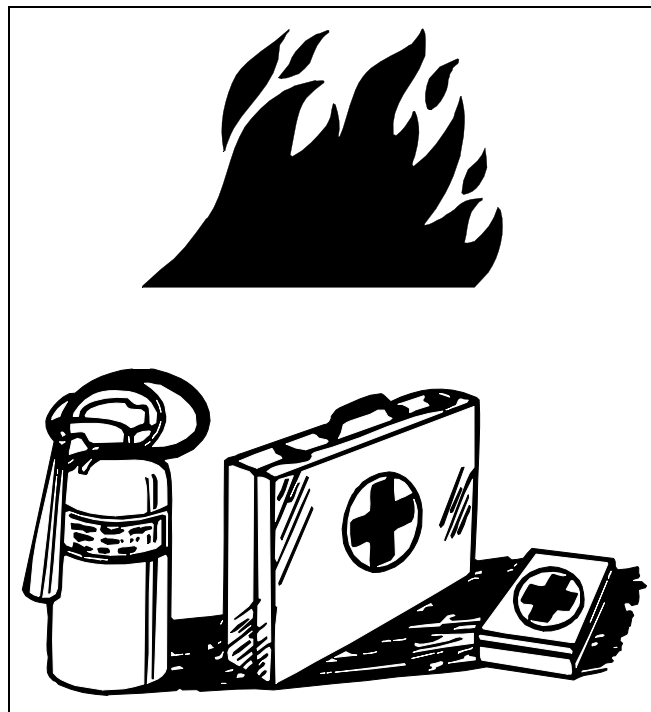

MIF

- When you work around fuel, do not smoke or work near heaters or other fire hazards.
- Store flammable fluids away from fire hazards. Do not incinerate or puncture pressurized containers.
- Make sure machine is clean of trash, grease, and debris.
- Do not store oily rags; they can ignite and burn spontaneously.
- Be prepared if a fire starts.
- Keep a first aid kit and fire extinguisher handy.
- Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

Use Care In Handling And Servicing Batteries

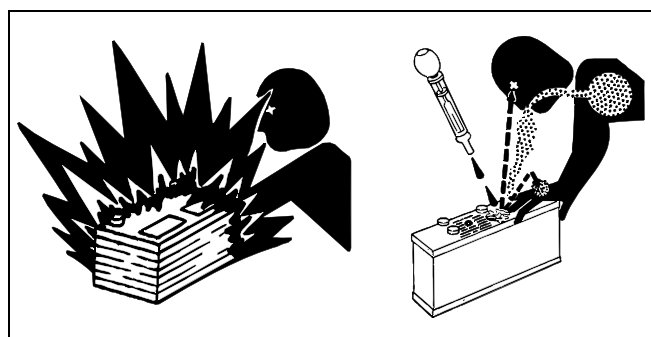

MIF

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>

SAFETY

Prevent Battery Explosions

- Keep sparks, lighted matches, and open flame away from the top of battery. Battery gas can explode.
- Never check battery charge by placing a metal object across the posts. Use a volt-meter or hydrometer.
- Do not charge a frozen battery; it may explode. Warm battery to 16°C (60°F).

Prevent Acid Burns

- Sulfuric acid in battery electrolyte is poisonous. It is strong enough to burn skin, eat holes in clothing, and cause blindness if splashed into eyes.

Avoid acid burns by:

1. Filling batteries in a well-ventilated area.
2. Wearing eye protection and rubber gloves.
3. Avoiding breathing fumes when electrolyte is added.
4. Avoiding spilling or dripping electrolyte.
5. Use proper jump start procedure.


If you spill acid on yourself:

1. Flush your skin with water.
2. Apply baking soda or lime to help neutralize the acid.
3. Flush your eyes with water for 10 - 15 minutes.
4. Get medical attention immediately.

If acid is swallowed:

1. Drink large amounts of water or milk.
2. Then drink milk of magnesia, beaten eggs, or vegetable oil.
3. Get medical attention immediately.

Wear Protective Clothing

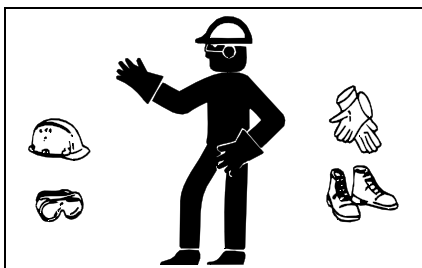

MIF


Wear close fitting clothing and safety equipment appropriate to the job.

Prolonged exposure to loud noise can cause impairment or loss of hearing. Wear a suitable hearing protective device

such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.

Operating equipment safely requires the full attention of the operator. Do not wear radio or music headphones while operating machine.

Service Machines Safely

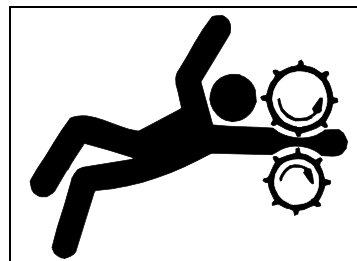

MIF

Tie long hair behind your head. Do not wear a necktie, scarf, loose clothing, or necklace when you work near machine tools or moving parts. If these items were to get caught, severe injury could result.

Remove rings and other jewelry to prevent electrical shorts and entanglement in moving parts.

Use Proper Tools


Use tools appropriate to the work. Makeshift tools and procedures can create safety hazards. Use power tools only to loosen threaded parts and fasteners. For loosening and tightening hardware, use the correct size tools. **DO NOT** use U.S. measurement tools on metric fasteners. Avoid bodily injury caused by slipping wrenches. Use only service parts meeting John Deere specifications.

Parking Safely

1. Stop machine on a level surface, not on a slope.
2. Disengage pulverizer PTO.
3. Lock park brake.
4. Stop machine engine.
5. Remove key.
6. Wait for engine and all moving parts to stop before you leave the operator's station.
7. Stop pulverizer engine.
8. Close fuel shut-off valve on pulverizer and machine, if your machine is equipped.
9. Disconnect the negative battery cable or remove the spark plug wire (for gasoline engines) before servicing the machine.
10. Hang a "DO NOT OPERATE" tag in operator station and on pulverizer at engine controls.

SAFETY

Support Machine Properly And Use Proper Lifting Equipment

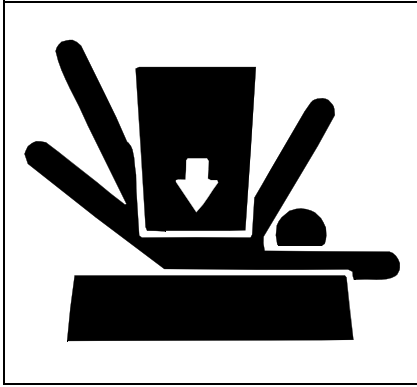

MIF

If you must work on a lifted machine or attachment, securely support the machine or attachment.

Do not support the machine on cinder blocks, hollow tiles, or props that may crumble under continuous load. Do not work under a machine that is supported solely by a jack. Follow recommended procedures in this manual.

Lifting heavy components incorrectly can cause severe injury or machine damage. Follow recommended procedure for removal and installation of components in the manual.

Work In Clean Area

Before starting a job:

1. Clean work area and machine.
2. Make sure you have all necessary tools to do your job.
3. Have the right parts on hand.
4. Read all instructions thoroughly; do not attempt shortcuts.


Using High Pressure Washers

Directing pressurized water at electronic/electrical components or connectors, bearings, hydraulic seals, fuel injection pumps or other sensitive parts and components may cause product malfunctions. Reduce pressure and spray at a 45 to 90 degree angle.

Illuminate Work Area Safely

Illuminate your work area adequately but safely. Use a portable safety light for working inside or under the machine. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.

Work In Ventilated Area

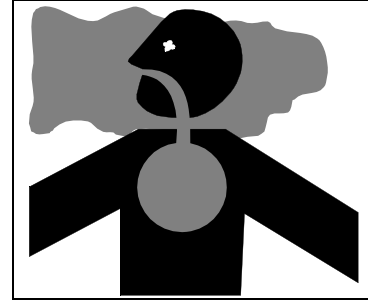

MIF

Engine exhaust fumes can cause sickness or death. If it is necessary to run an engine in an enclosed area, remove the exhaust fumes from the area with an exhaust pipe extension.

If you do not have an exhaust pipe extension, open the doors and get outside air into the area.

Warning: California Proposition 65 Warning

Gasoline engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects, and other reproductive harm.

Remove Paint Before Welding Or Heating

Avoid potentially toxic fumes and dust. Hazardous fumes can be generated when paint is heated by welding, soldering, or using a torch. Do all work outside or in a well ventilated area. Dispose of paint and solvent properly. Remove paint before welding or heating: If you sand or grind paint, avoid breathing the dust. Wear an approved respirator. If you use solvent or paint stripper, remove stripper with soap and water before welding. Remove solvent or paint stripper containers and other flammable material from area. Allow fumes to disperse at least 15 minutes before welding or heating.

SAFETY

Avoid Harmful Asbestos Dust

Avoid breathing dust that may be generated when handling components containing asbestos fibers. Inhaled asbestos fibers may cause lung cancer.

Components in products that may contain asbestos fibers are brake pads, brake band and lining assemblies, clutch plates, and some gaskets. The asbestos used in these components is usually found in a resin or sealed in some way. Normal handling is not hazardous as long as airborne dust containing asbestos is not generated.

Avoid creating dust. Never use compressed air for cleaning. Avoid brushing or grinding material containing asbestos. When servicing, wear an approved respirator. A special vacuum cleaner is recommended to clean asbestos. If not available, apply a mist of oil or water on the material containing asbestos. Keep bystanders away from the area.

Service Tires Safely



MIF

Explosive separation of a tire and rim parts can cause serious injury or death.


Do not attempt to mount a tire unless you have the proper equipment and experience to perform the job.

Always maintain the correct tire pressure. Do not inflate the tires above the recommended pressure. Never weld or heat a wheel and tire assembly. The heat can cause an increase in air pressure resulting in a tire explosion. Welding can structurally weaken or deform the wheel.

When inflating tires, use a clip-on chuck and extension hose long enough to allow you to stand to one side and NOT in front of or over the tire assembly. Use a safety cage if available.

Check wheels for low pressure, cuts, bubbles, damaged rims or missing lug bolts and nuts.

Avoid Injury From Rotating Blades, Augers And PTO Shafts

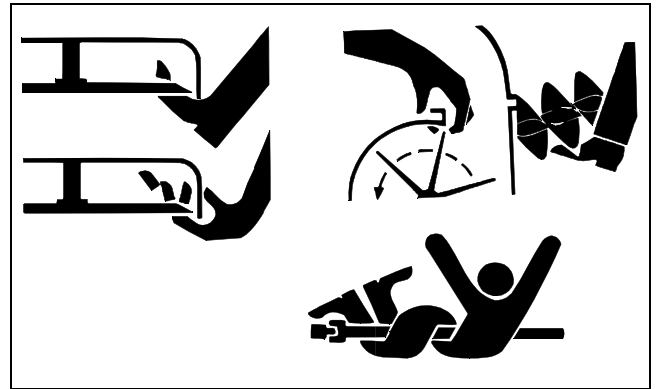

MIF


Keep hands and feet away while machine is running. Shut off power to service, lubricate or remove mower blades, augers or PTO shafts.

Dispose Of Waste Properly

Improperly disposing of waste can threaten the environment and ecology. Potentially harmful waste used with John Deere equipment include such items as oil, fuel, coolant, brake fluid, filters, and batteries. Use leakproof containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them. Do not pour waste onto the ground, down a drain, or into any water source. Inquire on the proper way to recycle or dispose of waste from your local environmental or recycling center, or from your John Deere dealer.

SAFETY

Handle Chemical Products Safely

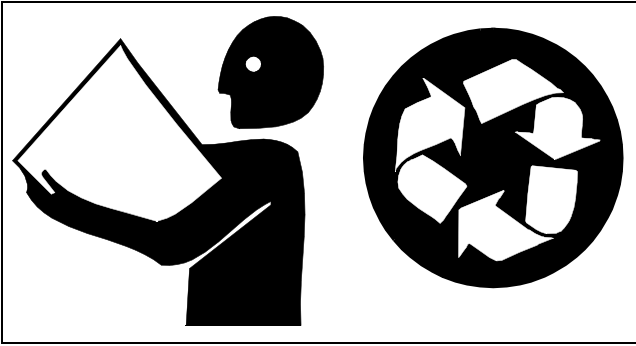

MIF

Direct exposure to hazardous chemicals can cause serious injury. Potentially hazardous chemicals used with John Deere equipment include such items as lubricants, coolants, paints, and adhesives.

A Material Safety Data Sheet (MSDS) provides specific details on chemical products: physical and health hazards, safety procedures, and emergency response techniques. Check the MSDS before you start any job using a hazardous chemical. That way you will know exactly what the risks are and how to do the job safely. Then follow procedures and recommended equipment.

Live With Safety



MIF

Before returning machine to customer, make sure machine is functioning properly, especially the safety systems. Install all guards and shields.

SPECIFICATIONS & INFORMATION TABLE OF CONTENTS







Table of Contents

Fastener Torques	9
Inch Fastener Torque Values	9
Metric Fastener Torque Values	10
General Information	11
Engine Oil.....	11
Engine Break - in Oil	11
Alternative Lubricants	12
Synthetic Lubricants	12
Lubricant Storage	12
Mixing Of Lubricants.....	12
Chassis Grease	12
Serial Number Locations	13
Identification Numbers.....	13

SPECIFICATIONS & INFORMATION FASTENER TORQUES

Fastener Torques

Inch Fastener Torque Values

SAE Grade and Head Markings	1 or 2 ^b No Marks 	5 5.1 5.2 	8 8.2 
SAE Grade and Nut Markings	2 No Marks 	5 	8 

SIZE	Grade 1		Grade 2b				Grade 5, 5.1 or 5.2				Grade 8 or 8.2					
	Lubricated a		Dry a		Lubricated a		Dry a		Lubricated a		Dry a		Lubricated a		Dry a	
	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft
1/4	3.7	2.8	4.7	3.5	6	4.5	7.5	5.5	9.5	7	12	9	13.5	10	17	12.5
5/16	7.7	5.5	10	7	12	9	15	11	20	15	25	18	28	21	35	26
3/8	14	10	17	13	22	16	27	20	35	26	44	33	50	36	63	46
7/16	22	16	28	20	35	26	44	32	55	41	70	52	80	58	100	75
1/2	33	25	42	31	53	39	67	50	85	63	110	80	120	90	150	115
9/16	48	36	60	45	75	56	95	70	125	90	155	115	175	130	225	160
5/8	67	50	85	62	105	78	135	100	170	125	215	160	215	160	300	225
3/4	120	87	150	110	190	140	240	175	300	225	375	280	425	310	550	400
7/8	190	140	240	175	190	140	240	175	490	360	625	450	700	500	875	650
1	290	210	360	270	290	210	360	270	725	540	925	675	1050	750	1300	975
1-1/8	470	300	510	375	470	300	510	375	900	675	1150	850	1450	1075	1850	1350
1-1/4	570	425	725	530	570	425	725	530	1300	950	1650	1200	2050	1500	2600	1950
1-3/8	750	550	950	700	750	550	950	700	1700	1250	2150	1550	2700	2000	3400	2550
1-1/2	1000	725	1250	925	990	725	1250	930	2250	1650	2850	2100	3600	2650	4550	3350

DO NOT use these hand torque values if a different torque value or tightening procedure is given for a specific application. Torque values listed are for general use only and include a ±10% variance factor. Check tightness of fasteners periodically. DO NOT use air powered wrenches for assembly.

Shear bolts are designed to fail under predetermined loads. Always replace shear bolts with identical grade.

Fasteners should be replaced with the same grade. Make sure fastener threads are clean and that you properly start thread engagement. This will prevent them from failing when tightening.









When bolt and nut combination fasteners are used, torque values should be applied to the NUT instead of the bolt head. Tighten toothed or serrated-type lock nuts to the full torque value.

a "Lubricated" means coated with a lubricant such as engine oil, or fasteners with phosphate and oil coatings. "Dry" means plain or zinc plated (yellow dichromate - Specification JDS117) without any lubrication.

b "Grade 2" applies for hex cap screws (Not Hex Bolts) up to 152 mm (6 in.) long. "Grade 1" applies for hex cap screws over 152 mm (6 in.) long, and for all other types of bolts and screws of any length. Reference: JDS - G200

SPECIFICATIONS & INFORMATION FASTENER TORQUES

Metric Fastener Torque Values

Property Class and Head Markings				
Property Class and Nut Markings				

SIZE	Class 4.8				Class 8.8 or 9.8				Class 10.9				Class 12.9			
	Lubricated a		Dry a		Lubricated a		Dry a		Lubricated a		Dry a		Lubricated a		Dry a	
	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft
M6	4.8	3.5	6	4.5	9	6.5	11	8.5	13	9.5	17	12	15	11.5	19	14.5
M8	12	8.5	15	11	22	16	28	20	32	24	40	30	37	28	47	35
M10	23	17	29	21	43	32	55	40	63	47	80	60	75	55	95	70
M12	40	29	50	37	75	55	95	70	110	80	140	105	130	95	165	120
M14	63	47	80	60	120	88	150	110	175	130	225	165	205	150	260	109
M16	100	73	125	92	190	140	240	175	275	200	350	225	320	240	400	300
M18	135	100	175	125	260	195	330	250	375	275	475	350	440	325	560	410
M20	190	140	240	180	375	275	475	350	530	400	675	500	625	460	800	580
M22	260	190	330	250	510	375	650	475	725	540	925	675	850	625	1075	800
M24	330	250	425	310	650	475	825	600	925	675	1150	850	1075	800	1350	1000
M27	490	360	625	450	950	700	1200	875	1350	1000	1700	1250	1600	1150	2000	1500
M30	675	490	850	625	1300	950	1650	1200	1850	1350	2300	1700	2150	1600	2700	2000
M33	900	675	1150	850	1750	1300	2200	1650	2500	1850	3150	2350	2900	2150	3700	2750
M36	1150	850	1450	1075	2250	1650	2850	2100	3200	2350	4050	3000	3750	2750	4750	3500

DO NOT use these hand torque values if a different torque value or tightening procedure is given for a specific application. Torque values listed are for general use only and include a $\pm 10\%$ variance factor. Check tightness of fasteners periodically. DO NOT use air powered wrenches for assembly.

Shear bolts are designed to fail under predetermined loads. Always replace shear bolts with identical grade. Fasteners should be replaced with the same class. Make sure fastener threads are clean and that you properly start thread engagement. This will prevent them from failing

when tightening.

When bolt and nut combination fasteners are used, torque values should be applied to the NUT instead of the bolt head. Tighten toothed or serrated-type lock nuts to the full torque value.

a "Lubricated" means coated with a lubricant such as engine oil, or fasteners with phosphate and oil coatings. "Dry" means plain or zinc plated (Yellow Dichromate - Specification JDS117) without any lubrication. Reference: JDS - G200

SPECIFICATIONS & INFORMATION GENERAL INFORMATION

General Information

Engine Oil

Use the appropriate oil viscosity based on the expected air temperature range during the period between recommended oil changes. Operating outside of these recommended oil air temperature ranges may cause premature engine failure.

The following John Deere oil is PREFERRED:

- TORQ - GARD SUPREME® - SAE 5W-30;
- PLUS - 50® - SAE 15W-40;

Other oils may be used if above John Deere oils are not available, provided they meet one of the following specifications:

- SAE 15W-40 - API Service Classification CH-4 or higher;
- SAE 10W-30 - API Service Classification CG-4 (4-cycle) or higher;

John Deere Dealers: You may want to cross-reference the following publications to recommend the proper oil for your customers:

- Module DX, ENOIL2 in JDS - G135;
- Section 530, Lubricants & Hydraulics, of the John Deere Merchandise Sales Guide;
- Lubrication Sales Manual PI7032.

Engine Break - in Oil

IMPORTANT: Avoid damage! ONLY use a quality break-in oil in rebuilt or remanufactured engines for the first 5 hours (maximum) of operation. DO NOT use oils with heavier viscosity weights than SAE 5W-30 or oils meeting specifications API SG or SH, these oils will not allow rebuilt or remanufactured engines to break-in properly.

The following John Deere oil is PREFERRED:

- **BREAK - IN ENGINE OIL.**

John Deere BREAK - IN ENGINE OIL is formulated with special additives for aluminum and cast iron type engines to allow the power cylinder components (pistons, rings, and liners as well) to “wear-in” while protecting other engine components, valve train and gears, from abnormal wear. Engine rebuild instructions should be followed closely to determine if special requirements are necessary.

John Deere BREAK - IN ENGINE OIL is also recommended for non-John Deere engines, both aluminum and cast iron types.


The following John Deere oil is **also recommended as a break-in engine oil:**

- TORQ - GARD SUPREME® - SAE 5W-30.

If the above recommended John Deere oils are not available, use a break-in engine oil meeting the following specification during the first 5 hours (maximum) of operation:

- SAE 5W-30 - API Service Classification SE or higher.

IMPORTANT: Avoid damage! After the break-in period, use the John Deere oil that is recommended for this engine.

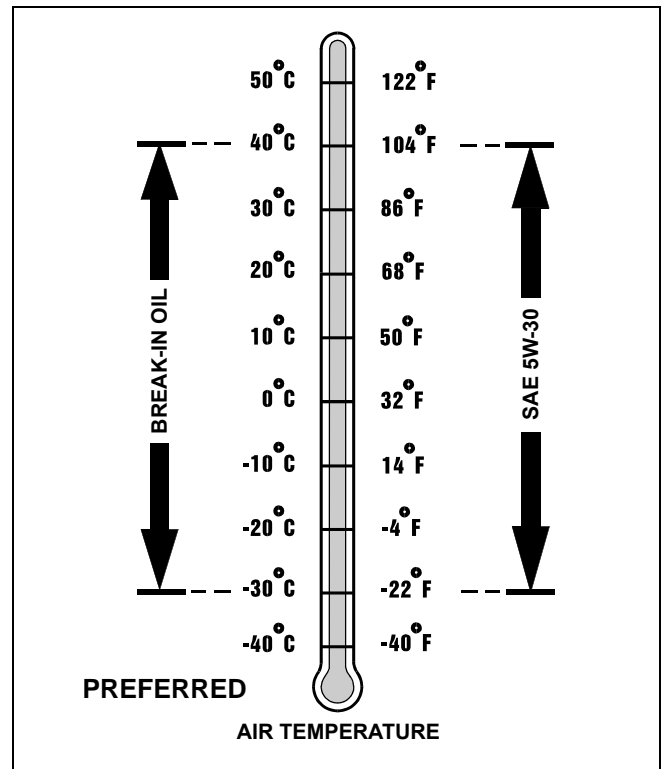

John Deere Dealers: You may want to cross-reference the following publications to recommend the proper oil for your customers:

- Module DX, ENOIL4 in JDS - G135;
- Section 530, Lubricants & Hydraulics, of the John Deere Merchandise Sales Guide;
- Lubrication Sales Manual PI7032.

SPECIFICATIONS & INFORMATION GENERAL INFORMATION

Alternative Lubricants

Conditions in certain geographical areas outside the United States and Canada may require different lubricant recommendations than the ones printed in this technical manual or the operator's manual. Consult with your John Deere Dealer, or Sales Branch, to obtain the alternative lubricant recommendations.

IMPORTANT: Avoid damage! Use of alternative lubricants could cause reduced life of the component.

If alternative lubricants are to be used, it is recommended that the factory fill be thoroughly removed before switching to any alternative lubricant.

Synthetic Lubricants

Synthetic lubricants may be used in John Deere equipment if they meet the applicable performance requirements (industry classification and/or military specification) as shown in this manual.

The recommended air temperature limits and service or lubricant change intervals should be maintained as shown in the operator's manual.

Avoid mixing different brands, grades, or types of oil. Oil manufacturers blend additives in their oils to meet certain specifications and performance requirements. Mixing different oils can interfere with the proper functioning of these additives and degrade lubricant performance.

Lubricant Storage

All machines operate at top efficiency only when clean lubricants are used. Use clean storage containers to handle all lubricants. Store them in an area protected from dust, moisture, and other contamination. Store drums on their sides. Make sure all containers are properly marked as to their contents. Dispose of all old, used containers and their contents properly.

Mixing Of Lubricants

In general, avoid mixing different brands or types of lubricants. Manufacturers blend additives in their lubricants to meet certain specifications and performance requirements. Mixing different lubricants can interfere with the proper functioning of these additives and lubricant properties which will downgrade their intended specified performance.

Chassis Grease


Use the following grease based on the air temperature range. Operating outside of the recommended grease air temperature range may cause premature failures.

The following John Deere grease is PREFERRED:

- NON-CLAY HIGH-TEMPERATURE EP GREASE® - JDM J13E4, NLGI Grade 2.
- Multi-Purpose SD Polyurea Grease
- Multi-Purpose HD Lithium Complex Grease

Other greases may be used if above preferred John Deere grease is not available, provided they meet the following specification:

- John Deere Standard JDM J13E4, NLGI Grade 2.

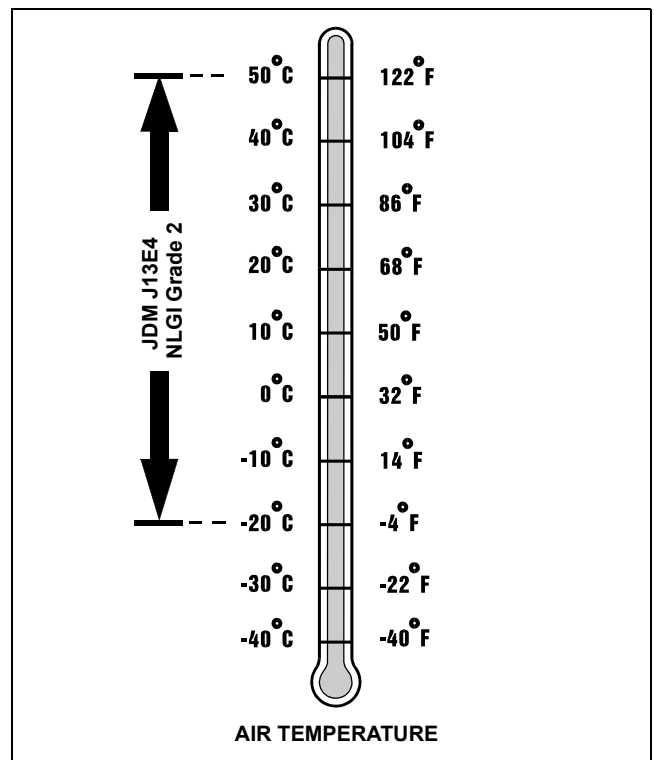

MIF

John Deere Dealers: You may want to cross-reference the following publications to recommend the proper grease for your customers:


- Module DX,GREA1 in JDS - G135;
- Section 530, Lubricants & Hydraulics, of the John Deere Merchandise Sales Guide;
- Lubrication Sales Manual P17032.

SPECIFICATIONS & INFORMATION SERIAL NUMBER LOCATIONS

Serial Number Locations

Identification Numbers

When ordering parts or submitting a warranty claim, it is IMPORTANT that the machine product identification number (PIN) and component serial numbers are included. The location of the PIN and component serial numbers are shown.

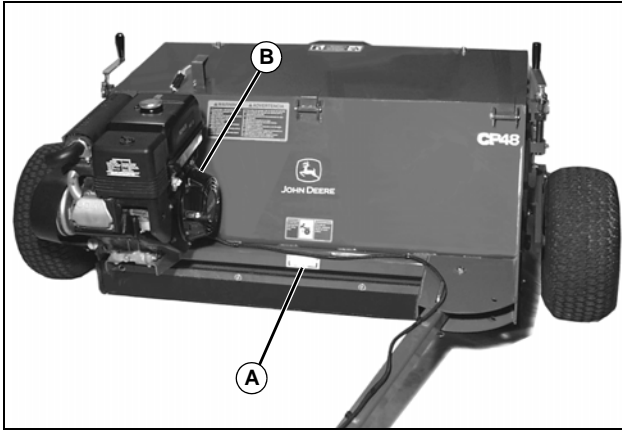

MX19825

Machine Product Identification Number (A)

Engine Serial Number (B)

ENGINE TABLE OF CONTENTS

Table of Contents

Specifications17

General Specifications17

Adjustment Specifications17

Repair Specifications.....17

Torque Specifications.....20

Tools and Materials22

Special or Required Tools22

Other Materials.....22

Component Location.....23

Engine Components.....23

Diagnostics24

Engine Troubleshooting24

Tests and Adjustments27

Fuel System Tests.....27

Fuel Flow Test.....27

Governor Cross Shaft

Position Adjustment.....27

Governor Lever Adjustment28

Slow Idle Speed Adjustments.....28

Fast Idle Speed Adjustments28

Cylinder Compression Test29

Crankcase Vacuum Test.....29

Automatic Compression Release

(ACR) Check31

Valve Tappet Clearance Adjustment.....31

Repair.....32

Air Cleaner Assembly

Removal and Installation32

Fuel Tank Removal and Installation33

Fuel Sediment Bowl Cleaning33

Muffler Removal and Installation34

Spark Plug Removal and Installation34

Engine Removal and Installation.....34

External Governor and Throttle Linkage

Removal and Installation35

Carburetor Removal and Installation.....36

Carburetor Disassembly and Assembly36

Blower Housing Removal and Installation....38

Flywheel Removal,

Inspection, and Installation.....39

Ignition Coil Removal and Installation40

Valve Cover/Breather

Removal and Installation41

Cylinder Head Removal and Installation41

Rocker Arm and Push Rod

Removal and Installation 42

Valve Removal, Inspection, and Installation 42

Valve Face Reconditioning..... 43

Valve Lapping..... 43

Valve Condition..... 43

Gear Reduction Assembly

Removal and Installation 44

Closure Plate Removal and Installation..... 46

Oil Sensor Removal and Installation..... 47

Governor Gear Removal and Installation 47

Governor Cross Shaft

Removal and Installation 48

Balance Shaft Removal and Installation..... 48

Camshaft and Tappet

Removal and Installation 49

Piston Removal and Installation 50

Piston Ring Installation 51

Measuring Piston to Bore Clearance 52

Cylinder De-glazing 52

Cylinder Resizing..... 52

Crankshaft Removal,

Inspection, and Installation 53

Crankcase Inspection 53

Oil Seal and Bearing

Removal and Installation 54

Retractable Starter

Removal and Installation 54

Retractable Starter Rope Replacement..... 54

Pawl Removal and Replacement..... 55

Recoil Spring, Pulley, and Housing

Replacement..... 56

ENGINE SPECIFICATIONS

Specifications

General Specifications

Make	Kohler
Model	Command Pro 12 CS12RT
Peak Torque @ 2000 rpm	22.6 N•m (16.7 lb-ft)
High Engine RPM	3450 (±100)
Bore	85.0 mm (3.35 in.)
Stroke	63.0 mm (2.48 in.)
Displacement	360 cc (22 cu in.)
Cylinders	1
Stroke/Cycle	4
Valves	Overhead
Crankshaft Type	Horizontal (Counterbalanced)
Compression Ratio	8.1:1
Standard Compression Pressure (With ACR in Operation)	400 - 600 kPa (57 - 85 psi)
Compression Release	Automatic/Centrifugal
Cooling System	Air Cooled
Air Filter	Paper with Foam
Lubrication	Splash System
Starting	Recoil
Fuel Capacity	6.9 L (7.3 U.S qt)
Weight (Approximate)	31.9 kg (70.5 lb)
Oil Capacity	1.1 L (1.2 U.S. qt)
Angle of Operation (maximum) at Full Oil Level	20°
Spark Plug Type NGK	BPR4ES (13/16 in. hex)
Spark Plug Type Champion®	RN14YC (13/16 in. hex)
Spark Plug Type Champion®	RC14YC (5/8 in. hex)

Adjustment Specifications

Spark Plug Gap	0.76 mm (0.030 in.)
Ignition Module Air Gap	0.4 - 0.6 mm (0.015 - 0.023 in.)

Repair Specifications

Camshaft:

End Play	0.05 mm (0.0020 in.)
Bore ID	15.965 - 15.990 mm (0.6285 - 0.6295 in.)
Bore ID - Maximum Wear Llimit	15.95 mm (0.628 in.)
Camshaft Bearing Surface OD - Maximum Wear Llimit	16.05 mm (0.649 in.)
Cam Lobe Lift - Intake and Exhaust	32.55 ± 0.05 mm (1.28 ± 0.002 in.)
Cam Lobe Diameter - Intake and Exhaust	26.08 ± 0.05 mm (1.03 ± 0.002 in.)

ENGINE SPECIFICATIONS

Connecting Rod:

Connecting Rod to Crankpin Running Clearance New	0.016 - 0.046 mm (0.0006 - 0.0018 in.)
Connecting Rod to Crankpin Running Clearance Maximum Wear Limit	0.1 mm (0.004 in.)
Connecting Rod to Crankpin Side Clearance	0.20 - 0.65 mm (0.0079 - 0.0256 in.)
Connecting Rod to Piston Pin Running Clearance	0.006 - 0.025 mm (0.0002 - 0.0001 in.)

Piston Pin End ID:

New	20.006 - 20.020 mm (0.7867 - 0.7882 in.)
Maximum Wear Limit	20.10 mm (0.791 in.)

Connecting Rod Journal End ID:

New	36.000 - 36.015 mm (1.4173 - 1.4179 in.)
Maximum Wear Limit	36.115 mm (1.4219 in.)

Crankshaft:

End Play (Free)	0.04 mm (0.0015 in.)
-----------------	----------------------

Flywheel End Main Bearing Journal ID:

New	80 mm (3.149 in.)
Maximum Wear Limit	80.05 mm (3.1515 in.)

PTO End Main Bearing Journal ID:

New	72 mm (2.834 in.)
Maximum Wear Limit	72.05 mm (2.836 in.)

Connecting Rod Journal OD:

New	35.969 - 35.984 mm (1.4161 - 1.4167 in.)
Maximum Wear Limit	35.9 mm (1.4134 in.)

Crankshaft:

Runout (Either End)	0.02 mm (0.0008 in.)
Limit (Either End)	0.04 mm (0.0016 in.)

Cylinder Bore ID:

New	85.00 - 85.02 mm (3.3465 - 3.3472 in.)
Maximum Wear Limit	85.65 mm (3.372 in.)
Maximum Out of Round	0.05 mm (0.002 in.)

Cylinder Head:

Maximum Out of Flatness	0.1 mm (0.004 in.)
-------------------------	--------------------

Governor Shaft:

Governor Shaft Position Exposed Length	36.0 ± 0.6 mm (1.47 ± 0.023 in.)
--	----------------------------------

Piston to Piston Pin:

Clearance	0.004 - 0.020 mm (0.0002 - 0.0008 in.)
-----------	--



Suggest:

If the above button click is invalid.

Please download this document

first, and then click the above link

to download the complete manual.

Thank you so much for reading

ENGINE SPECIFICATIONS

Piston Pin Bore ID:

New 20.004 - 20.015 mm (0.7876 - 0.7880 in.)
Maximum Wear Limit 20.03 mm (0.7886 in.)

Piston Pin OD:

New 19.995 - 20.000 mm (0.7872 - 0.7874 in.)
Maximum Wear Limit 19.98 mm (0.787 in.)

Ring to Groove Side Clearance:

Top Compression Ring 0.04 - 0.08 mm (0.0016 - 0.003 in.)
Middle Compression Ring 0.03 - 0.07 mm (0.0012 - 0.0028 in.)
Maximum Wear Limit 0.1 mm (0.004 in.)

Ring End Gap:

Top Compression Ring 0.25 - 0.4 mm (0.010 - 0.016 in.)
Middle Compression Ring 0.25 - 0.4 mm (0.010 - 0.016 in.)
Oil Control Ring 0.2 - 0.7 mm (0.0079 - 0.028 in.)

Piston Thrust Face OD:

New 84.954 - 84.998 mm (3.3446 - 3.3464 in.)
Maximum Wear Limit 84.898 mm (3.3424 in.)

Piston Thrust Face to Cylinder Bore Running Clearance 0.002 - 0.066 mm (0.0001 - 0.0026 in.)

Intake Valve:

Head Diameter 32.0 mm (1.26 in.)
Stem Diameter 5.948 - 5.963 mm (0.2342 - 0.2348 in.)
Length 88.1 mm (3.47 in.)
Face/Seat Width 0.7 - 0.9 mm (0.0276 - 0.354 in.)
Face/Seat Limit 1.4 mm (0.055 in.)
Face Seat Angle (Insert Area) 90°
Valve Stem Bend Limit 0.01 mm (0.0004 in.)
Valve Seat Contact Width (Standard) 0.7 mm (0.03 in.)
Valve Seat Contact Width (Limit) 1.7 mm (0.067 in.)

Intake Valve Guide ID:

New 6.0 - 6.012 mm (0.2362 - 0.2367 in.)
Maximum Wear Limit 6.10 mm (0.240 in.)
Valve Stem to Valve Guide Clearance 0.037 - 0.064 mm (0.0015 - 0.0025 in.)

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>