

890 Auger Platform With Hay Conditioner

**John Deere Ottumwa Works
OME87945 Issue B7**

LITHO IN U.S.A.
ENGLISH

Contents

	Page		Page
Safety	05-1		
Transporting	10-1		
Detaching and Attaching the Platform		Attachments	
Detaching the Platform	15-1	Lubrication and Maintenance	
Attaching the Platform	15-7	Symbols	30-1
Operating the Auger Platform		Perform Lubrication and Maintenance	30-1
Prestarting Checks	20-1	Grease	30-2
Checking Knife Drive Belt Tension	20-1	Gear Oil	30-2
Breaking in the Auger Platform	20-2	Alternate	30-3
Producing Uniform Windrows	20-2	Lubrication Schedule	
Determining Ground Speeds	20-3	Lubrication Label—Conditioner and	
Knockdown Bar	20-4	Drive Lines	30-4
Cutterbar	20-5	Lubrication Label—Left-Hand Side of	
Knife Overlap	20-5	Platform	30-5
Knife Hold-Downs	20-6	Lubrication Label—Right-Hand Side of	
Platform Guard Angle	20-6	Platform	30-6
Gauge Shoes	20-6	Every 10 Hours	30-7
Reel	20-7	Every 10 Hours	30-8
Reel Speeds	20-7	Every 50 Hours	30-9
Auger	20-8	Troubleshooting	
Conditioner	20-8	Cutting	35-1
Platform Float	20-9	Feeding—Reel and Auger	35-6
Windrow Formation	20-9	Feeding—Conditioner	35-8
Dirt or Mud Buildup	20-9	Windrow Forming	35-9
Cutting		Miscellaneous	35-10
Alfalfa	20-10	Service	
Grass	20-11	Practice Safe Service Procedures	40-1
Tall Crop	20-12	General	
Adjusting		Care of Chains	40-1
Swath Flap	20-12	Care of V-Belts	40-2
Platform Float	20-13	Installing O-Rink Connector Link	40-3
Platform Guard Angle	20-13	Tightening Bearing Locking Collars	40-4
Gauge Shoes	20-14	Raising Reel Tooth Bar	40-4
Cutting Height	20-15	Changing Reel Drive Double Sprocket	40-5
Knock Down Bar	20-16	Adjusting	
Removing		Reel Drive Belt	40-7
End Clean Out Panels	20-16	Reel Drive Chain	40-8
Center Deck Sheet	20-17	Reel Position	40-10
		Reel Cam Release	40-13

Continued on next page

All information, illustrations and specifications in this manual are based on the latest information available at the time of publication. The right is reserved to make changes at any time without notice.

OME87945 B7-19-26SEP97

COPYRIGHT© 1996
DEERE & COMPANY
Moline, Illinois
All rights reserved
A John Deere ILLUSTRATION™ Manual

Contents

	Page
<i>Adjusting—Continued</i>	
Roll Spacing	40-14
Roll Pressure	40-16
Roll Timing	40-17
Knife Drive Belt	40-18
Knife Drive Belt Alignment	40-18
Strippers, Upper and Lower to Auger	40-19
Strippers, Center to Auger	40-20
Cam Followers to Reel Cam	40-21
Replace	
Reel Drive Belt	40-22
Knife Drive Belt	40-23
Reel Cam Followers	40-24
Removing Reel Tooth Bar	40-25
Reel Tooth Bar Bearings	40-26
Replacing Reel Teeth	40-28
Cutterbar	
Timing Knives	40-30
Knife Overlap	40-31
Removing Knives	40-31
Installing Knives	40-33
Knife Sections	40-34
Replacing Bolt-On Knife Sections	40-34
Replacing Center Knife Sections	40-35
Adjusting Regular Hold-Downs	40-36
Adjusting Non-Clog Hold-Downs	40-37
Installing Regular Hold-Downs	40-38
Installing Non-Clog Hold-Downs	40-42
Storage	
Storage	
Beginning of Season	45-1
End of Season	45-2
Specifications	50-1
Identification Numbers	55-1
Crime Prevention Tips	60-1
Index	

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>

Safety

RECOGNIZE SAFETY INFORMATION

This is the safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.



DX,ALERT -19-03MAR93

T81389 -UN-07DEC68

UNDERSTAND SIGNAL WORDS

A signal word—DANGER, WARNING, or CAUTION—is used with the safety-alert symbol. DANGER identifies the most serious hazards.

DANGER or WARNING safety signs are located near specific hazards. General precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.



DX,SIGNAL -19-03MAR93

TS187 -19-30SEP88


FOLLOW SAFETY INSTRUCTIONS

Carefully read all safety messages in this manual and on your machine safety signs. Keep safety signs in good condition. Replace missing or damaged safety signs. Be sure new equipment components and repair parts include the current safety signs. Replacement safety signs are available from your John Deere dealer.

Learn how to operate the machine and how to use controls properly. Do not let anyone operate without instruction.

Keep your machine in proper working condition. Unauthorized modifications to the machine may impair the function and/or safety and affect machine life.

If you do not understand any part of this manual and need assistance, contact your John Deere dealer.

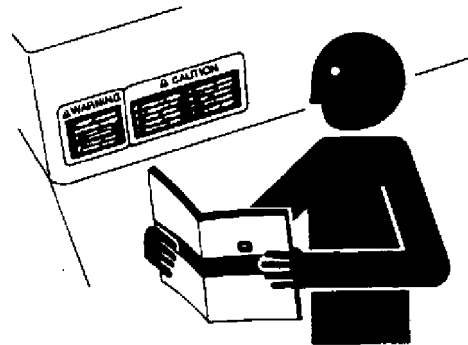

DX,READ -19-03MAR93

TS201 -UN-23AUG88



BEFORE OPERATING

Become familiar with operator's manual, machine decals, and Safety section of this manual.


Remove foreign objects from machine.

Become familiar with all controls effecting machine functions.

Make sure everyone is clear of the machine. Never allow riders on machine or near machine while it is running.

Be sure shields and guards are in place and in good condition before starting. Some driveline and hookup shields are designed to stop rotating upon contact while the shaft continues to rotate.

Check rotating shields to ensure they are free to turn. Make necessary repairs if these shields will not turn.



OME.890AP_OPER -19-11FEB97

E23482 -UN-08MAY89


WEAR PROTECTIVE CLOTHING

Wear close fitting clothing and safety equipment appropriate to the job.

Prolonged exposure to loud noise can cause impairment or loss of hearing.

Wear a suitable hearing protective device such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.

Operating equipment safely requires the full attention of the operator. Do not wear radio or music headphones while operating machine.

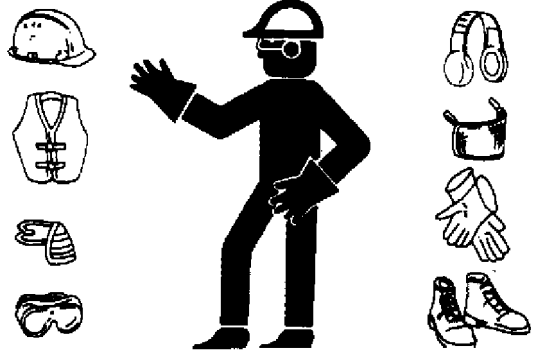

DX.WEAR -19-10SEP90

TS206 -UN-23AUG88




HANDLE CHEMICAL PRODUCTS SAFELY

Direct exposure to chemical products can cause severe skin irritation and injury. Hazardous fumes can be generated when handling the chemicals.

Wear close fitting clothing and a face mask when handling chemicals. Dispose of chemical waste and packaging material properly.

A Material Safety Data Sheet provides specific details on chemical products and physical dangers, safety procedures, and emergency response techniques. User awareness and training is required under U.S. workplace and environmental laws. See your John Deere dealer for information on chemical products used with John Deere equipment.

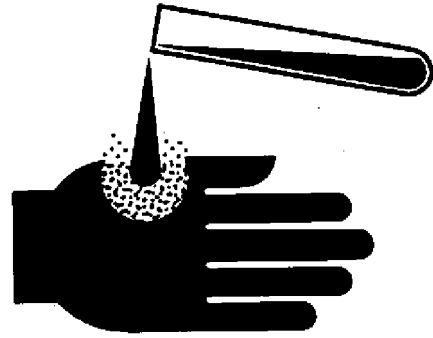

DX,MSDS -19-28SEP90

-UN-23AUG68
TS272

STAY CLEAR OF ROTATING DRIVELINES

Entanglement in rotating driveline can cause serious injury or death.

Keep tractor master shield and driveline shields in place at all times. Make sure rotating shields turn freely.

Wear close fitting clothing. Stop the engine and be sure PTO driveline is stopped before making adjustments, connections, or cleaning out PTO driven equipment.




DX,PTO -19-12SEP95

-UN-22AUG95
TS1644

USE SAFETY LIGHTS AND DEVICES

Prevent collisions between other road users, slow moving tractors with attachments or towed equipment, and self-propelled machines on public roads. Frequently check for traffic from the rear, especially in turns, and use hand signals or turn signal lights.

Use headlights, flashing warning lights, and turn signals day and night. Follow local regulations for equipment lighting and marking. Keep lighting and marking visible and in good working order. Replace or repair lighting and marking that has been damaged or lost. An implement safety lighting kit is available from your John Deere dealer.

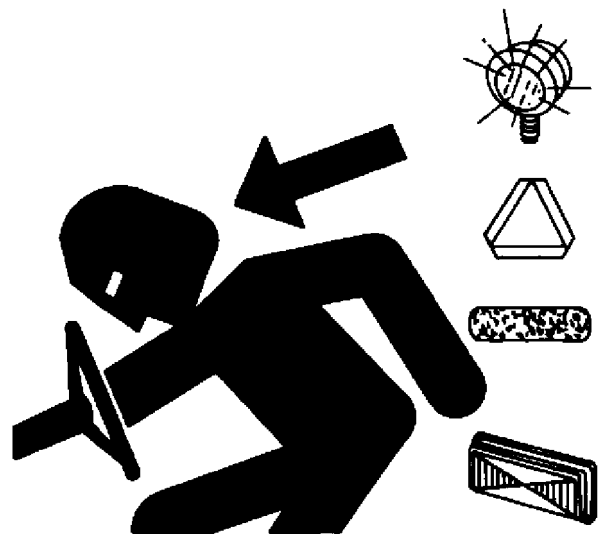

DX,FLASH -19-12SEP95

-UN-12APR90
TS951



USE PROPER TOOLS

Use tools appropriate to the work. Makeshift tools and procedures can create safety hazards.

Use power tools only to loosen threaded parts and fasteners.

For loosening and tightening hardware, use the correct size tools. DO NOT use U.S. measurement tools on metric fasteners. Avoid bodily injury caused by slipping wrenches.

Use only service parts meeting John Deere specifications.



TS779 -UN-08NOV69

DX,REPAIR -19-04JUN90

PRACTICE SAFE MAINTENANCE

Understand service procedure before doing work. Keep area clean and dry.

Never lubricate, service, or adjust machine while it is moving. Keep hands, feet, and clothing from power-driven parts. Disengage all power and operate controls to relieve pressure. Lower equipment to the ground. Stop the engine. Remove the key. Allow machine to cool.

Securely support any machine elements that must be raised for service work.

Keep all parts in good condition and properly installed. Fix damage immediately. Replace worn or broken parts. Remove any buildup of grease, oil, or debris.

Disconnect battery ground cable (-) before making adjustments on electrical systems or welding on machine.



TS218 -UN-23AUG88

DX,SERV -19-03MAR93



Suggest:

For more complete manuals. Please go to the home page.

<https://www.ebooklibonline.com>

If the above button click is invalid. Please download this document first, and then click the above link to download the complete manual.

Thank you so much for reading



AVOID HEATING NEAR PRESSURIZED FLUID LINES

Flammable spray can be generated by heating near pressurized fluid lines, resulting in severe burns to yourself and bystanders. Do not heat by welding, soldering, or using a torch near pressurized fluid lines or other flammable materials. Pressurized lines can be accidentally cut when heat goes beyond the immediate flame area.



DX,TORCH -19-03MAR93

TS953 -UN-15MAY90


AVOID HIGH-PRESSURE FLUIDS

Escaping fluid under pressure can penetrate the skin causing serious injury.

Avoid the hazard by relieving pressure before disconnecting hydraulic or other lines. Tighten all connections before applying pressure.

Search for leaks with a piece of cardboard. Protect hands and body from high pressure fluids.

If an accident occurs, see a doctor immediately. Any fluid injected into the skin must be surgically removed within a few hours or gangrene may result. Doctors unfamiliar with this type of injury should reference a knowledgeable medical source. Such information is available from Deere & Company Medical Department in Moline, Illinois, U.S.A.

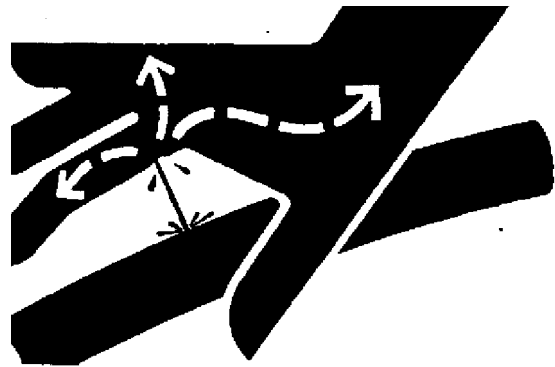


DX,FLUID -19-03MAR93

X9811 -UN-23AUG88

STORE ATTACHMENTS SAFELY

Stored attachments such as dual wheels, cage wheels, and loaders can fall and cause serious injury or death.

Securely store attachments and implements to prevent falling. Keep playing children and bystanders away from storage area.

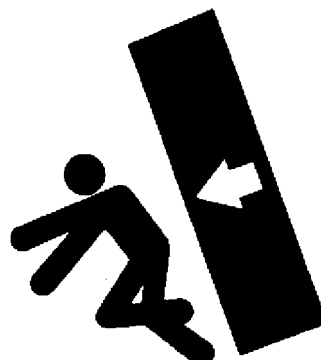

DX,STORE -19-03MAR93

T5219 -UN-23AUG88



DISPOSE OF WASTE PROPERLY


Improperly disposing of waste can threaten the environment and ecology. Potentially harmful waste used with John Deere equipment include such items as oil, fuel, coolant, brake fluid, filters, and batteries.

Use leakproof containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them.

Do not pour waste onto the ground, down a drain, or into any water source.

Air conditioning refrigerants escaping into the air can damage the Earth's atmosphere. Government regulations may require a certified air conditioning service center to recover and recycle used air conditioning refrigerants.

Inquire on the proper way to recycle or dispose of waste from your local environmental or recycling center, or from your John Deere dealer.



TS1133 -JUN-26NOV90

DX,DRAIN -19-03MAR93

<https://www.ebooklibonline.com>

Hello dear friend!

Thank you very much for reading.

Enter the link into your browser.

The full manual is available for immediate download.

<https://www.ebooklibonline.com>